


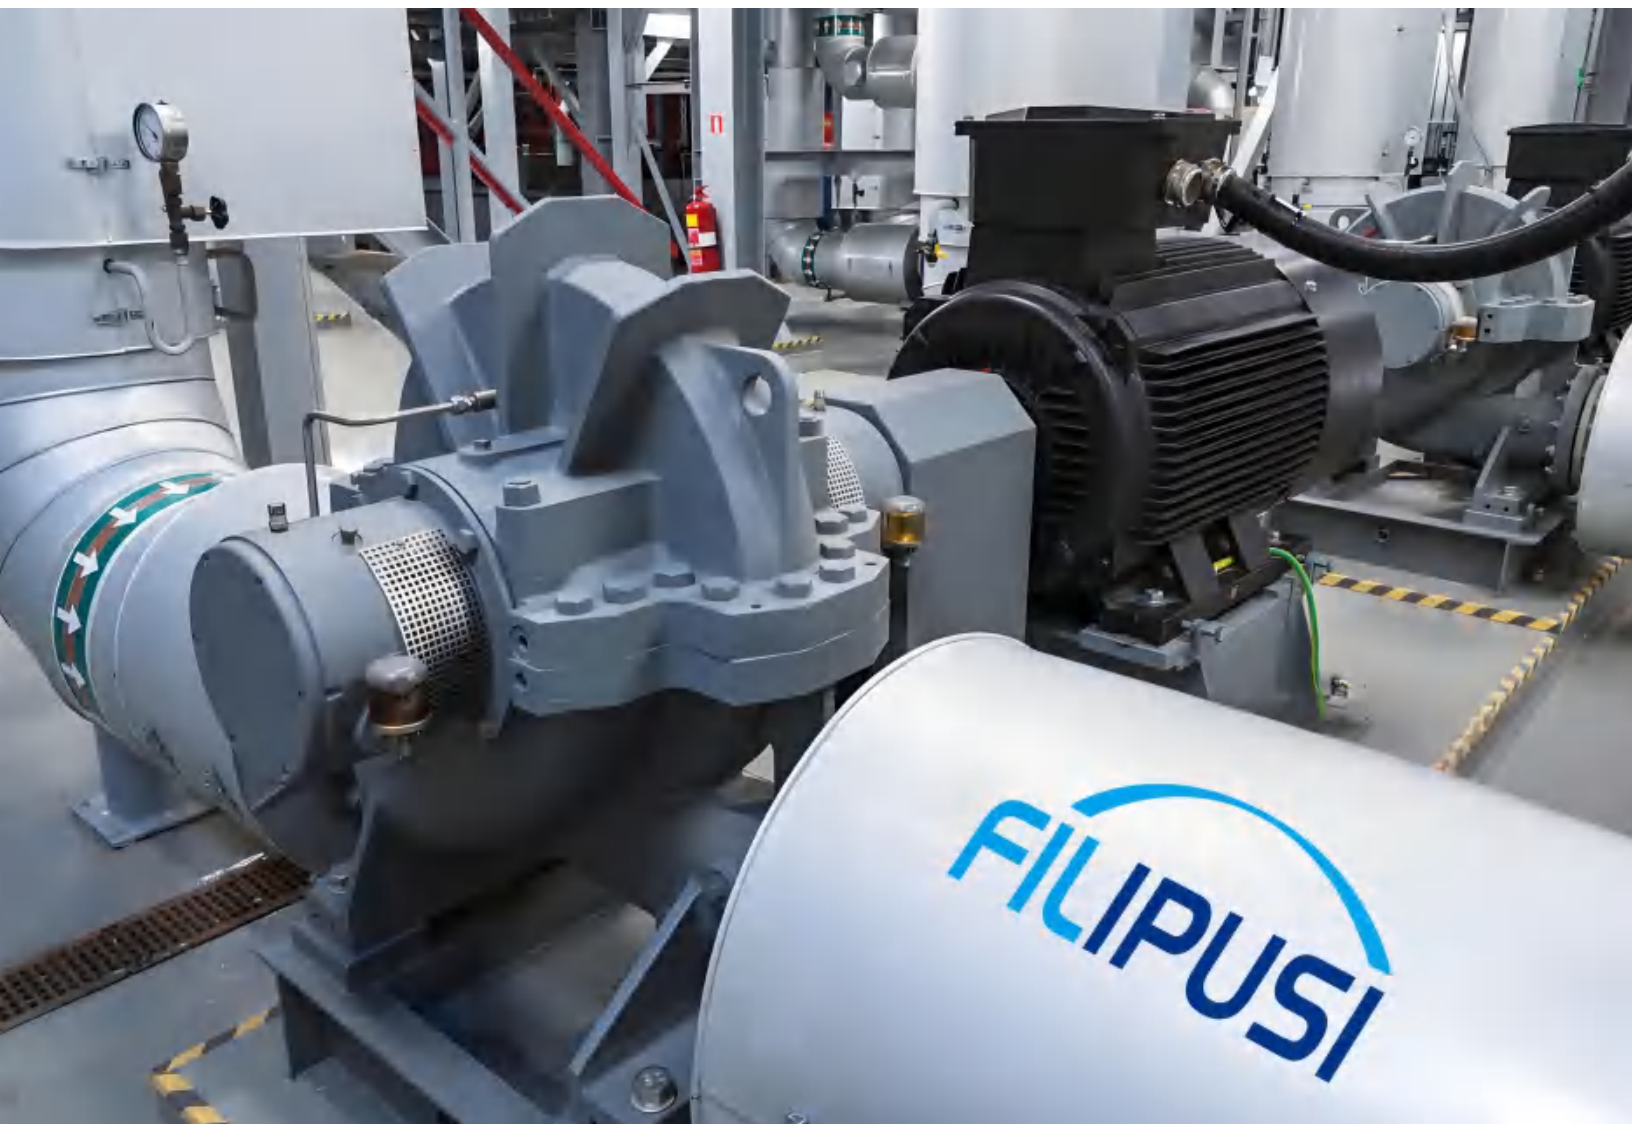

FLPS Single Stage, Double Suction Centrifugal Pumps (50 Hz)

RAISE YOUR EXPECTATIONS WITH THE IMPROVED DOUBLE SUCTION CENTRIFUGAL PUMP THAT DELIVERS MORE

Expect more with FILIPUSI FLPS pumps

With more models and more material options, the FILIPUSI FLPS single stage, double suction split case pump offers a broader hydraulic range and higher efficiency than our previous models. Built on a legacy of pump innovation, the FLPS replaces the AC Series 8100, 8300 and 9100 pump range. With flow rates exceeding 10,800 m³/hr [47,551 gpm], it can easily handle medium and large capacity systems and higher head. Manage extra-large applications with FILIPUSI's A-C Custom pump range.

Improved design and standard materials, as well as new proprietary mechanical seal options, take the FLPS beyond other pumps to increase operating efficiency, extend pump life and reduce lifecycle costs. More than 140 models make it easy to customize your FLPS split case pump to handle water and fluid management challenges for even the most demanding applications. The FLPS pump is backed by more than 20 years of experience



POWER
GENERATION



OIL & GAS



GENERAL
MANUFACTURING




POOL & LEISURE



MINING



WATER UTILITIES

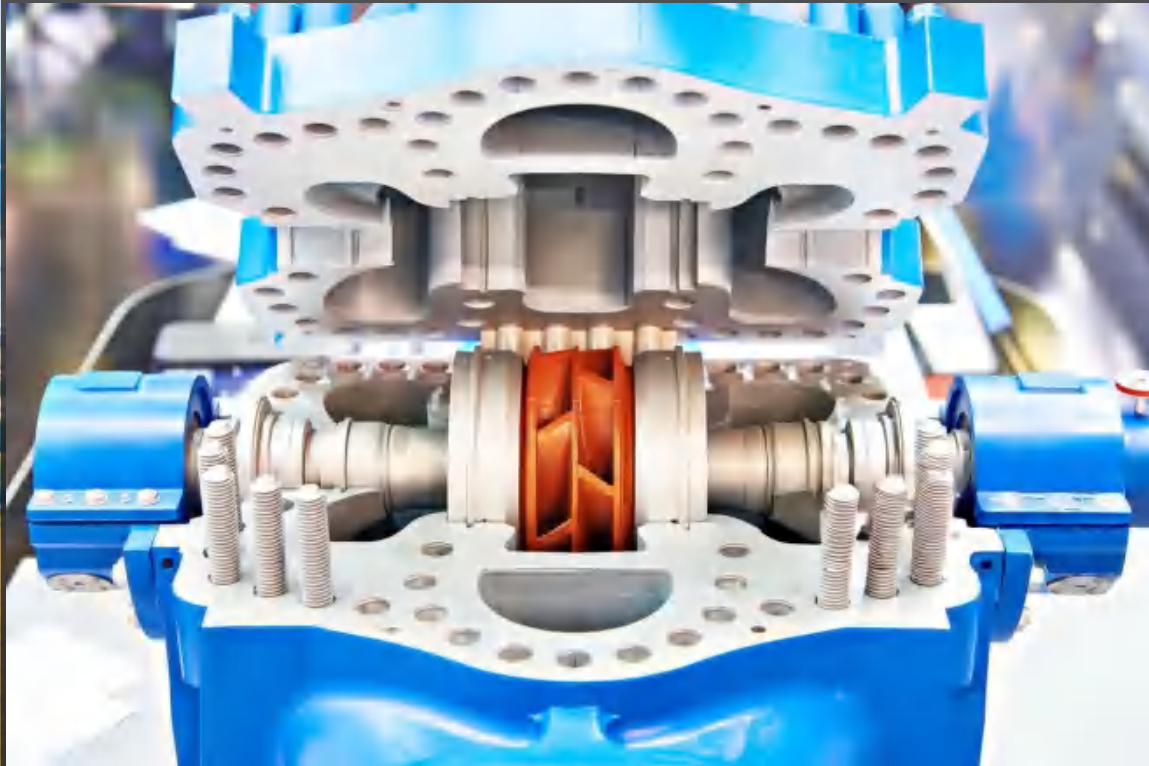


**The FILIPUSI FLPS
split case pump replaces:**



More Choices to Create Exactly the Right Pump

Engineer your pump by choosing from a full range of models, sizes and standard materials. For more aggressive applications, select upgrades including 316, Duplex and Super Duplex stainless steel for even greater corrosion resistance. You get a pump that's right for your application—with simplified installation for new or retrofit systems.

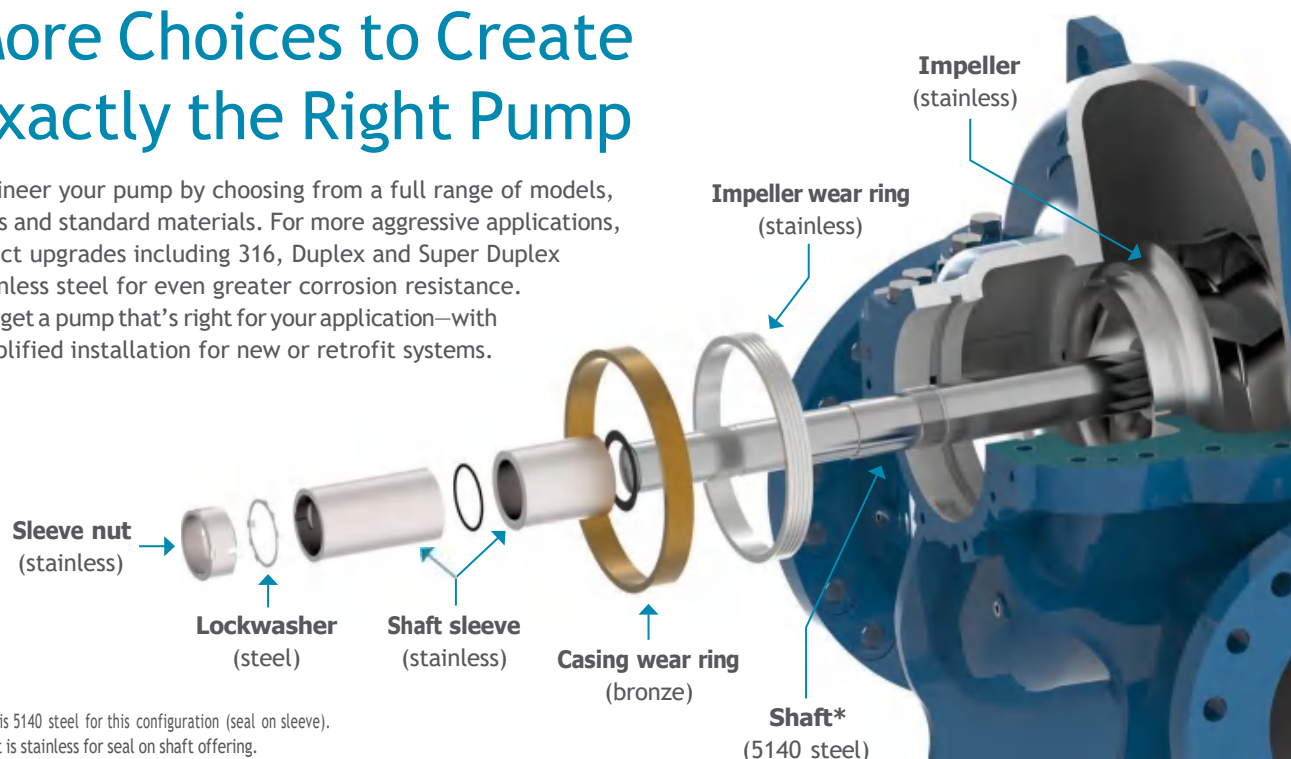

*Shaft is 5140 steel for this configuration (seal on sleeve).
Shaft is stainless for seal on shaft offering.

Component	Standard Option	Other Available Options
Casing	- Cast Iron No. 35 - Ductile Iron 65-45-12	304 SS 316 SS - Duplex SS - Super Duplex
Shaft (seal on shaft) ¹	420 SS	Duplex SS
Shaft (seal on sleeve)	5140	4135
Impeller	304 SS	316 SS - Duplex SS - Super Duplex
Casing wear rings	Bronze C90300	304 SS 316 SS - Duplex SS - Super Duplex - Nitronic 60
Impeller wear rings	304 SS	316 SS - Duplex SS - Super Duplex
Shaft sleeves	304 SS	316 SS - Duplex SS
Shaft sleeve nuts	304 SS	316 SS - Duplex SS
Packing ¹	PTFE	
Lantern ring ¹	Cast Iron	
Seal flush lines	304 SS	316SS
Mechanical seal type ²	MR1 • MR2	MR5 • MR7

¹Optional component with a standard material configuration

²For mechanical seal material configuration details, see 'Mechanical Seals' section

The improved design and standard materials of the FLPS rival other pumps' upgrade options.

Standard FLPS features include:

- 304 stainless steel impeller to resist corrosion
- Carbon/silicon carbide seal with an EPDM elastomer increases durability and expands application range
- Impeller wear rings and casing wear rings protect vital pump components and reduce downtime
- Shorter shaft extends running life
- Motor alignment screws simplify motor and coupling installation
- Integrated measurement ports accept optional temperature and vibration sensors, to help predict maintenance needs



More Opportunities to Extend Seal Life

Minimize leakage, protect equipment from excessive wear, lower pump maintenance costs and increase long-term cost-effectiveness with our new proprietary seals. The FLPS pump comes standard with a durable carbon/silicon carbide seal with an EPDM elastomer. This pairing enhances durability and expands the application range, or choose from a wide range of seal types and materials to fit your industrial water and fluid needs.

More Support to Promote Confidence

FILIPUSI FLPS single stage, double suction centrifugal pumps come in so many models and materials that you can precisely configure your pump for your system. Simplify selection with our Intellitronic X selection tool. Easily configure hydraulics, pump materials, motors and seals based on your application. We'll assemble your pump and get it on its way.


Since the proper selection and configuration of your pump is critical to long-term efficiency and dependability, you also have easy access to our pump application engineers and vast network of knowledgeable distributors. They will ensure your pump is optimized for your application and designed to deliver the long-lasting, reliable service that you expect.

Technical Specifications:


- Number of models: 142
- Maximum flow: 10,800 m³/hr [47,551 gpm]
- Maximum head: 221 m [725 ft.]
- Flow discharge: up to 800 mm [32"]
- Nominal pressure: 12 to 31 bar [175 to 450 psi]
- Flange rating: Standard PN16 and PN25 design
- Temperature range: -20°C to 121°C [-4°F to 250°F]
- Available in 50 Hz and 60 Hz
- Standard mechanical seals: rubber bellow or balanced metal pusher
- Optional seals: packing, cartridge or custom solutions
- Eight (8) standard alignment jacking screws for easier motor alignment (NEMA 215 motor frame size and larger)
- Three (3) vibration ports 1/4-28 UNF
- Two (2) temperature ports 1/4 MNPT

Performance and Curve & Dimensions and Weight


CW150-100

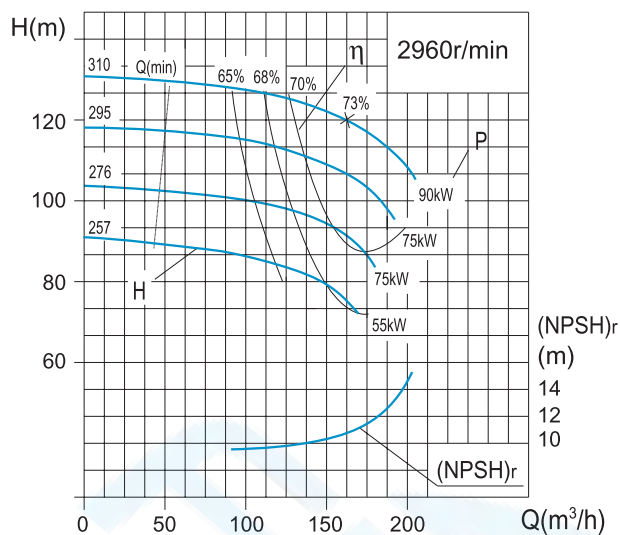


CW150-100A

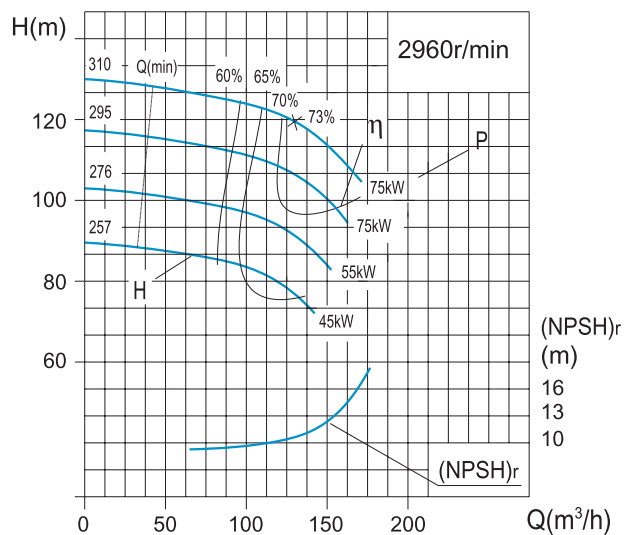


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft power	电机功率 Motor power			
CW150-100	310	96	26.7	127	2960	51.0	90	65	10.2	168
		160	44.4	120		71.6		73		
		202	56.1	108		82.5		72		
	295	91	25.3	114	2960	45.1	75	63	10.0	167
		152	42.2	108		63.2		71		
		192	53.3	97		72.8		70		
	276	85	23.7	100	2960	38.3	75	61	9.8	165
		142	39.6	95		53.5		69		
		180	49.9	86		61.6		68		
	257	80	22.1	87	2960	32.1	55	59	9.6	163
		131	36.9	83		44.1		67		
		169	46.6	74		51.9		66		
CW150-100A	310	81	22.6	123	2960	46.6	75	59	10.2	166
		131	37.7	116		56.8		73		
		171	47.6	106		69.3		71		
	295	77	21.0	111	2960	41.3	75	57	9.9	164
		124	35.1	105		50.0		71		
		163	44.3	96		61.2		69		
	276	72	19.5	97	2960	35.2	55	55	9.6	163
		117	32.4	92		42.3		69		
		153	40.9	84		51.8		67		
	257	68	19.5	85	2960	29.7	45	53	9.4	162
		109	32.4	80		35.4		67		
		142	40.9	73		43.3		65		

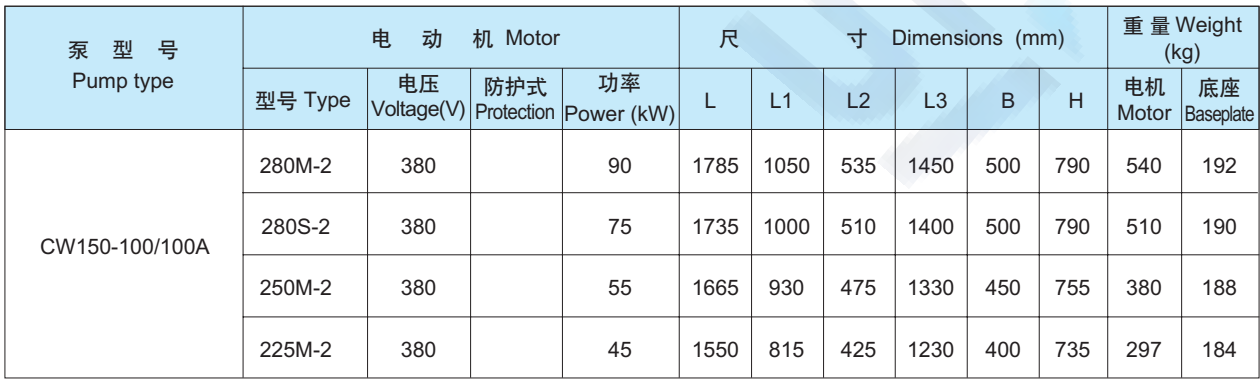


CW150-100

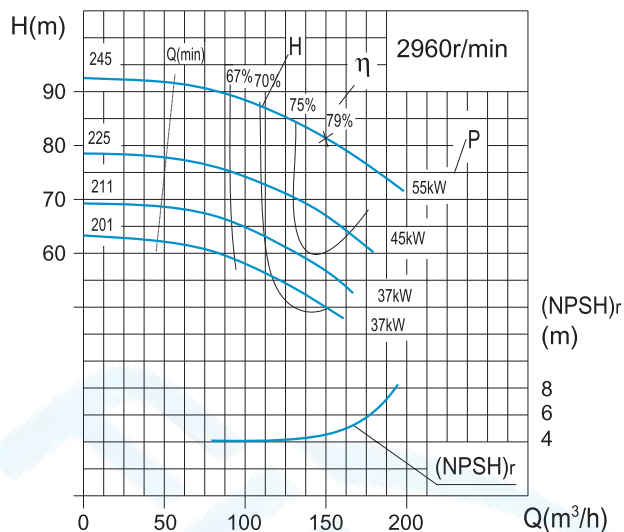

CW150-100A

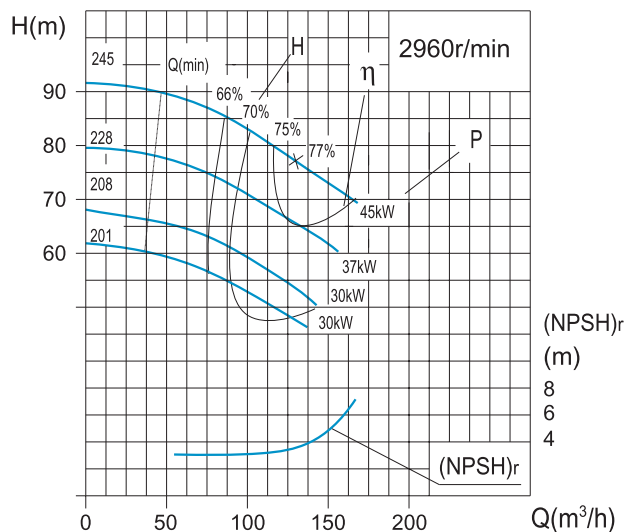


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft power	电机功率 Motor power			
CW150-100	245	96	26.7	91	2960	36.0	55	66	4.0	158
		160	44.4	79		43.6		79		
		198	55.0	71		50.4		76		
	225	88	24.5	75	2960	28.2	45	64	3.8	154
		147	40.9	66		34.6		77		
		182	50.6	60		40.0		74		
	211	83	22.9	66	2960	23.8	37	62	3.7	151
		138	38.2	58		29.0		75		
		170	47.3	52		33.6		72		
	201	79	21.9	60	2960	21.3	37	60	3.5	150
		131	36.4	53		25.8		73		
		162	45.1	47		29.9		70		
CW150-100A	245	81	22.6	88	2960	32.9	45	59	3.6	145
		136	37.7	76		36.5		77		
		168	46.7	70		42.3		75		
	228	76	21.5	76	2960	27.4	37	57	3.5	142
		126	35.8	66		30.1		75		
		156	44.3	60		35.0		73		
	208	69	19.9	64	2960	21.7	30	55	3.3	140
		115	33.2	55		23.6		73		
		143	41.1	50		27.4		71		
	201	67	18.6	59	2960	20.2	30	53	3.2	138
		111	30.9	51		21.8		71		
		138	38.3	47		25.4		69		

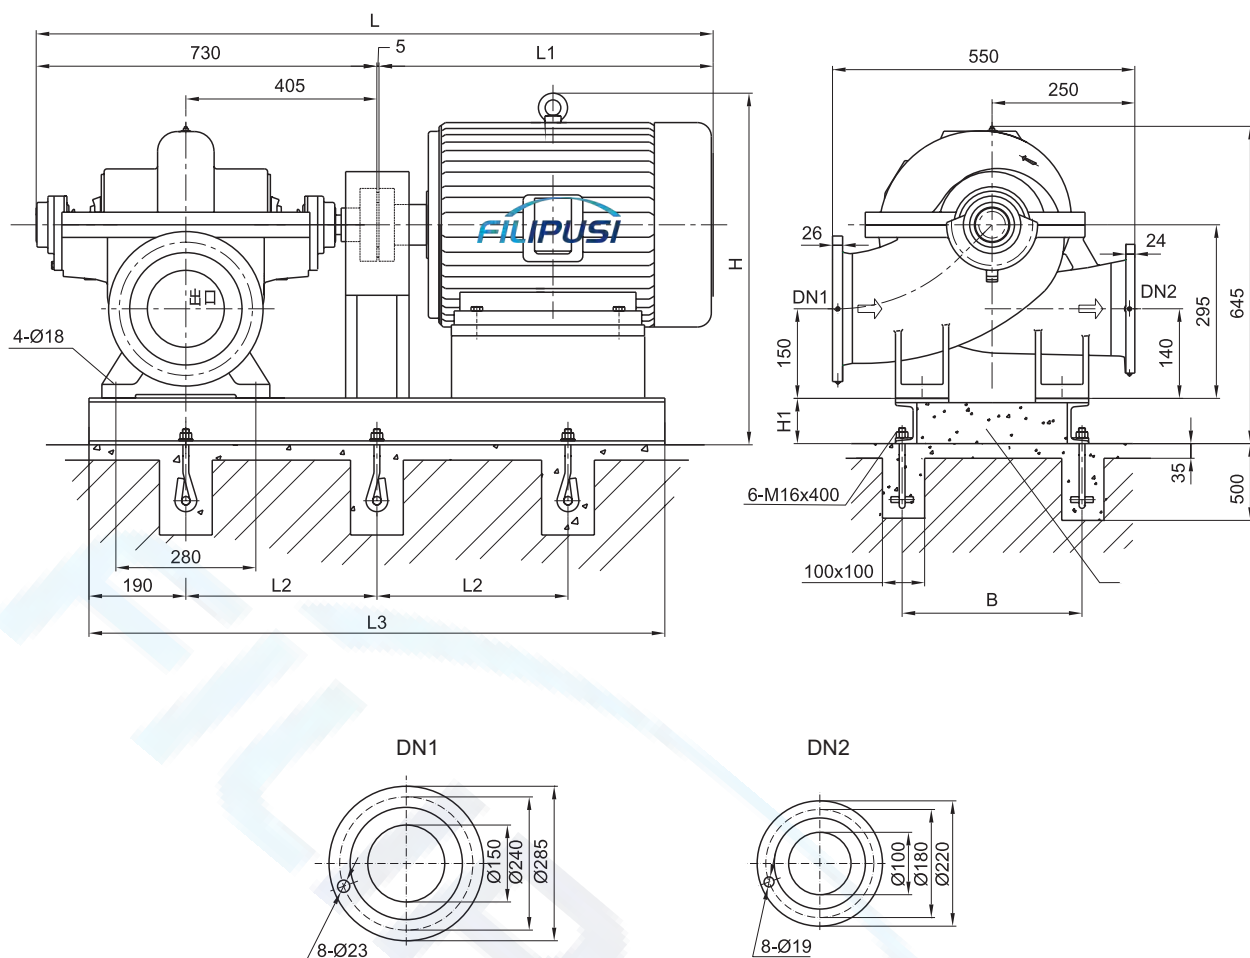


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)							重 量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	H1	电机 Motor	底座 Baseplate
CW150-100/100A	250M-2	380		55	1665	930	475	1330	450	740	120	380	158
	225M-2	380		45	1550	815	425	1230	400	720	120	297	156
	200L ₂ -2	380		37	1510	775	410	1200	350	670	100	239	154
	200L ₁ -2	380		30	1510	775	410	1200	350	670	100	220	154

CW150-100

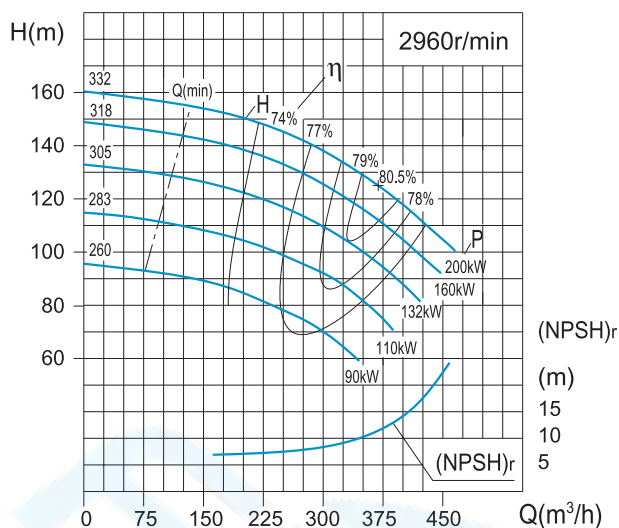


CW150-100A

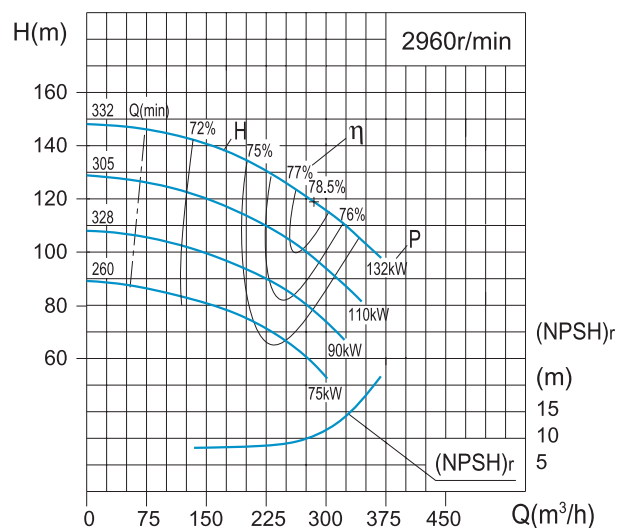


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	重量 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW150-100	332	221	61.5	146	2960	118.2	200	74.5	11.0	234
		369	102.5	125		156.0		80.5		
		443	123.0	108		169.1		77		
	318	213	59.2	135	2960	105.8	160	74	10.9	233
		356	98.9	115		139.4		80		
		427	118.6	98		149.9		76		
	305	205	57.0	120	2960	91.2	132	73.5	10.8	232
		342	95.0	102		120.3		79		
		410	114.0	85		125.8		75.5		
	283	190	52.7	104	2960	74.1	110	72.5	10.7	231
		316	87.8	90		99.3		78.0		
		379	105.3	74		102.6		75		
CW150-100A	332	166	46.2	88	2960	55.7	90	71.5	10.6	230
		277	76.9	74		72.5		77.0		
		332	92.3	64		78.8		74		
	305	171	47.5	137	2960	89.9	132	71	10.5	233
		285	79.2	120		118.6		78.5		
		342	95.0	105		130.4		75		
	283	159	44.2	118	2960	73.0	110	70	10.3	232
		265	73.6	103		95.9		77.5		
		318	88.3	89		104.2		74		
	260	150	41.7	99	2960	58.6	90	69	10.1	231
		250	69.4	84		74.8		76.5		
		300	83.3	74		82.8		73		
CW150-100A	260	140	39.0	81	2960	45.5	75	68	10.0	230
		234	65.0	69		58.2		75.5		
		281	78.0	59		62.7		72		


CW150-100

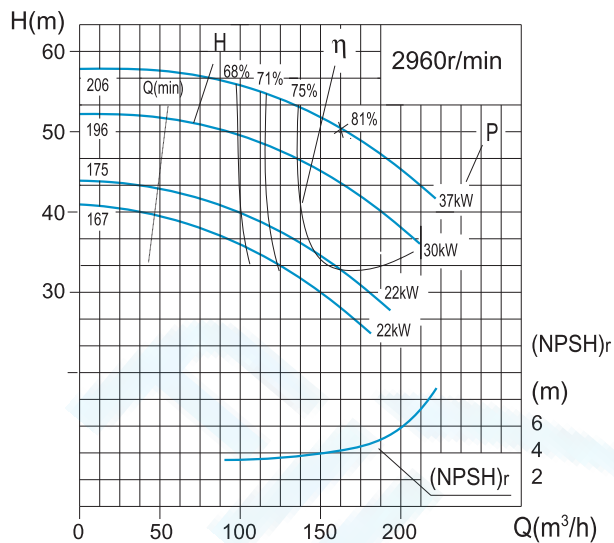

CW150-100A

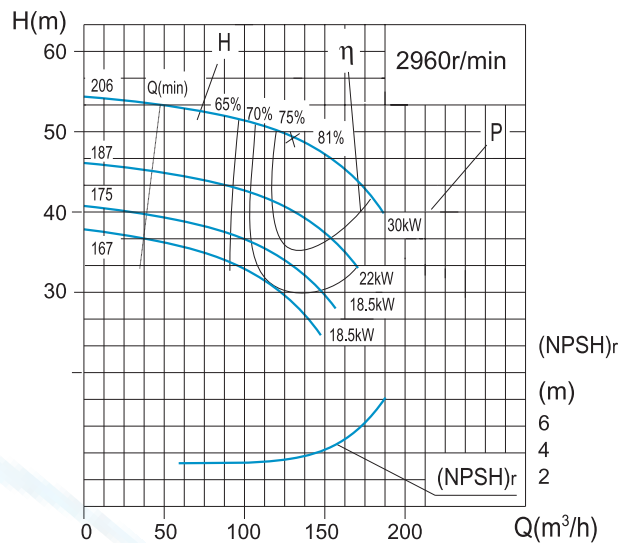


泵 型号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft power	电机功率 Motor power			
CW150-100	206	96	26.7	53	2960	20.3	37	68	4.0	147
		160	44.4	51		27.4		81		
		220	61.1	41		31.5		78		
	196	91	25.3	48	2960	18.0	30	66	3.9	146
		152	42.2	45		23.8		79		
		209	58.1	36		27.2		76		
	175	82	22.7	38	2960	13.7	22	62	3.6	145
		136	37.8	36		18.0		75		
		187	51.9	29		20.6		72		
	167	78	21.6	35	2960	12.2	22	60	3.5	144
		130	36.0	33		16.0		73		
		178	49.5	26		18.3		70		
CW150-100A	206	81	22.6	51	2960	18.5	30	61	3.6	142
		136	37.7	49		22.5		81		
		187	51.9	40		26.5		77		
	187	74	21.5	42	2960	14.4	22	59	3.5	140
		124	35.8	41		17.4		79		
		170	49.3	33		20.5		75		
	175	69	19.9	37	2960	12.2	18.5	57	3.3	139
		115	33.2	36		14.6		77		
		159	45.6	29		17.1		73		
	167	66	18.3	34	2960	10.9	18.5	55	3.1	138
		110	30.5	32		12.9		75		
		151	42.0	26		15.2		71		

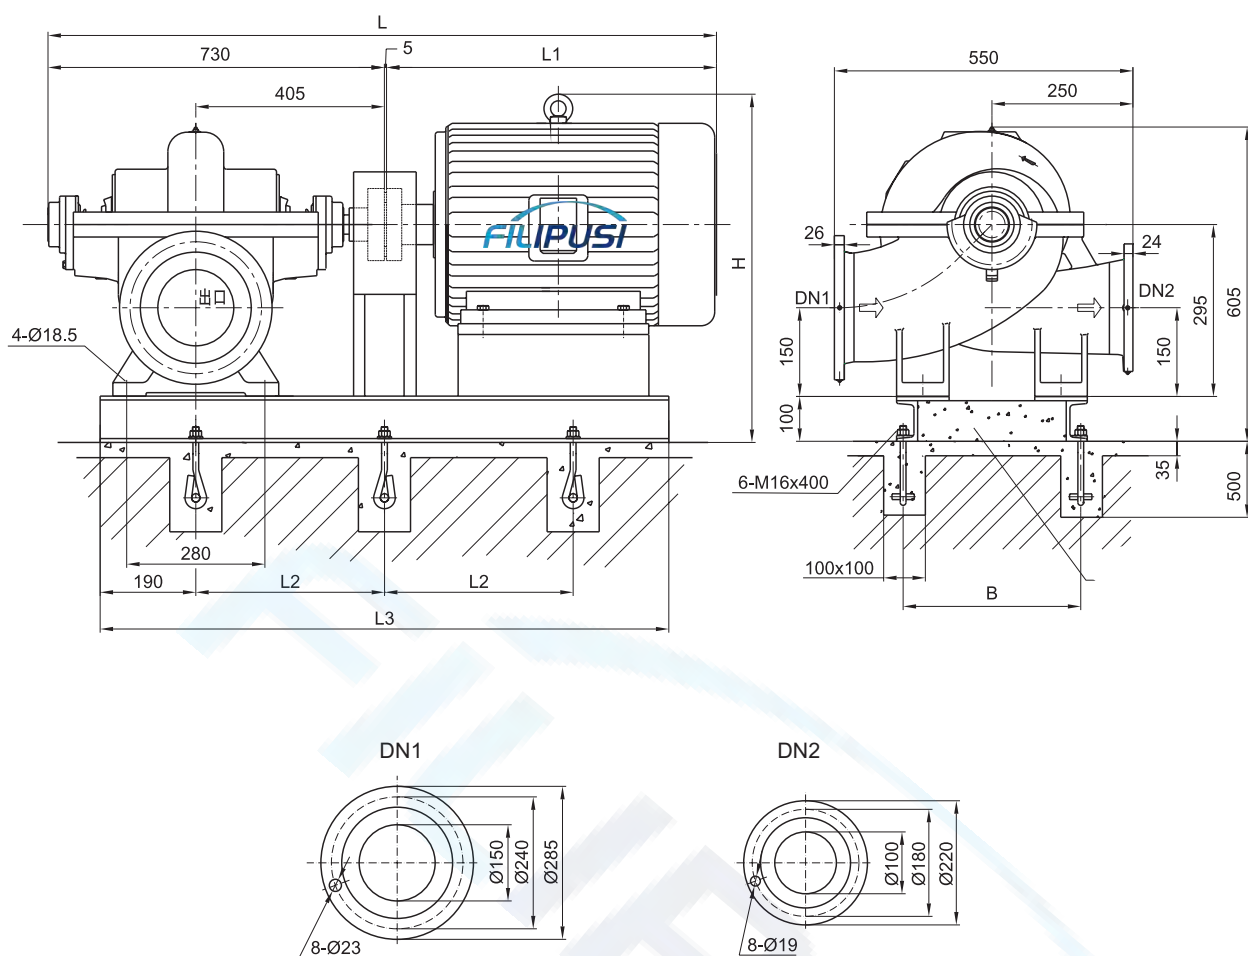


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)						重 量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	电机 Motor	底座 Baseplate
CW150-100/100A	200L ₂ -2	380		37	1510	775	410	1200	350	670	239	126
	200L-2	380		30	1510	775	410	1200	350	670	220	126
	180M-2	380		22	1405	670	390	1160	290	645	169	125
	160L-2	380		18.5	1385	650	390	1160	290	620	134	125


CW150-100

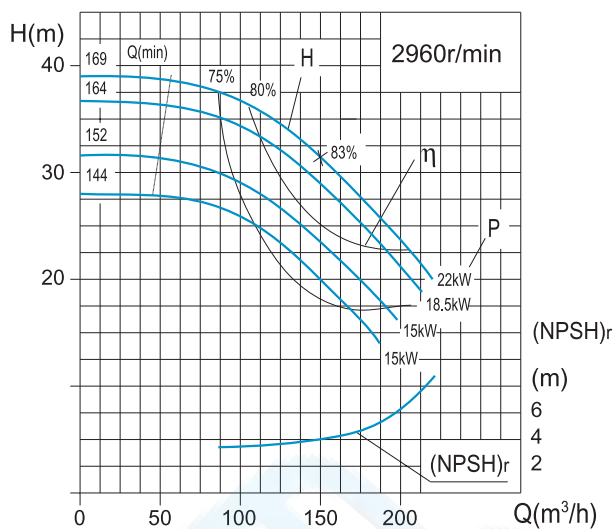

CW150-100A

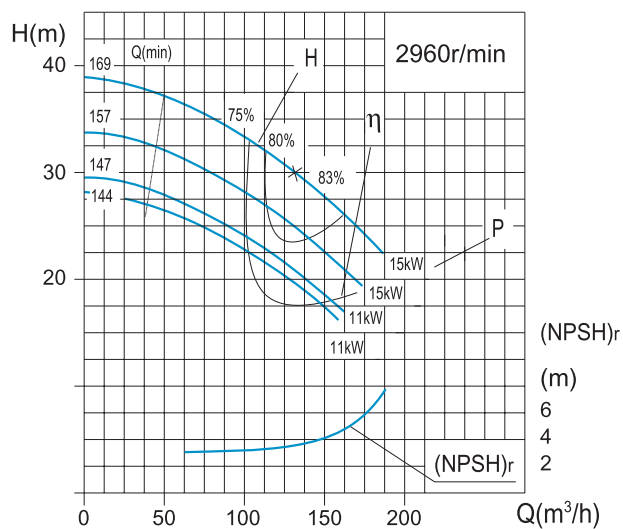


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency %	(NPSH) _r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft power	电机功率 Motor power			
CW150-100	169	96	26.7	37	2960	13.3	22	73	4.0	143
		160	44.4	30		15.7		83		
		220	61.1	20		15.2		79		
	164	93	25.9	34	2960	12.1	18.5	71	4.0	142
		155	43.1	27		14.3		81		
		213	59.3	18		13.6		77		
	152	86	24.0	29	2960	10.0	15	69	3.8	140
		144	40.0	24		11.7		79		
		198	55.0	15		11.1		75		
	144	82	22.7	26	2960	8.7	15	67	3.6	138
		136	37.8	21		10.1		77		
		187	51.9	14		9.6		73		
CW150-100A	169	81	22.6	36	2960	12.1	15	66	3.6	141
		136	37.7	29		12.9		83		
		187	51.9	20		12.7		78		
	157	76	21.5	31	2960	10.0	15	64	3.5	140
		126	35.8	25		10.7		81		
		174	49.3	17		10.5		76		
	147	71	20.1	27	2960	8.5	11	62	3.3	139
		118	33.6	22		8.9		79		
		162	46.2	15		8.8		74		
	144	69	19.2	26	2960	8.2	11	60	3.2	138
		115	32.1	21		8.6		77		
		159	44.1	14		8.5		72		

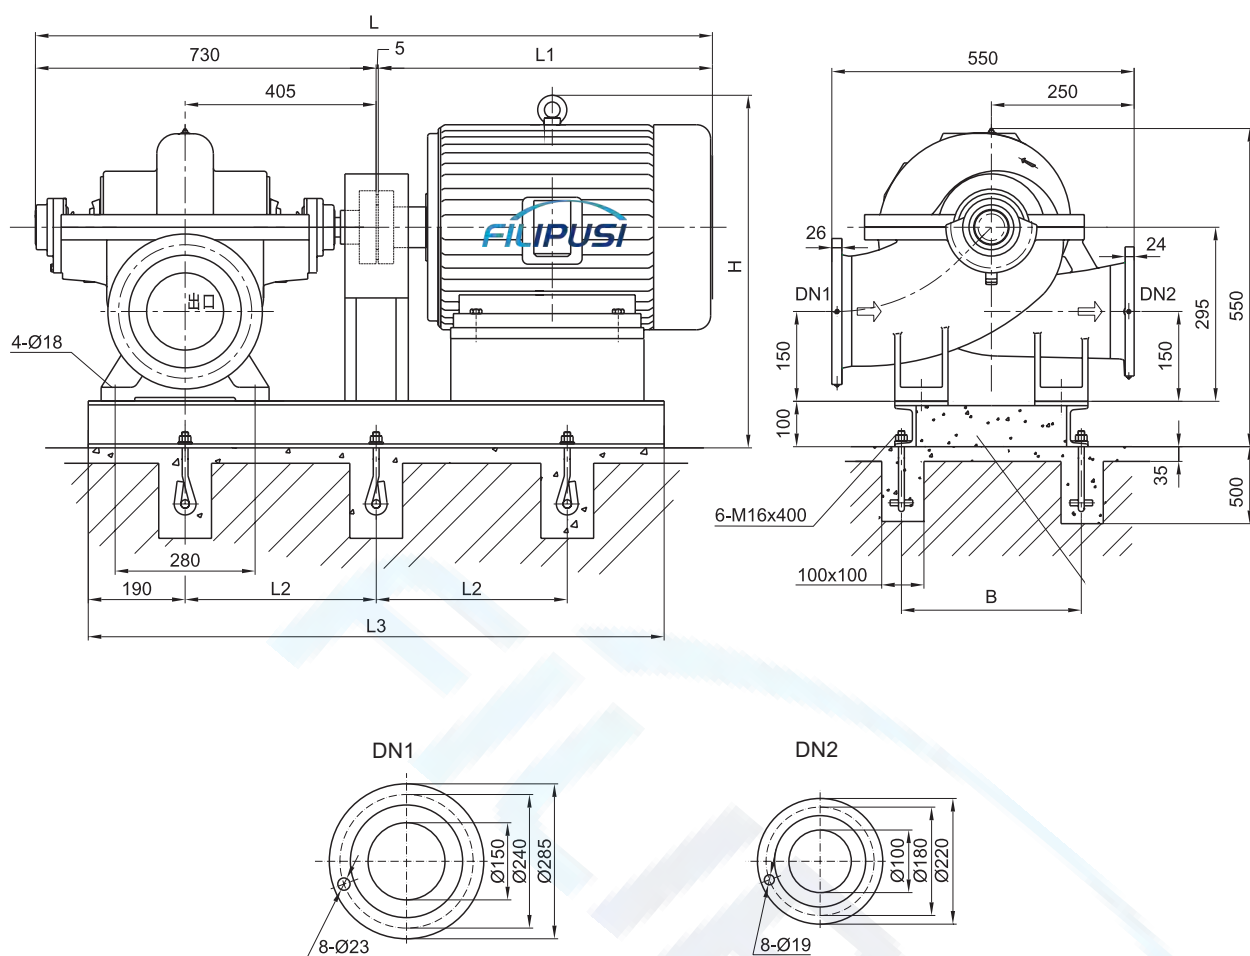


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)						重 量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	电机 Motor	底座 Baseplate
CW150-100/100A	180M-2	380		22	1405	670	390	1120	290	645	169	105
	160L-2	380		18.5	1385	650	390	1120	290	620	134	106
	160M ₂ -2	380		15	1340	605	390	1080	290	620	117	104
	160M-2	380		11	1340	605	390	1080	290	620	107	104


CW200-125

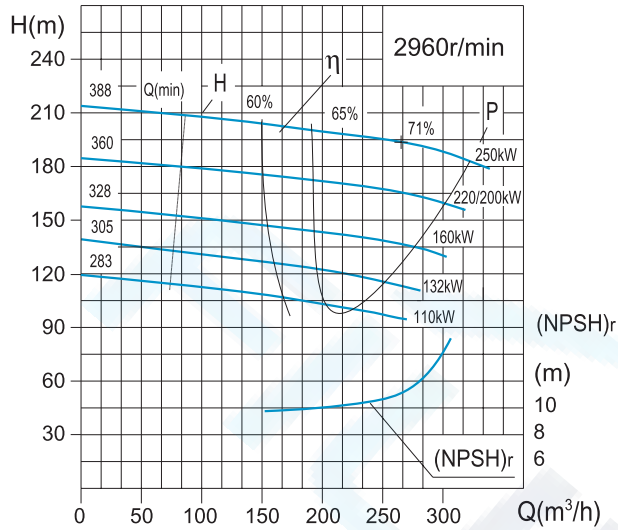

CW200-125A

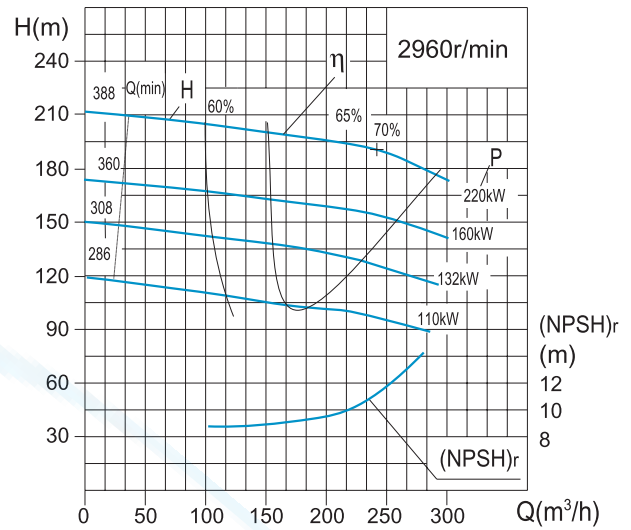


泵 型 号 Pump type	规格 Standards	流量流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	重量 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW200-125	388	168	46.7	200	2960	145.2	250	63	10.5	369
		280	77.8	193		207.2		71		
		336	93.3	180		245.7		67		
	360	155	43.1	176	2960	121.7	* 220/200	61	10.3	365
		258	71.7	165		167.9		69		
		310	86.1	155		195.2		67		
	328	142	39.4	146	2960	95.7	160	59	10.1	361
		236	65.6	138		132.3		67		
		284	78.9	132		157.0		65		
	305	132	36.7	131	2960	81.2	132	58	9.9	359
		220	61.1	120		108.9		66		
		250	69.4	112		119.1		64		
	283	124	34.4	113	2960	66.9	110	57	9.7	357
		207	57.5	103		89.3		65		
		245	68.1	101		106.9		63		
CW200-125A	388	143	39.7	196	2960	123.1	220	62	10.3	368
		238	66.1	190		175.9		70		
		285	79.2	176		206.9		66		
	360	124	34.4	172	2960	96.8	160	60	10.0	363
		208	57.8	160		133.2		68		
		250	69.4	151		158.1		65		
	328	156	43.3	136	2960	99.6	132	58	9.9	359
		196	54.4	133		107.5		66		
		236	65.6	127		129.5		63		
	286	114	31.7	109	2960	60.4	110	56	9.8	356
		190	52.8	102		83.7		63		
		224	62.2	98		98.0		61		

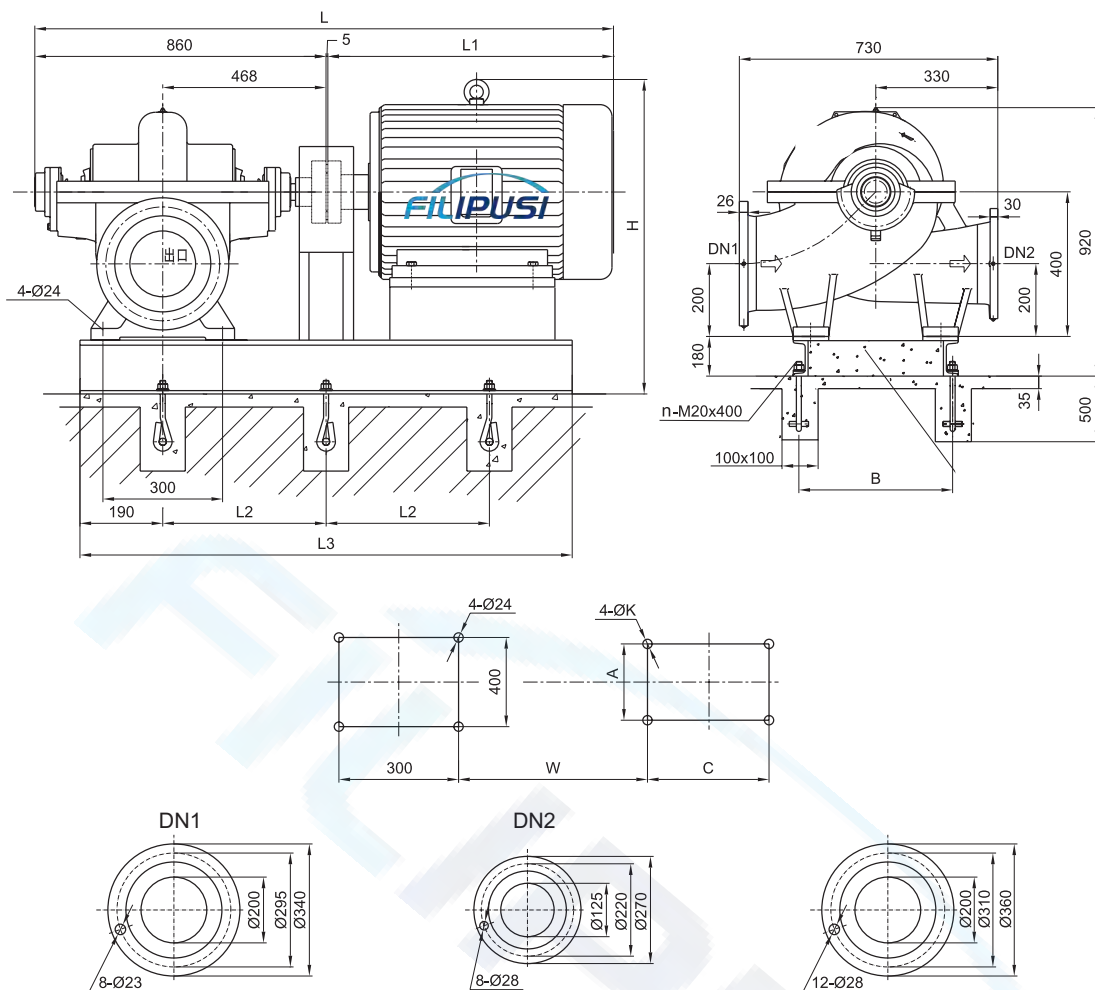


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)										重量 Weight (kg)		地脚数量
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	W	A	C	K	电机 Motor	底座 Baseplate	n (个)
CW200-125/125A	315M-2	380		200~250	2485	1620	610	1580	520	1193	679	508	457	28	980	260	6
	315S-2	380		160	2415	1550	570	1530	520	1193	679	508	406	28	870	253	6
	280M-2	380		132/110	2005	1140	550	1500	500	1085	653	457	419	24	750	250	6
	355-2	6000		200~250	2735	1870	650	2325	720	1400	808	630	900	28	2050	280	8
	450-2	10000		200~250	2865	2000	730	2565	920	1500	893	800	1120	35	2950	295	8
	355M-2	380		250/220	2365	1500	650	1735	645	1235	717	610	560	28	1690	268	6
	315L1-2	380		160	2055	1190	640	1655	520	1110	679	508	508	28	1080	261	6
	315M-2	380		132	2055	1190	610	1580	520	1110	679	508	457	28	970	256	6
	315S-2	380		110	2025	1160	570	1530	520	1110	679	508	406	28	920	251	6

CW200-125

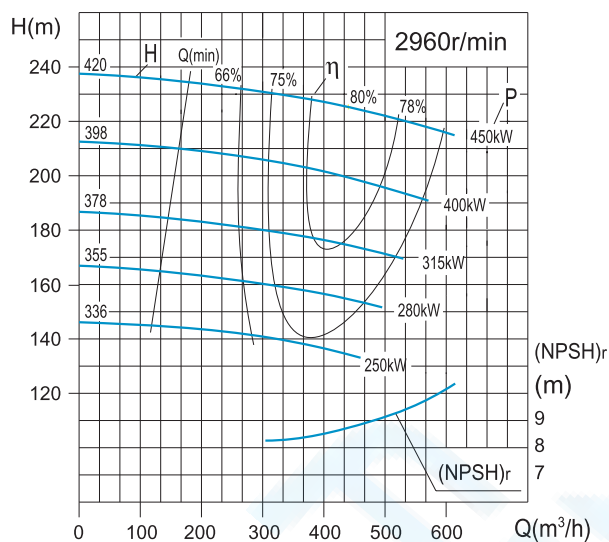


CW200-125A

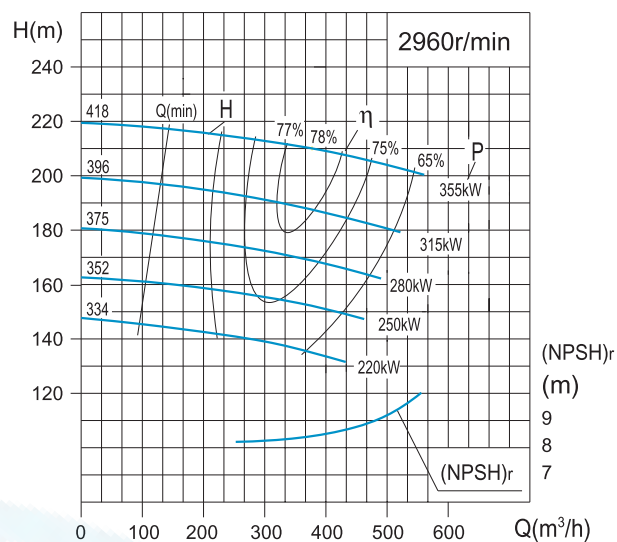


泵型号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	重量 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW200-125/	420	264	73.3	232	2960	252.7	450	66	8.9	395
		440	122.2	225		337.0		80		
		528	146.7	220		421.8		75		
	398	250	69.4	208	2960	217.9	400	65	8.7	390
		416	115.6	201		288.4		79		
		499	138.6	196		360.8		74		
	378	234	65.0	182	2960	181.5	315	64	8.5	385
		390	108.3	177		240.7		78		
		468	130.0	173		301.8		73		
	355	221	61.4	163	2960	130.5	280	75	8.3	380
		368	102.2	157		207.5		76		
		442	122.8	154		254.2		73		
	336	207	57.5	143	2960	127.6	250	63	8.1	375
		345	95.8	138		168.8		77		
		414	115.0	135		211.8		72		
CW200-125A	418	225	62.5	216	2960	206.8	355	64	8.7	390
		375	104.2	210		274.9		78		
		450	125.0	206		345.8		73		
	396	214	59.4	195	2960	180.8	315	63	8.5	385
		356	98.9	189		238.3		77		
		427	118.6	185		299.6		72		
	375	203	56.4	176	2960	156.8	280	62	8.3	380
		338	93.9	171		206.6		76		
		406	112.8	168		261.1		71		
	352	193	53.6	159	2960	136.9	250	61	8.1	375
		321	89.2	154		179.4		75		
		385	106.9	151		225.9		70		
	334	183	50.8	143	2960	118.7	220	60	7.9	370
		305	84.7	139		155.9		74		
		366	101.7	136		196.8		69		


CW200-150

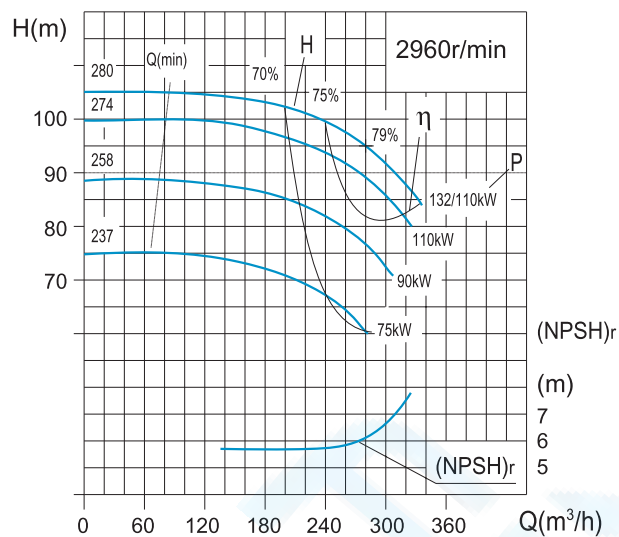

CW200-150A

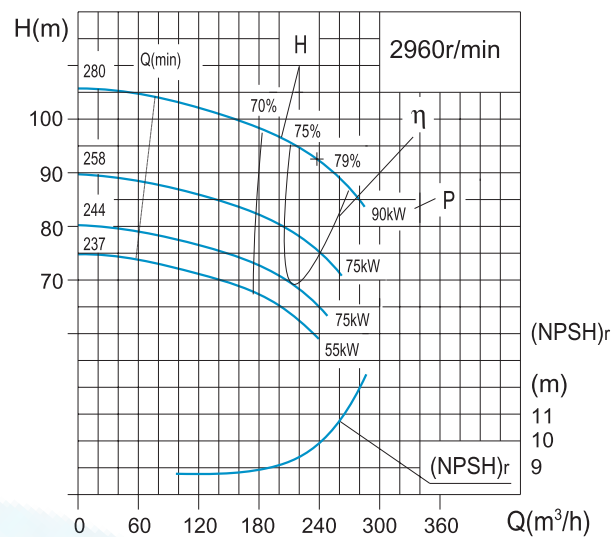


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kw)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor Power			
CW200-150	280	168	46.7	105	2960	80.1	* 132/110	60	5.9	240
		280	77.8	95		91.7		79		
		326	93.3	85		101.5		74		
	274	163	45.3	98	2960	75.0	110	58	5.7	239
		272	75.4	90		86.4		77		
		326	90.5	80		98.1		72		
	258	154	42.7	87	2960	65.2	90	56	5.5	237
		256	71.2	80		74.5		75		
		307	85.4	71		84.7		70		
	237	141	39.2	74	2960	52.3	75	54	5.2	235
		235	65.3	67		59.2		73		
		282	78.4	60		67.5		68		
CW200-150A	280	143	39.6	102	2960	73.1	90	54	5.8	238
		238	66.0	92		75.3		79		
		285	79.2	83		87.8		73		
	258	131	37.6	86	2960	59.1	75	52	5.6	236
		219	62.7	78		60.2		77		
		262	75.2	70		70.3		71		
	244	124	33.7	77	2960	52.0	75	50	5.4	234
		207	56.1	70		52.2		75		
		248	67.3	63		61.2		69		
	237	120	33.3	72	2960	48.7	55	48	5.2	233
		200	55.4	64		47.6		73		
		235	66.5	57		54.4		67		

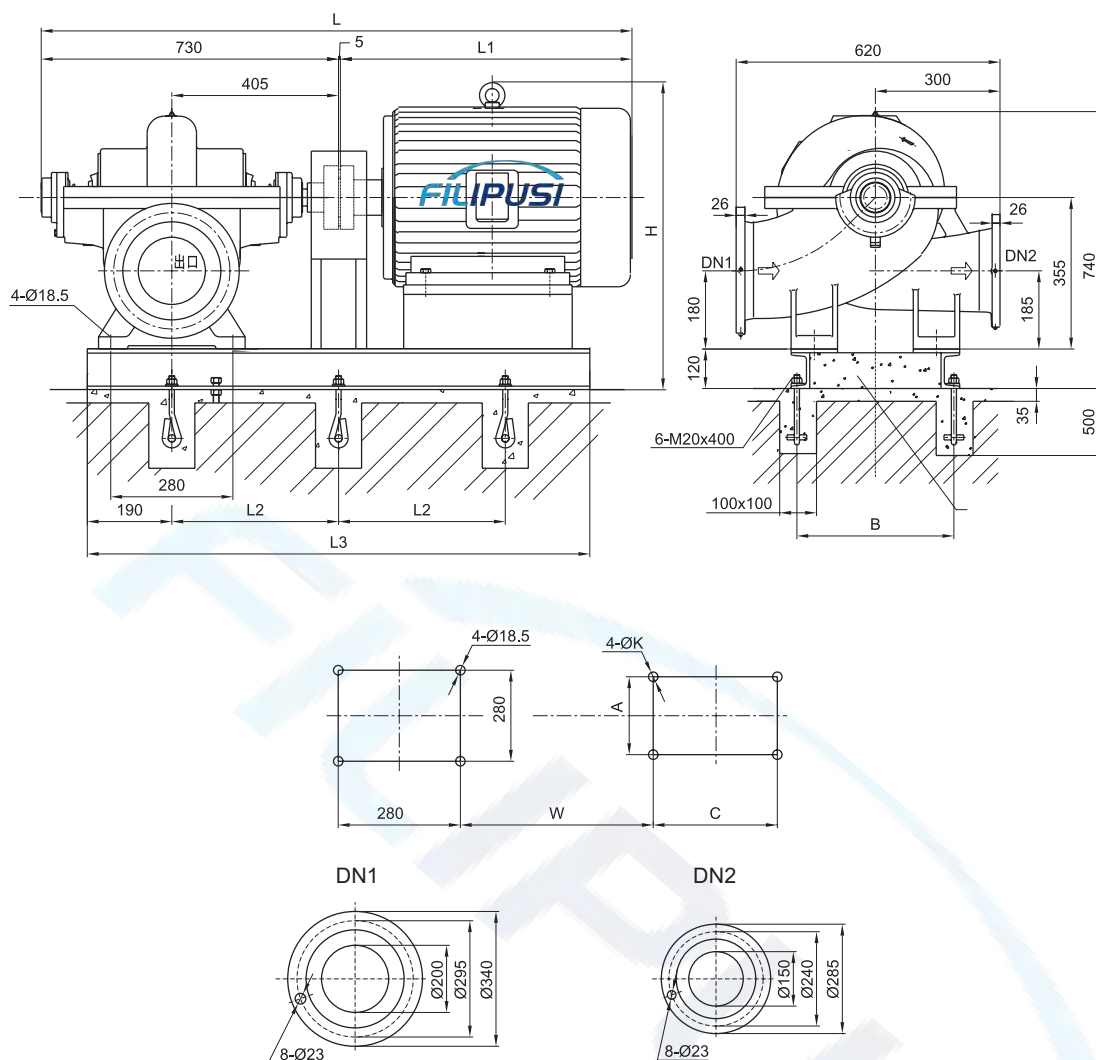


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)										重量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	W	A	C	K	电机 Motor	底座 Baseplate
CW200-150/150A	280M-2	380		132/110	1875	1140	535	1450	500	980	600	457	419	24	820	210
	315M-2	380		132	2075	1340	580	1540	600	1040	626	508	457	28	970	211
	315S-2	380		110	2005	1270	580	1540	600	1040	626	508	406	28	920	211
	280M-2	380		90	1785	1050	535	1450	500	835	600	457	419	24	540	209
	280S-2	380		75	1735	1000	510	1400	500	835	600	457	368	24	510	207
	250M-2	380		55	1665	930	475	1330	450	805	578	406	349	24	380	176


CW200-125

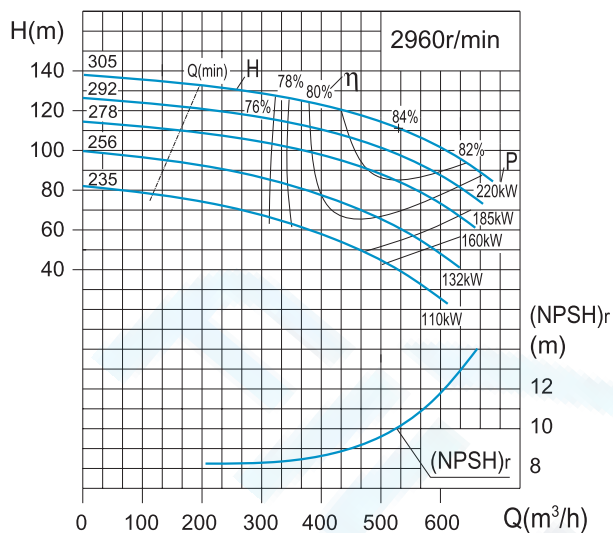

CW200-125A

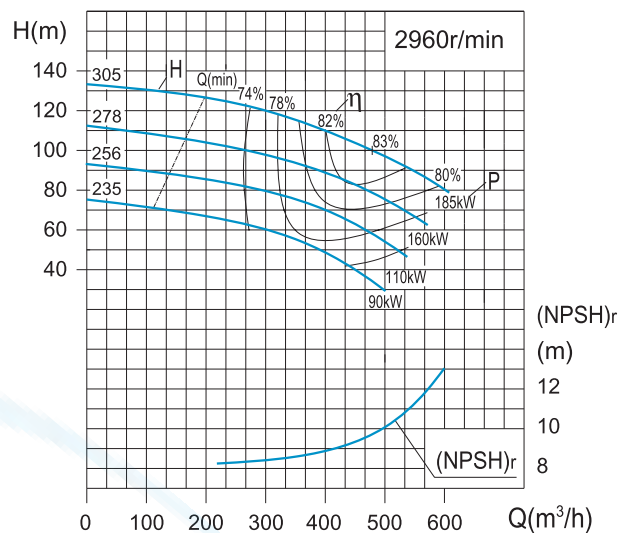


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	重量 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW200-125	305	318	88.3	125	2960	144.3	220	75	9.6	278
		530	147.2	111		190.7		84		
		636	176.7	95		201.9		81.5		
	292	305	84.7	115	2960	129.1	185	74	9.6	277
		508	141.1	100		166.7		83		
		609	169.2	87		178.1		81		
	278	291	80.8	105	2960	112.4	160	74	9.4	276
		485	134.7	88		141.7		82		
		582	161.7	78		153.6		80.5		
	256	263	73.2	89	2960	87.5	132	73	9.2	275
		439	121.9	72		106.9		80.5		
		527	146.3	63		115.9		78		
CW200-125A	305	235	65.3	73	2960	64.9	110	72	9.0	273
		392	108.9	57		77.0		79		
		470	130.7	50		83.2		77		
	278	288	80.0	121	2960	126.5	185	75	9.7	276
		480	133.3	100		157.5		83		
		576	160.0	85		166.7		80		
	256	263	73.2	100	2960	96.9	160	74	9.4	275
		439	121.9	84		121.7		82		
		527	146.3	70		127.1		79		
	235	241	66.8	83	2960	74.5	110	73	9.2	273
		401	111.4	70		95.6		80		
		481	133.7	57		98.3		76		
CW200-125A	235	214	59.3	66	2960	53.3	90	72	9.0	272
		356	98.9	55		68.4		78		
		427	118.7	44		69.2		74		

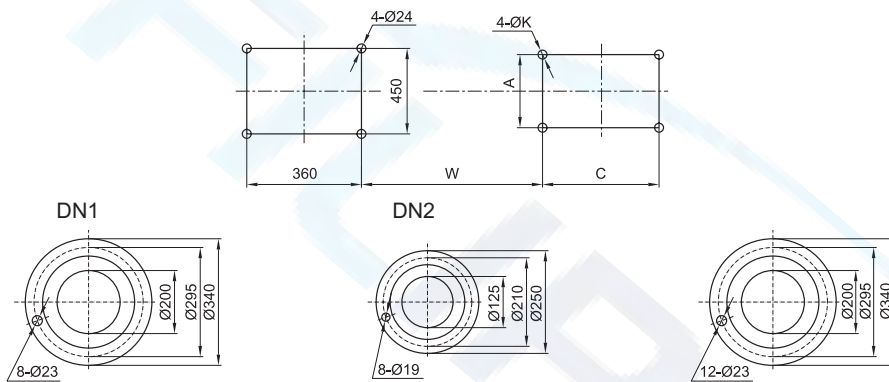


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)												重量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	W	A	C	K	H1	n	电机 Motor	底座 Baseplate
CW200-125/125A	315M-2	380		220/185	2223	1240	600	1686	640	1153	695	508	457	28	140	6	980	358
	315S-2	380		160	2113	1130	600	1635	640	1153	695	508	406	28	140	6	870	350
	280M-2	380		132/110	1923	940	560	1614	520	1045	669	457	419	24	120	6	750	318
	355M-2	380		220	2503	1520	720	1917	700	1235	733	610	630	28	160	6	1690	388
	315L-2	380		200/160	2268	1285	640	1757	580	1090	695	508	508	28	140	6	1080	368
	315M-2	380		132	2223	1240	600	1696	580	1090	695	508	457	28	140	6	970	358
	315S-2	380		110	2173	1190	600	1640	580	1090	695	508	406	28	140	6	920	350
	280M-2	380		90	2033	1050	560	1614	520	900	669	457	419	24	120	6	540	318
	355-2	6k		220/185	2853	1870	640	2438	760	1375	824	630	900	28	160	8	1870	518
	450-2	10k		220/185	2983	2000	720	2673	940	1430	909	800	1120	35	280	8	2935	588


CW200-150

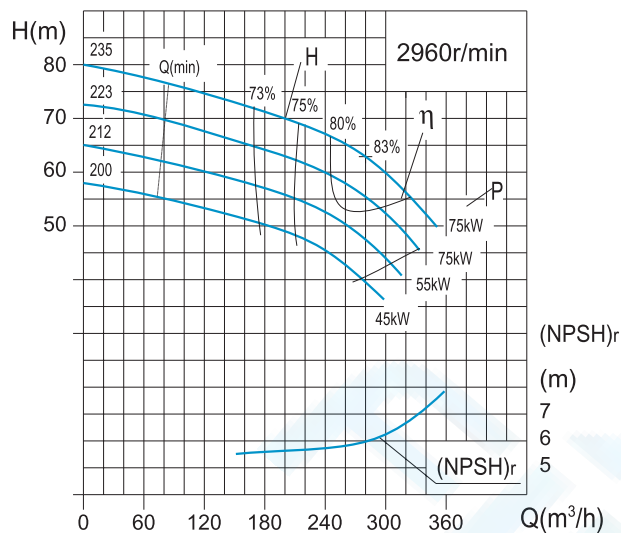

CW200-150A

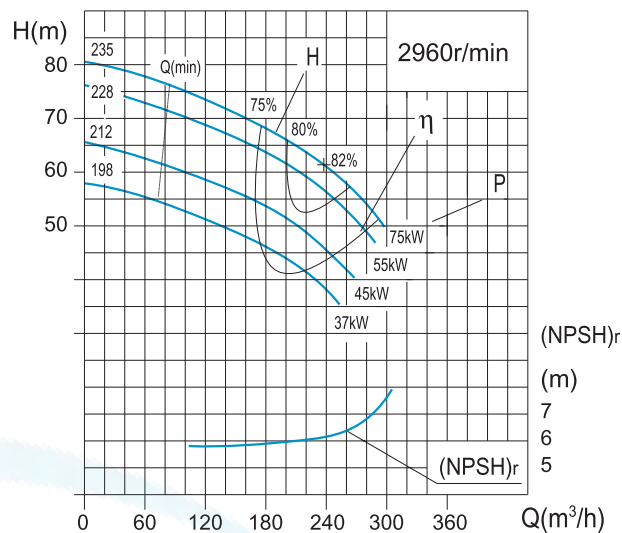


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kw)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor Power			
CW200-150	235	168	46.7	73	2960	45.8	75	73	5.9	187
		280	77.8	64		58.8		83		
		351	97.5	51		63.3		77		
	223	160	44.3	65	2960	40.0	75	71	5.7	186
		266	73.9	57		51.2		81		
		333	92.6	45		55.8		74		
	212	151	42.0	59	2960	35.0	55	69	5.5	185
		252	70.0	51		44.6		79		
		316	87.8	41		48.7		72		
	200	143	39.7	52	2960	30.4	45	67	5.3	184
		238	66.1	46		38.6		77		
		298	82.9	36		42.2		70		
CW200-150A	235	143	39.6	71	2960	41.7	75	66	5.3	184
		238	66.0	62		48.3		83		
		298	82.7	50		53.2		76		
	228	138	36.8	66	2960	39.3	55	64	5.0	183
		230	61.4	58		45.2		81		
		289	76.9	47		49.8		74		
	212	128	35.2	57	2960	32.4	45	62	4.9	181
		214	58.7	50		37.0		79		
		268	73.6	40		40.9		72		
	198	121	33.7	51	2960	28.2	37	60	4.7	179
		202	56.1	44		31.4		77		
		240	70.3	32		30.2		70		

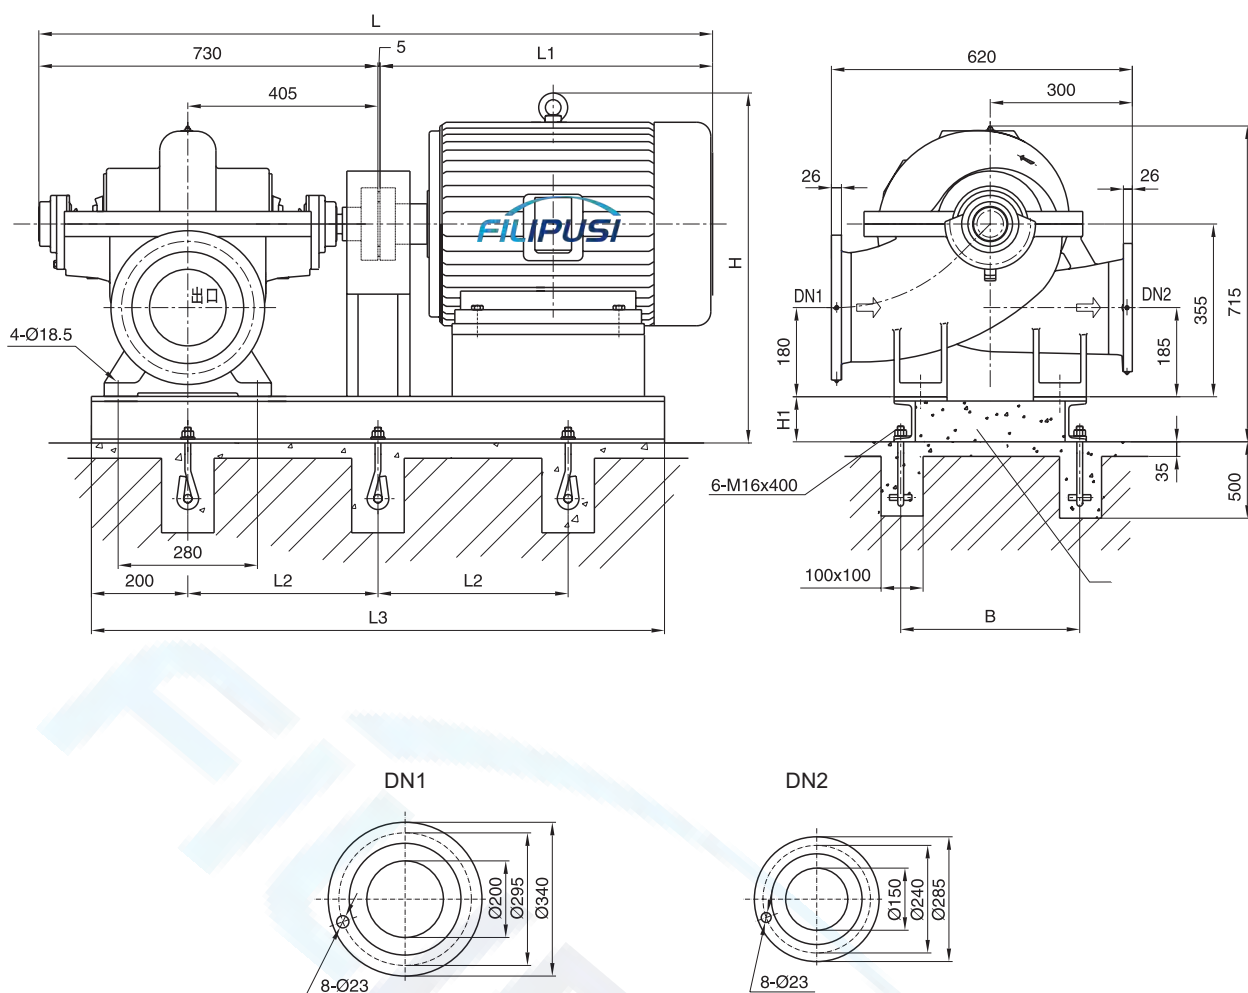


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)							重量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	H1	电机 Motor	底座 Baseplate
CW200-150/150A	280S-2	380		75	1735	1000	510	1400	500	835	120	510	180
	250M-2	380		55	1665	930	475	1330	450	805	120	380	176
	225M-2	380		45	1550	815	425	1230	400	785	120	297	173
	200L ₂ -2	380		37	1510	775	410	1200	350	730	100	239	170


CW200-150

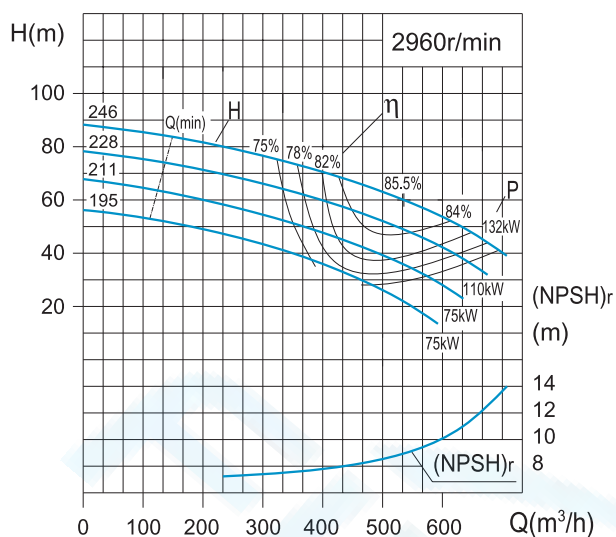

CW200-150A

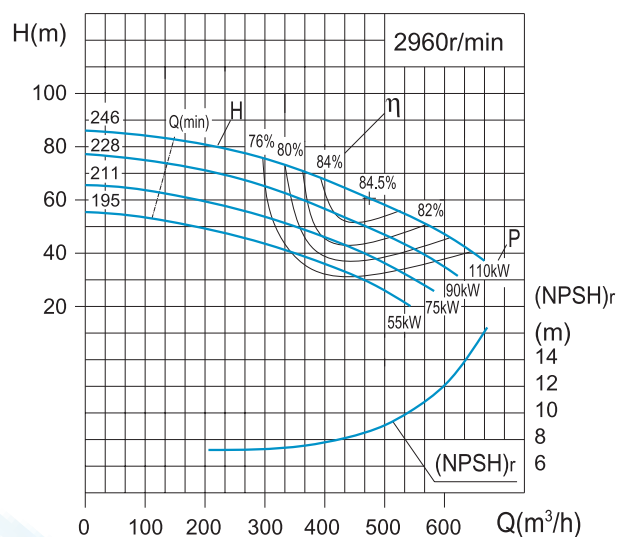


泵型号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kw)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor Power			
CW200-150	246	320	89.0	75.0	2960	86.1	132	76	8.8	250
		534	148.3	61.0		103.8		85.5		
		641	178.0	50.0		106.4		82		
	228	298	82.8	65.0	2960	70.4	110	75	8.7	249
		497	138.1	53.0		85.4		84		
		596	165.7	43.0		86.2		81		
	211	272	75.7	56.0	2960	56.9	75	73	8.6	248
		454	126.1	44.0		65.9		82.5		
		545	151.3	34.0		64.7		78		
	195	255	70.8	46.0	2960	45.0	75	71	8.5	246
		425	118.1	35.0		53.0		76.5		
		510	141.7	29.0		55.2		73		
CW200-150A	246	284	78.8	76.5	2960	77.8	110	76	8.6	250
		473	131.4	61.0		93.0		84.5		
		568	157.7	51.0		96.1		82		
	228	266	73.8	67.0	2960	65.5	90	74	8.5	249
		443	123.1	54.0		77.6		84		
		532	147.7	43.0		76.9		81		
	211	246	68.3	57.0	2960	52.3	75	73	8.4	248
		410	113.9	45.0		61.3		82		
		492	136.7	37.5		63.6		79		
	195	229	63.5	47.5	2960	41.6	55	71	8.3	246
		381	105.8	37.0		49.9		77		
		457	127.0	30.0		50.5		74		

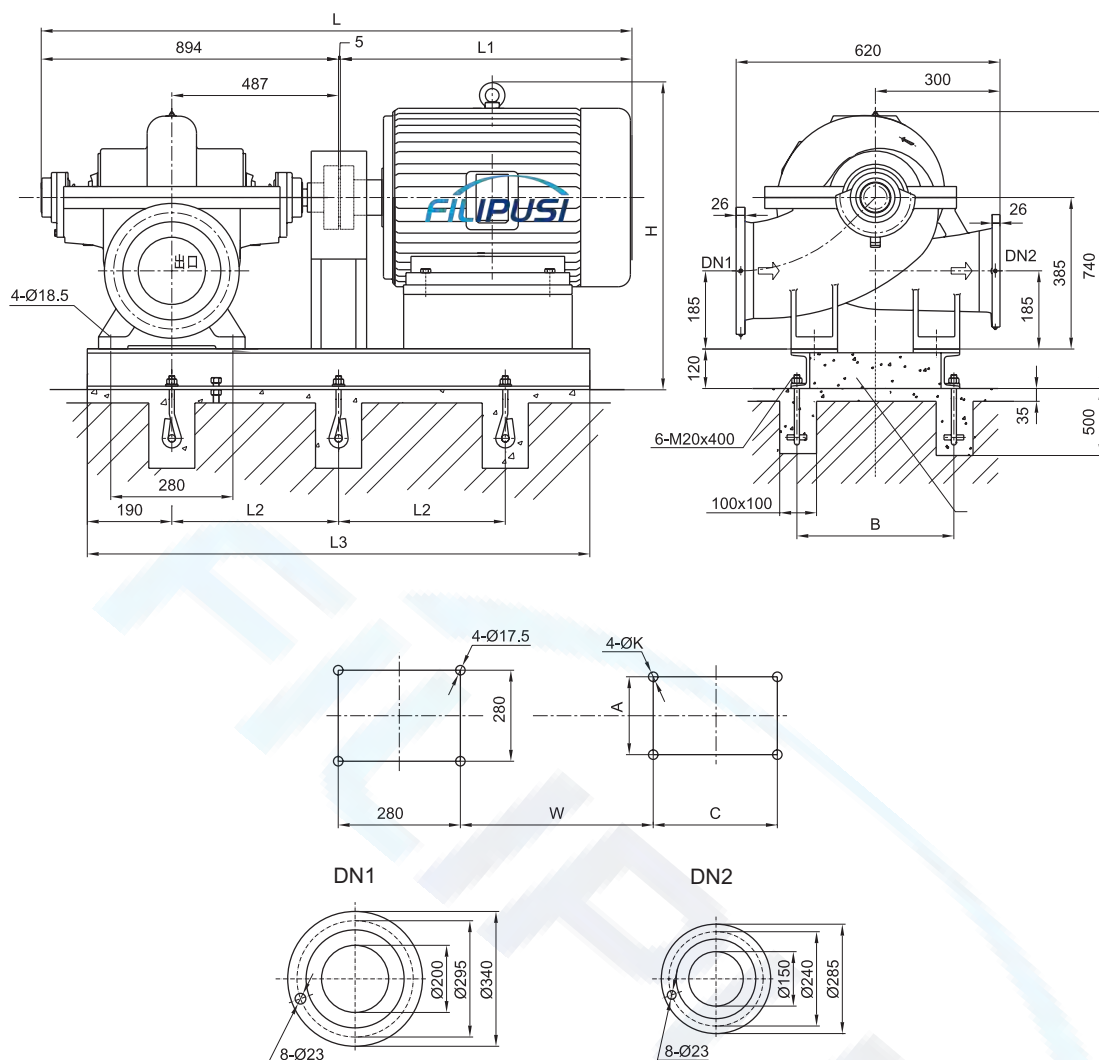


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)										重量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	W	A	C	K	电机 Motor	底座 Baseplate
CW200-150/150A	280M-2	380		132/110	1839	940	580	1523	520	1010	682	457	419	24	820	275
	315M-2	380		132	2139	1240	600	1605	580	1055	708	508	457	28	970	285
	315S-2	380		110	2089	1190	580	1550	580	1055	708	508	406	28	920	283
	280M-2	380		90	1949	1050	580	1523	520	865	682	457	419	24	540	278
	280S-2	380		75	1899	1000	550	1475	520	865	682	457	368	24	510	275
	250M-2	380		55	1899	1000	520	1410	440	830	660	406	349	24	380	275




CW200-150

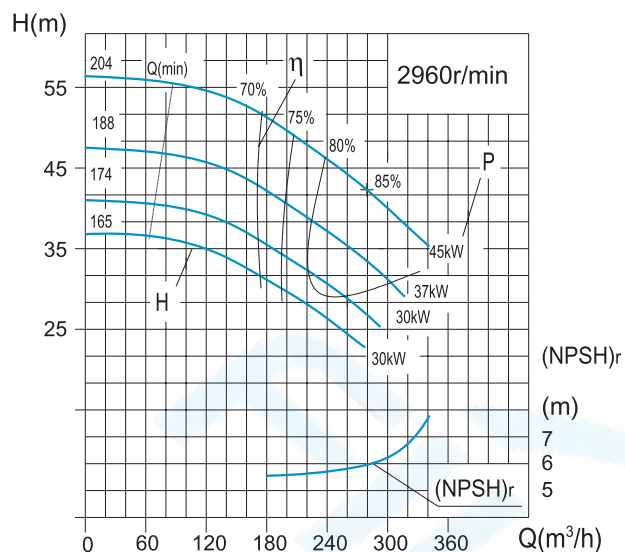

CW200-150A

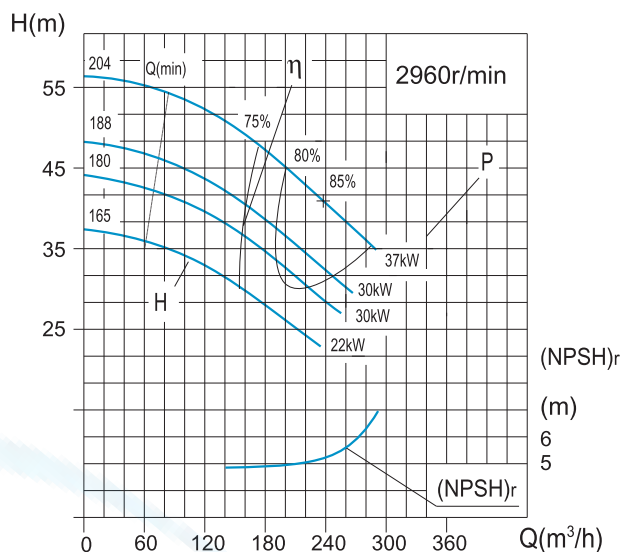


泵型号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency %	(NPSH) _r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW200-150	204	168	46.7	53	2960	34.6	45	70	5.9	220
		280	77.8	43		38.6		85		
		342	95.0	36		41.4		81		
	188	155	42.9	44	2960	27.4	37	68	5.5	218
		258	71.6	36		30.3		83		
		315	87.4	30		32.3		79		
	174	144	39.9	38	2960	22.7	30	66	5.3	216
		239	66.5	31		24.9		81		
		292	81.2	26		26.6		77		
	165	136	37.8	34	2960	19.9	30	64	5.1	215
		227	63.0	28		21.7		79		
		277	77.0	23		23.3		75		
CW200-150A	204	143	39.6	51	2960	31.6	37	63	5.3	218
		238	66.0	42		31.7		85		
		290	80.6	35		34.8		80		
	188	131	37.2	43	2960	25.4	30	61	5.0	217
		219	62.0	35		25.3		83		
		267	75.8	30		27.8		78		
	180	125	33.9	40	2960	23.0	30	59	4.7	216
		209	56.4	32		22.7		81		
		255	68.9	27		24.9		76		
	164	115	32.1	33	2960	18.2	22	57	4.6	215
		192	53.5	26		17.2		79		
		235	65.3	22		19.0		74		

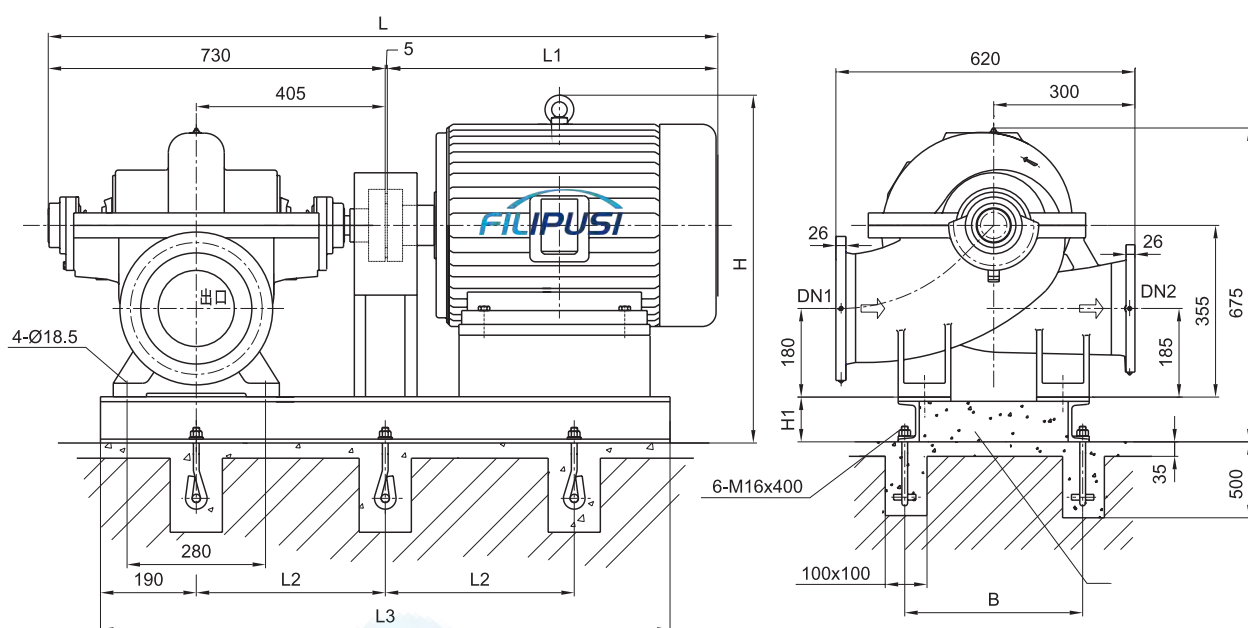


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)							重量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	H1	电机 Motor	底座 Baseplate
CW200-150/150A	225M-2	380		45	1550	815	425	1230	400	780	120	297	162
	200L ₂ -2	380		37	1510	775	410	1200	350	730	100	239	165
	200L1-2	380		30	1510	775	410	1200	350	730	100	220	165
	180M-2	380		22	1405	670	370	1120	290	710	100	169	164




CW200-150

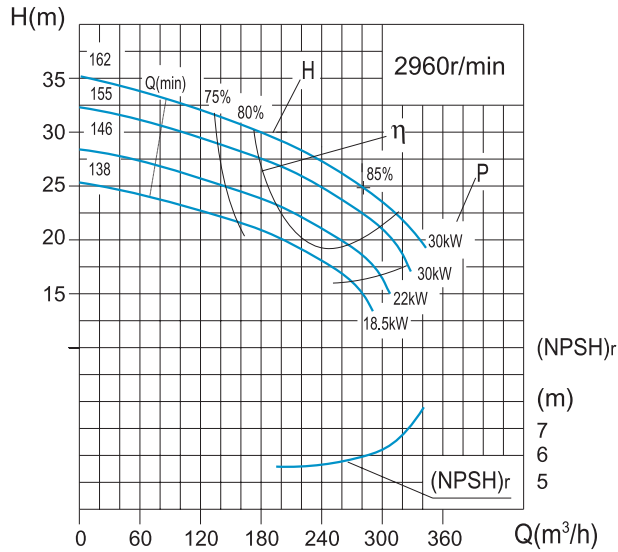

CW200-150A

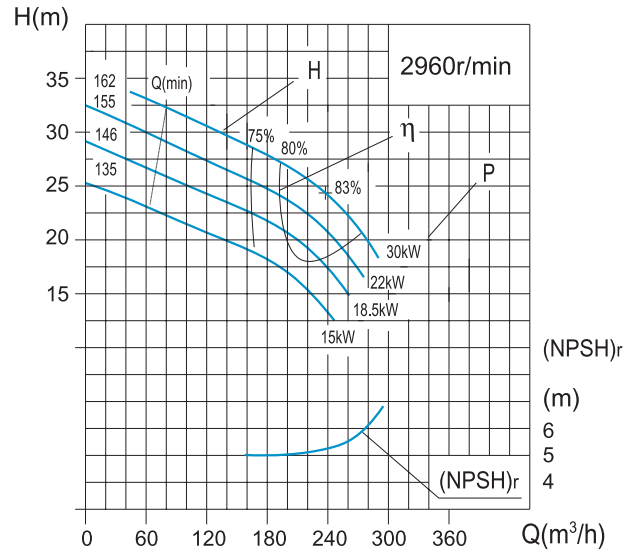


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency %	(NPSH) _r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW200-150	162	168	46.7	31	2960	17.5	30	80	5.9	220
		280	77.8	26		23.3		85		
		342	95.0	19		23.3		77		
	155	161	44.8	28	2960	15.9	30	78	5.7	219
		269	74.7	23		20.5		83		
		328	91.2	18		21.1		75		
	146	151	42.0	25	2960	13.4	22	76	5.5	218
		252	70.0	20		17.3		81		
		308	85.5	16		17.9		73		
	138	143	39.7	22	2960	11.6	18.5	74	5.3	217
		238	66.1	18		14.9		79		
		291	80.8	14		15.5		71		
CW200-150A	162	143	39.6	30	2960	15.9	30	72	5.3	219
		238	66.0	25		19.2		85		
		290	80.6	19		19.5		76		
	155	136	38.0	27	2960	14.3	22	70	5.1	218
		227	63.4	23		17.1		83		
		277	77.4	17		17.5		74		
	146	128	36.8	24	2960	12.3	18.5	68	5.0	217
		214	61.4	20		14.7		81		
		261	75.0	15		15.0		72		
	135	121	33.7	21	2960	10.7	15	66	4.7	216
		202	56.1	17		11.8		79		
		247	68.5	13		12.4		70		

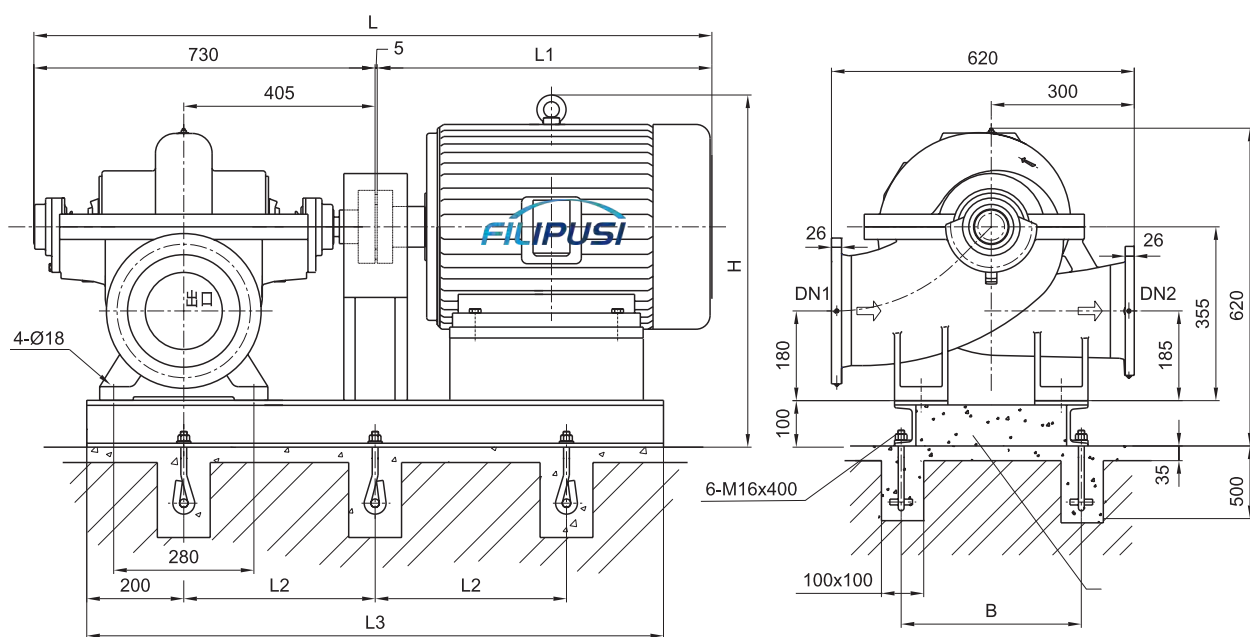


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)						重量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	电机 Motor	底座 Baseplate
CW200-150/150A	200L1-2	380		30	1510	775	410	1200	350	730	220	120
	180M-2	380		22	1405	670	370	1120	290	705	169	122
	160L-2	380		18.5	1385	650	370	1120	290	680	134	124
	160M2-2	380		15	1340	605	350	1080	290	680	117	121


CW250-150

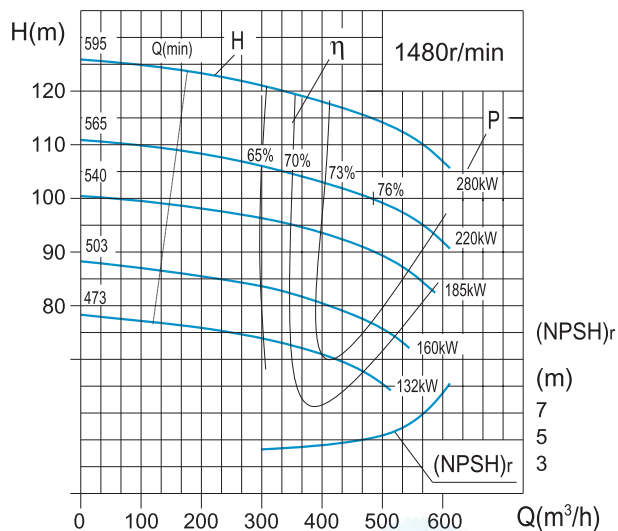

CW250-150A

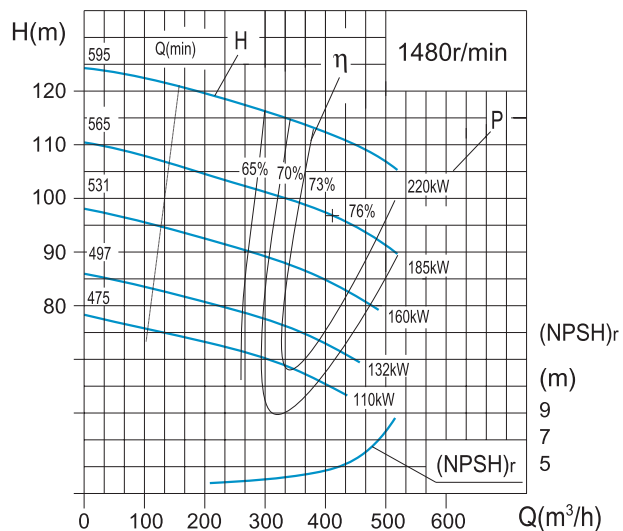


泵型号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	重量 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW250-150	595	301	83.6	122	1480	156.2	280	64	5.1	599
		491	136.4	115		207.7		74		
		589	163.6	103		232.6		71		
	565	291	80.8	106	1480	131.2	220	64	5.0	597
		485	134.7	100		173.7		76		
		582	161.7	91		199.4		72		
	540	279	77.6	97	1480	118.9	185	62	4.9	594
		466	129.3	91		151.8		76		
		559	155.3	84		179.0		71		
	503	259	71.9	83	1480	97.9	160	60	4.8	591
		432	119.9	79		125.8		74		
		518	143.9	72		146.7		69		
	473	244	67.9	74	1480	85.2	132	58	4.7	589
		407	113.2	70		106.3		73		
		488	135.6	64		124.9		68		
CW250-150A	595	258	71.7	118	1480	148.0	220	56	5.0	598
		432	120.0	110		177.2		73		
		518	143.9	100		201.4		70		
	565	247	68.6	103	1480	119.7	185	58	4.9	596
		412	114.3	97		142.7		76		
		494	137.2	89		167.6		71		
	531	232	64.5	91	1480	103.0	160	56	4.8	593
		387	107.5	86		120.1		75		
		464	128.9	78		141.6		70		
	497	217	60.4	79	1480	87.7	132	54	4.7	590
		362	100.6	75		99.9		74		
		434	120.6	69		117.8		69		
	475	207	57.6	72	1480	79.2	110	52	4.6	588
		346	96.0	68		88.0		73		
		415	115.3	63		104.1		68		

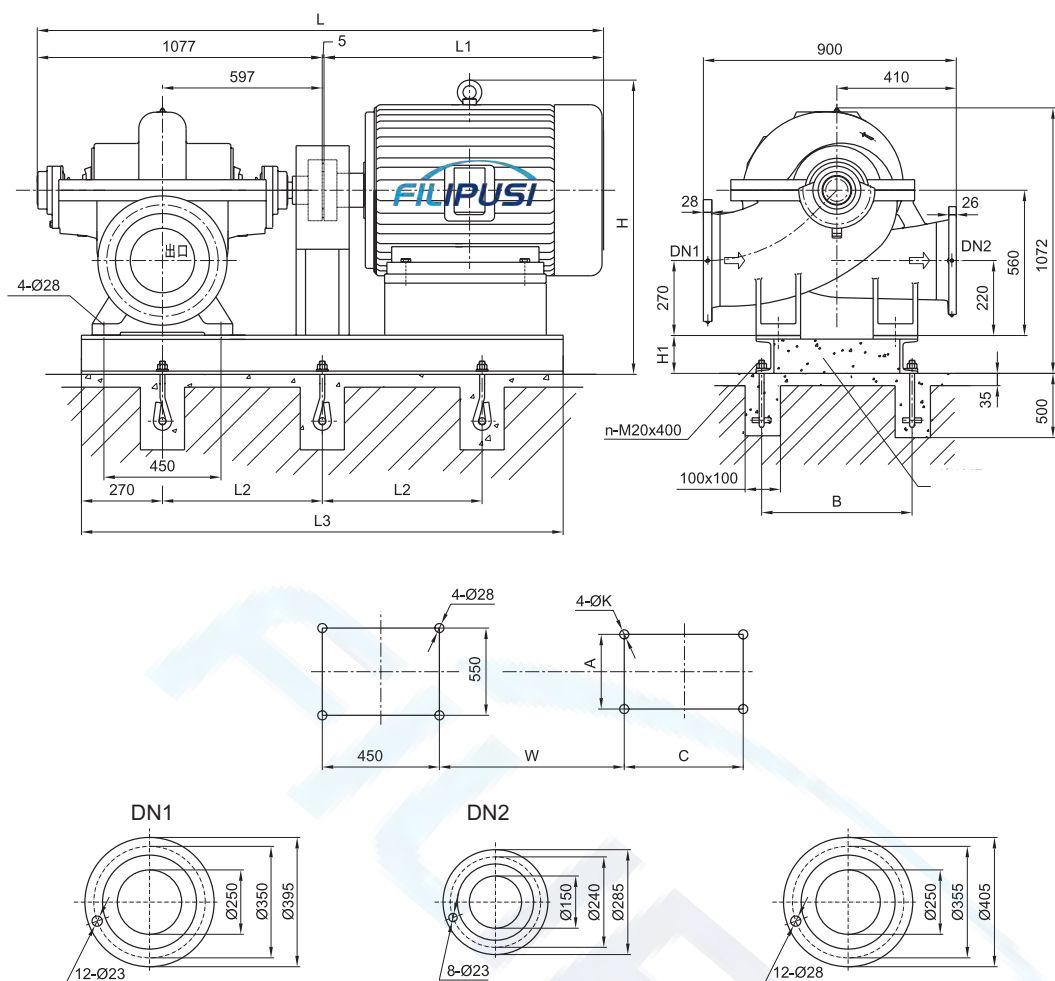


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)												重量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	H1	W	A	C	K	n	电机 Motor	底座 Baseplate
CW250-150/150A	355M-4	380		280	2702	1620	730	2000	680	1485	160	841	610	560	28	6	1460	298
	315M-4	380		220	2352	1270	650	1840	560	1335	160	763	508	457	28	6	1075	296
	315M-4	380		185	2352	1270	650	1840	560	1335	160	763	508	457	28	6	985	296
	315S-4	380		160	2242	1160	650	1840	560	1335	160	763	508	406	28	6	870	294
	280M-4	380		132/110	2222	1140	605	1750	560	1205	140	737	457	419	24	6	820	292
	355-4	6000		220~280	2952	1870	670	2545	740	1575	160	902	630	900	28	8	1800	350
	450-4	10000		220~280	3082	2000	750	2805	920	1260	160	942	800	1120	35	8	2710	375
	355L ₁ -4	380		280	2652	1570	730	2000	680	1395	160	801	610	630	28	6	1870	301
	355M-4	380		220	2652	1570	730	2000	680	1395	160	801	610	560	28	6	1720	298
	315L-4	380		185/160	2422	1340	670	1880	560	1270	160	763	508	508	28	6	1170	300
	315M-4	380		132	2422	1340	650	1840	560	1270	160	763	508	457	28	6	1010	296
	315S-4	380		110	2352	1270	630	1800	560	1270	160	763	508	406	28	6	930	294


CW250-150

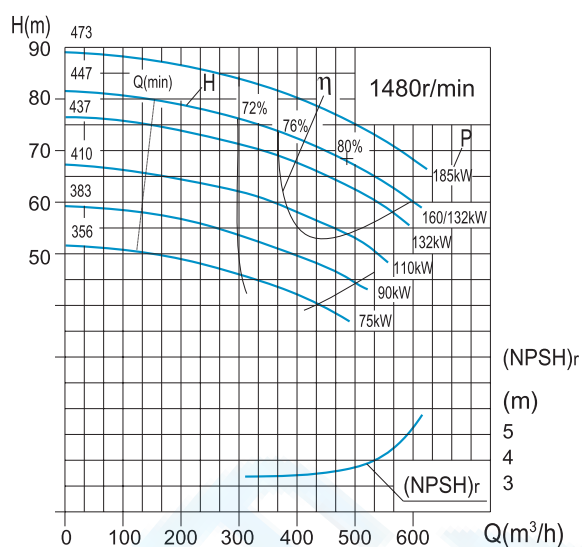

CW250-150A

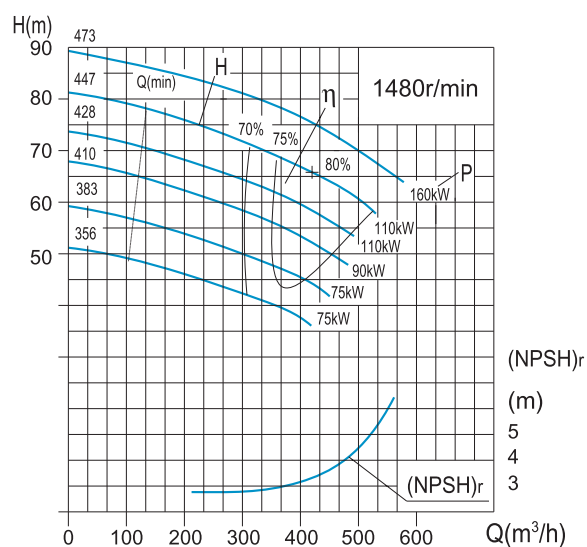


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW250-150	473	302	83.9	84	1480	97.3	185	71	3.5	518
		493	136.9	75		129.0		78		
		631	175.3	67		153.4		75		
	447	291	80.8	77	1480	84.7	* 160/132	72	3.4	516
		485	134.7	66		108.9		80		
		612	170.0	59		129.3		76		
	437	282	78.4	72	1480	77.4	132	71	3.3	514
		470	130.7	64		103.3		79		
		594	164.9	55		118.3		75		
	410	265	73.6	63	1480	65.8	110	69	3.2	512
		441	122.6	56		87.5		77		
		550	152.8	48		99.1		73		
	383	247	68.7	55	1480	55.2	90	67	3.0	510
		412	114.5	49		73.2		75		
		520	144.5	42		84.1		71		
	356	230	63.9	47	1480	45.0	75	66	2.9	508
		383	106.4	42		59.6		74		
		483	134.3	36		68.5		70		
CW250-150A	473	258	71.7	83	1480	88.3	160	66	3.1	517
		432	120.0	75		114.5		77		
		535	148.6	67		133.7		73		
	447	252	70.0	75	1480	76.3	110	67	3.0	515
		420	116.7	64		91.5		80		
		520	144.4	57		107.2		75		
	428	239	66.4	67	1480	67.1	110	65	3.0	513
		399	110.8	59		82.2		78		
		504	140.0	52		97.7		73		
	410	229	63.7	62	1480	61.4	90	63	2.9	511
		382	106.2	54		73.3		77		
		482	134.0	48		87.3		72		
	383	214	59.5	54	1480	51.6	75	61	2.8	509
		357	99.2	47		60.6		76		
		451	125.1	42		71.9		71		
	356	199	55.3	47	1480	42.9	75	59	2.6	507
		332	92.2	41		49.9		74		
		419	116.3	36		59.4		69		

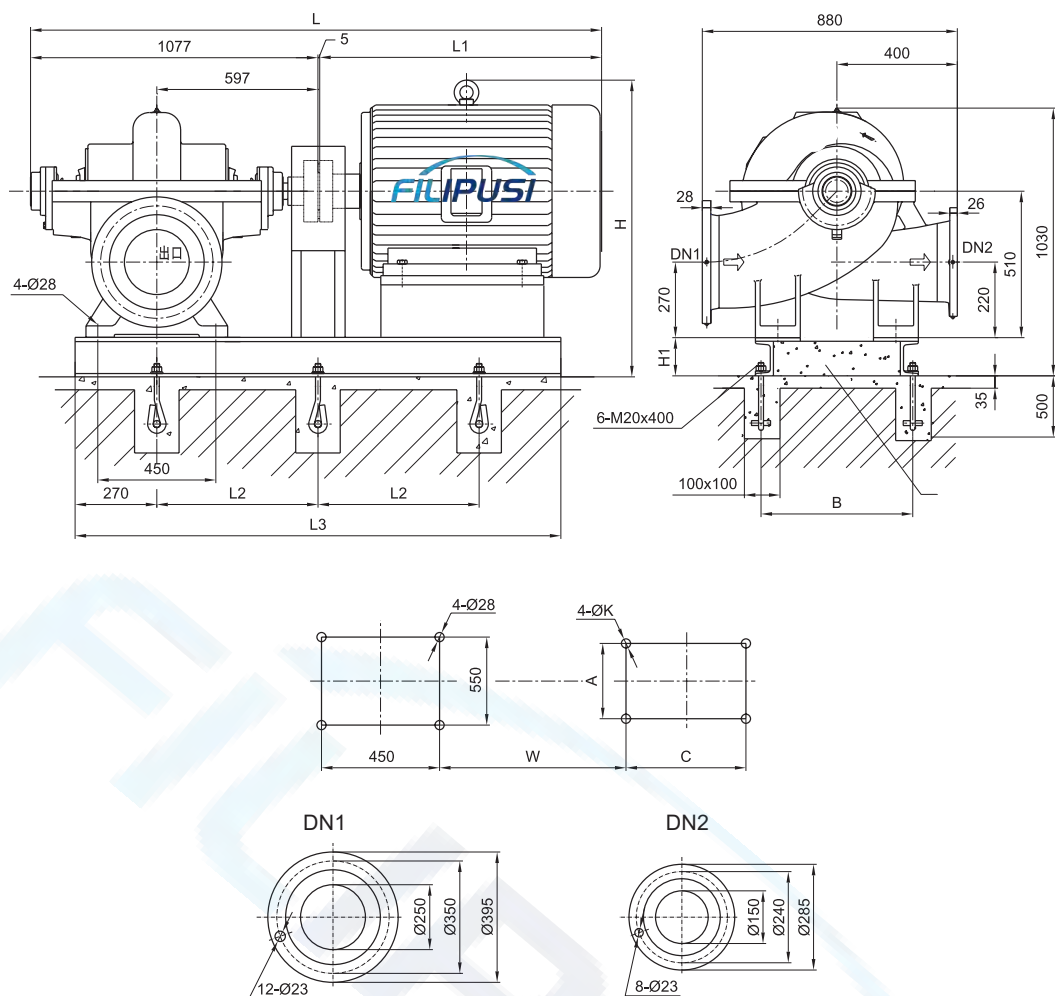


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)												重量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	H1	W	A	C	K	电机 Motor	底座 Baseplate	
CW250-150/150A	315M ₂ -4	380		185	2352	1270	650	1840	560	1285	160	763	508	457	28	985	263	
	315S-4	380		160	2242	1160	650	1790	560	1285	160	763	508	406	28	870	261	
	280M-4	380		132/110	2222	1140	605	1750	560	1141	140	737	457	419	24	820	260	
	315L ₂ -4	380		185	2422	1340	650	1860	560	1220	160	763	508	508	28	1170	264	
	315L ₁ -4	380		160	2422	1340	650	1860	560	1220	160	763	508	508	28	1070	264	
	315M-4	380		132	2422	1340	650	1840	560	1220	160	763	508	457	28	1010	263	
	315S-4	380		110	2352	1270	650	1790	560	1220	160	763	508	406	28	930	260	
	280M-4	380		90	2132	1050	605	1720	560	1000	140	707	457	419	24	600	259	
	280S-4	380		75	2082	1000	605	1670	560	1000	140	707	457	368	24	510	258	


CW250-200

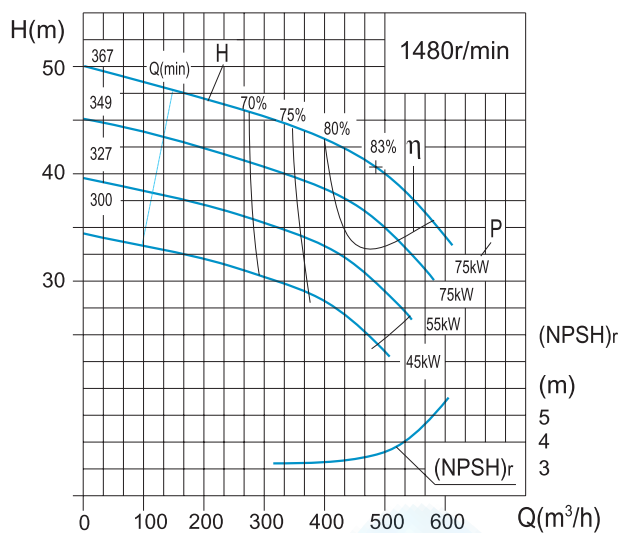

CW250-200

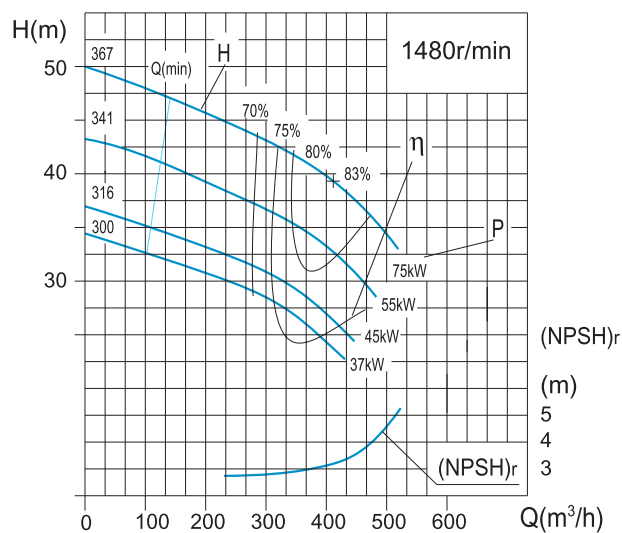


泵型号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency %	(NPSH) _r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW250-200	367	291	80.8	46	1480	50.1	75	72	3.4	402
		485	134.7	41		64.7		83		
		612	170.0	34		71.7		79		
	349	276	76.8	41	1480	44.2	75	70	3.2	399
		461	128.0	37		56.8		81		
		581	161.5	30		61.9		77		
	327	259	71.9	36	1480	37.4	55	68	3.1	396
		432	119.9	32		47.9		79		
		545	151.3	26		51.5		76		
	300	242	67.1	31	1480	31.3	45	66	3.0	395
		403	111.8	27		38.4		77		
		490	141.1	23		40.9		75		
CW250-200A	367	247	68.6	44	1480	45.7	75	65	3.0	401
		412	114.3	39		53.1		83		
		519	144.2	33		60.3		78		
	341	230	65.8	38	1480	38.0	55	63	2.9	398
		383	109.7	34		43.8		81		
		483	138.5	29		49.7		76		
	316	212	61.0	33	1480	31.0	45	61	2.8	395
		354	101.7	29		35.5		79		
		447	128.4	25		40.4		74		
	300	205	56.9	30	1480	28.8	37	59	2.7	394
		342	94.9	25		30.2		77		
		415	115.3	21		32.9		72		

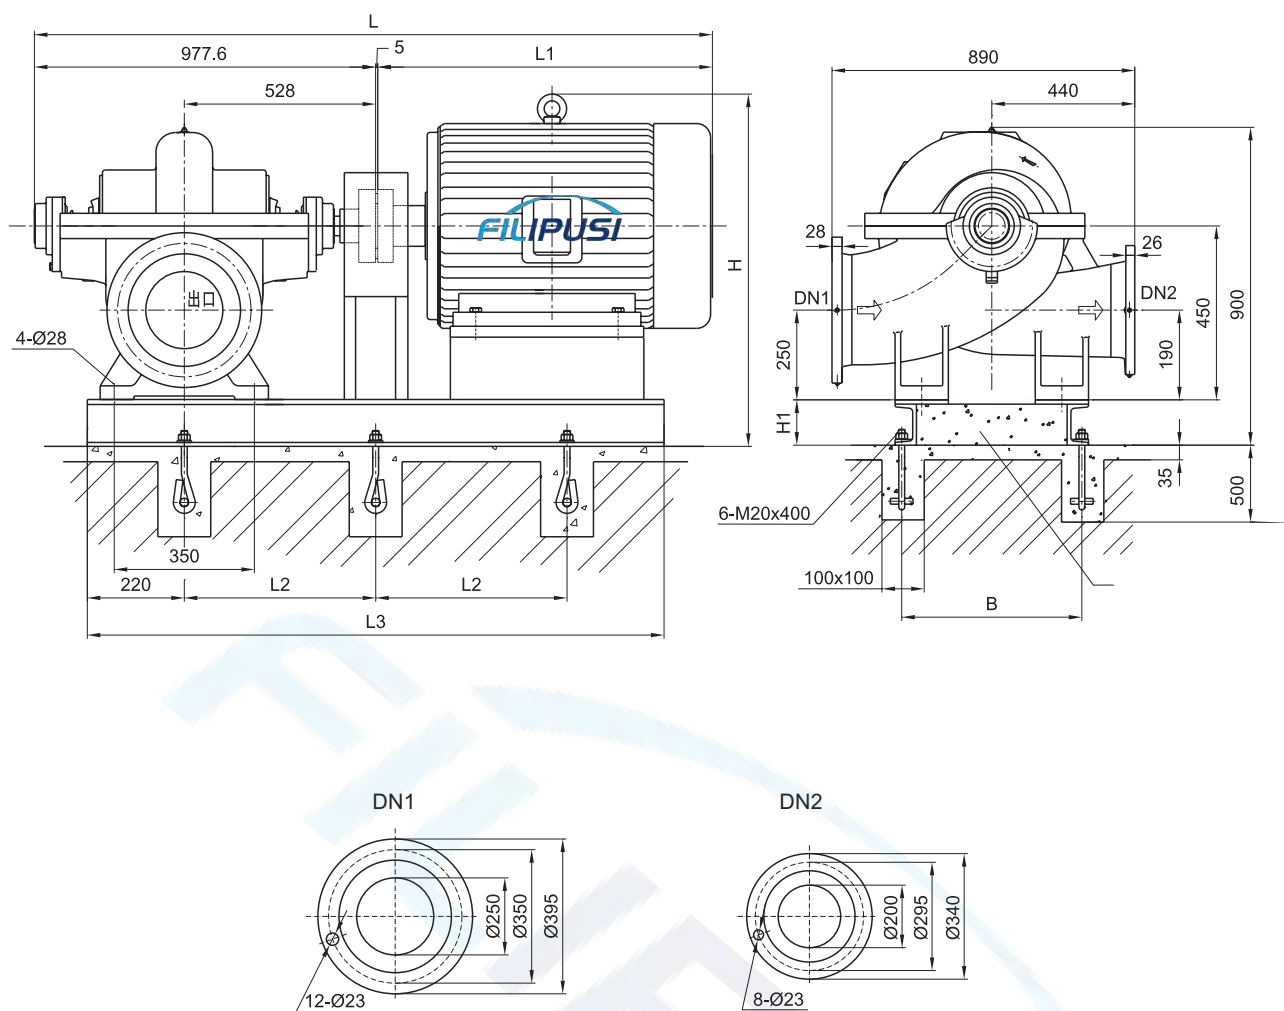


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)							重量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	H1	电机 Motor	底座 Baseplate
CW250-200/200A	280S-4	380		75	1985	1000	560	1560	500	955	140	510	200
	250M-4	380		55	1915	930	520	1480	460	890	120	385	198
	225M-4	380		45	1830	845	485	1410	460	870	120	322	196
	225S-4	380		37	1800	815	470	1380	460	870	120	287	194




CW250-200

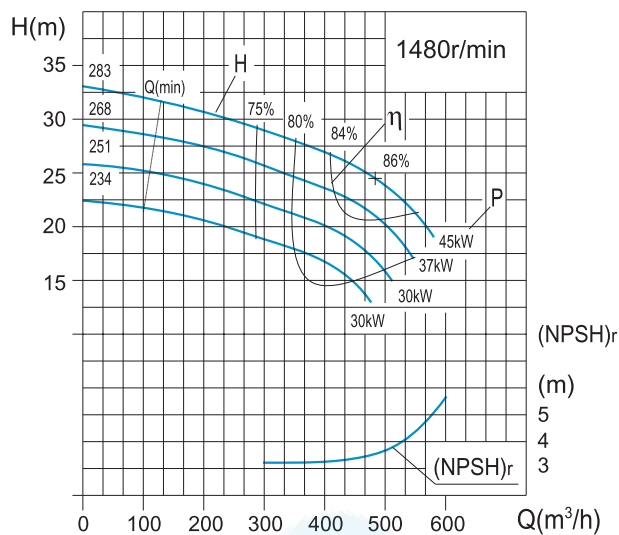

CW250-200A

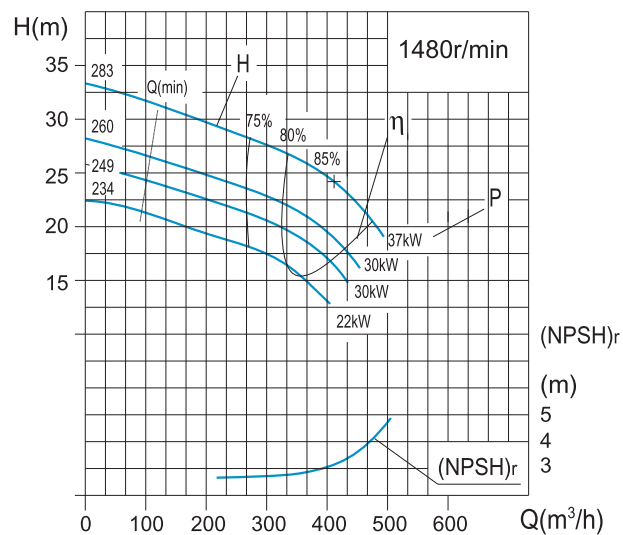


泵型号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency %	(NPSH) _r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW250-200	283	291	80.8	29	1480	30.6	45	75	3.4	382
		485	134.7	24		36.9		86		
		582	161.7	20		38.7		82		
	268	274	76.0	26	1480	26.8	37	73	3.2	380
		456	126.6	22		32.7		84		
		547	152.0	17		31.7		80		
	251	256	71.1	23	1480	22.3	30	72	3.1	378
		427	118.6	19		27.1		83		
		512	142.3	15		26.4		79		
	234	239	66.3	20	1480	18.5	30	70	2.9	376
		398	110.5	17		22.5		81		
		477	132.6	13		21.9		77		
CW250-200A	283	247	68.6	28	1480	28.0	37	68	3.0	381
		412	114.3	23		30.3		86		
		494	137.2	20		32.5		81		
	260	227	65.8	24	1480	22.4	30	66	2.9	379
		379	109.7	20		24.1		84		
		454	131.7	17		25.9		79		
	249	217	63.1	22	1480	20.3	30	64	2.8	377
		362	105.2	18		21.6		82		
		435	126.2	15		23.3		77		
	234	202	56.2	19	1480	16.9	22	62	2.6	375
		337	93.7	16		17.9		80		
		405	112.5	13		19.3		75		

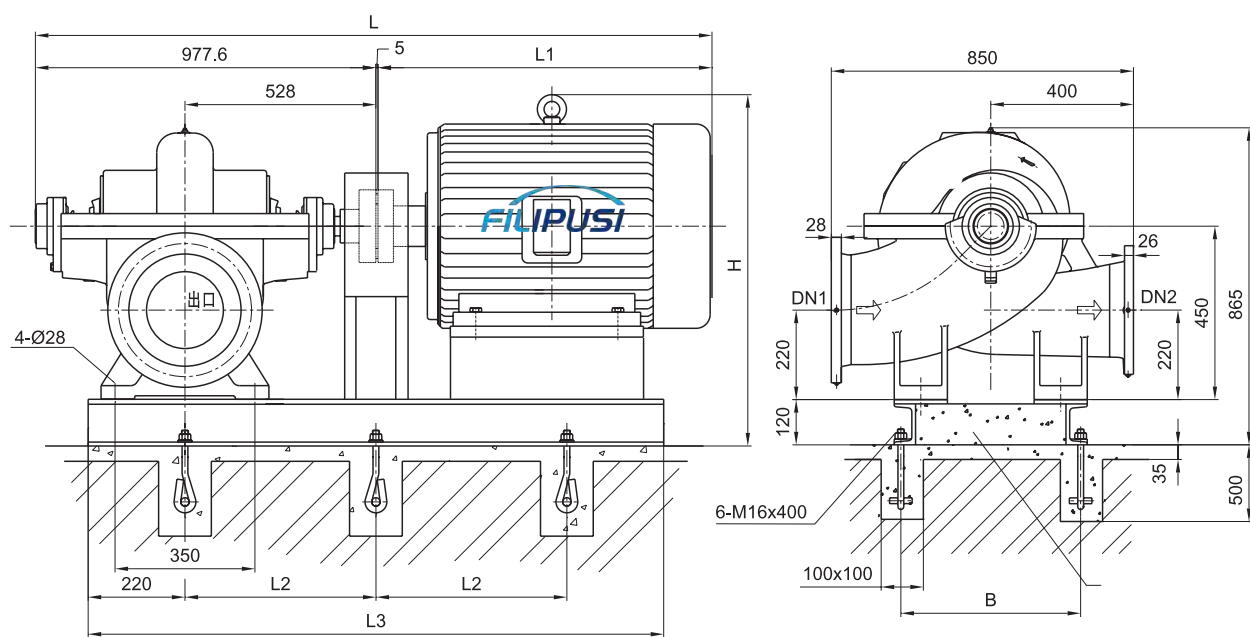


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)						重量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	电机 Motor	底座 Baseplate
CW250-200/200A	225M-4	380		45	1830	845	485	1410	460	870	322	190
	225S-4	380		37	1805	820	470	1390	460	870	287	192
	200L-4	380		30	1760	775	460	1360	460	840	232	194
	180L-4	380		22	1695	710	440	1320	460	815	181	195


CW250-200

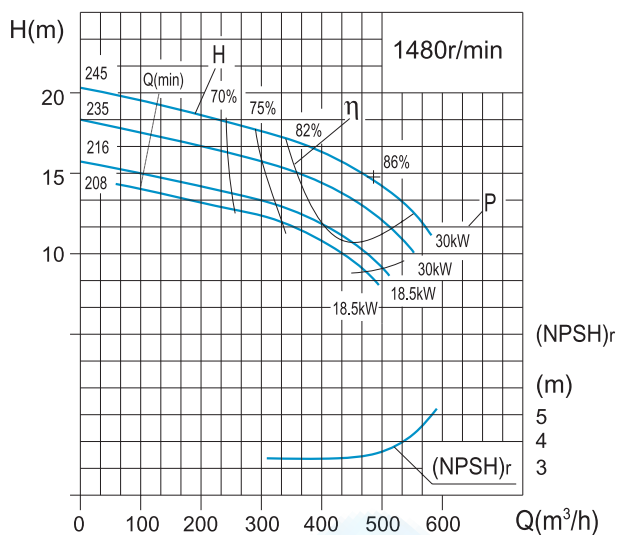

CW250-200A

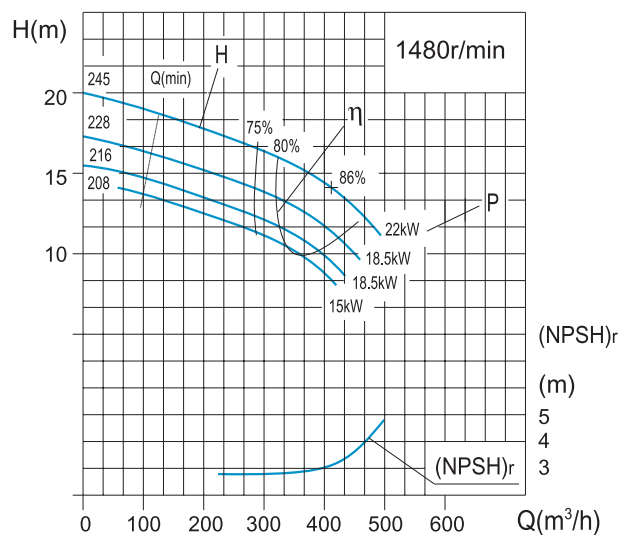


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW250-200	245	291	80.8	18	1480	18.7	30	75	3.4	312
		485	134.7	15		22.4		86		
		582	161.7	12		23.5		81		
	235	276	76.8	17	1480	17.5	30	73	3.2	310
		461	128.0	14		20.9		84		
		553	153.6	11		21.0		79		
	216	256	71.1	14	1480	13.5	18.5	71	3.1	308
		427	118.6	11		16.0		82		
		512	142.3	9		15.6		77		
	208	247	68.7	13	1480	12.5	18.5	69	3.0	307
		412	114.5	11		14.8		80		
		495	137.4	8		14.5		75		
CW250-200A	245	247	68.6	17	1480	17.1	22	68	3.0	311
		412	114.3	14		18.4		86		
		494	137.2	12		19.7		80		
	228	230	65.2	15	1480	14.2	18.5	66	2.9	309
		383	108.6	12		15.1		84		
		459	130.3	10		16.3		78		
	216	217	61.7	13	1480	12.4	18.5	64	2.8	307
		362	102.9	11		13.1		82		
		435	123.5	9		14.1		76		
	208	210	58.3	12	1480	11.5	15	62	2.7	306
		350	97.2	10		12.1		80		
		420	116.6	8		13.1		74		

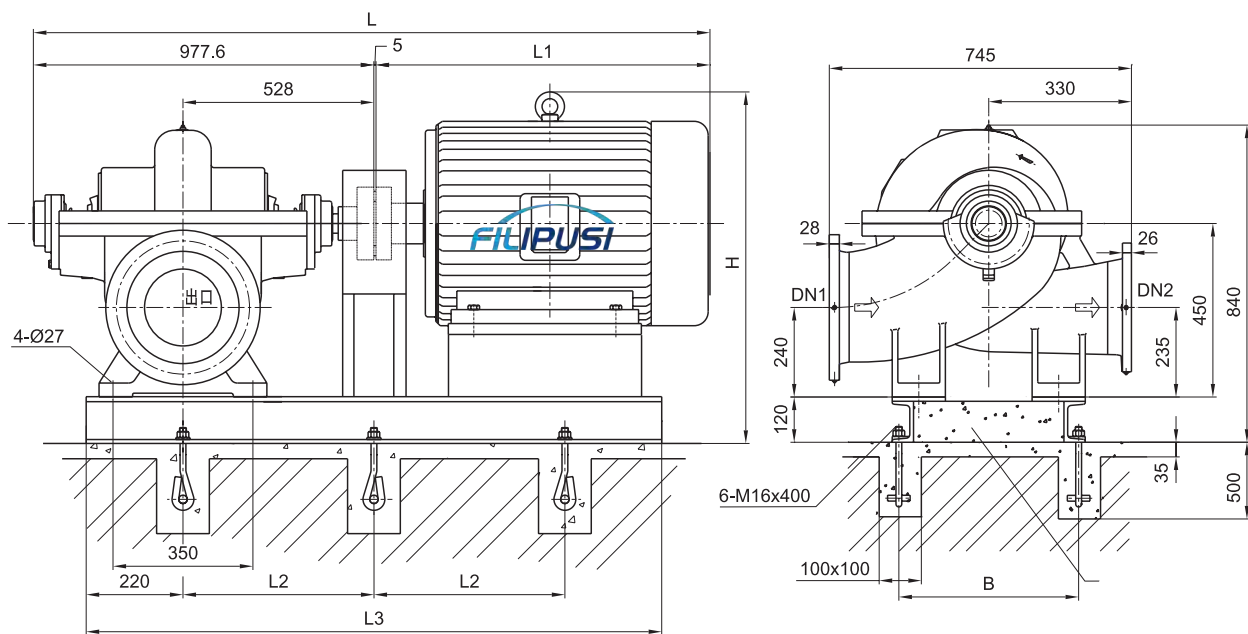


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)						重量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	电机 Motor	底座 Baseplate
CW250-200/200A	200L-4	380		30	1760	775	460	1360	460	840	232	185
	180L-4	380		22	1695	710	440	1320	460	815	181	187
	180M-4	380		18.5	1655	670	420	1280	460	815	167	182
	160L-4	380		15	1635	650	420	1280	460	790	133	186

CW300-200

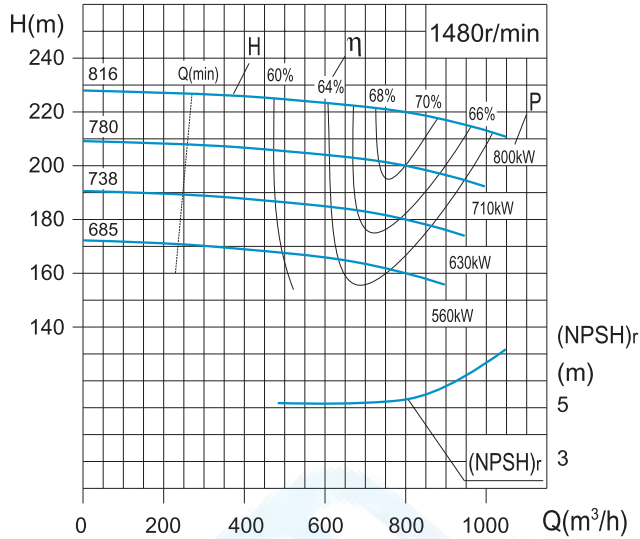


CW300-200A

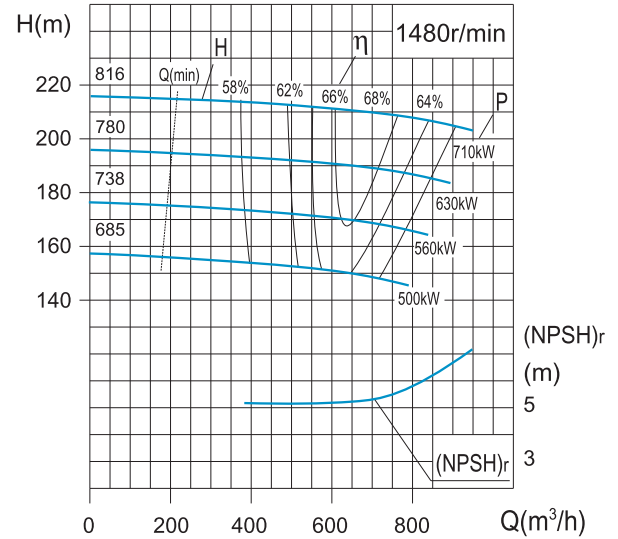


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW300-200	816	474	131.7	225	1480	476.1	800	61	5.3	1388
		790	219.4	220		676.2		70		
		909	252.4	215		799.9		66.5		
	780	459	127.5	205	1480	427.1	710	60	5.2	1385
		765	212.5	200		603.9		69		
		880	244.4	195		707.9		66		
	738	442	122.7	186	1480	375.9	630	59.5	5.1	1381
		736	204.4	180		538.5		67		
		846	235.1	174		617.0		65		
	685	424	117.8	166	1480	330.6	560	58	5.0	1376
		707	196.4	160		473.9		65		
		813	225.8	153		537.7		63		
CW300-200A	816	402	111.7	214	1480	390.5	710	60	5.3	1387
		670	186.1	210		563.5		68		
		777	215.9	205		667.5		65		
	780	388	107.8	194	1480	353.6	630	58	5.2	1385
		647	179.7	190		499.7		67		
		751	208.5	185		590.8		64		
	738	375	104.2	175	1480	308.1	560	58	5.1	1382
		625	173.6	170		435.1		66.5		
		731	203.1	165		517.5		63.5		
	685	361	100.3	156	1480	269.2	500	57	5.0	1378
		602	167.2	150		378.3		65		
		710	197.3	144		449.3		62		


CW300-200

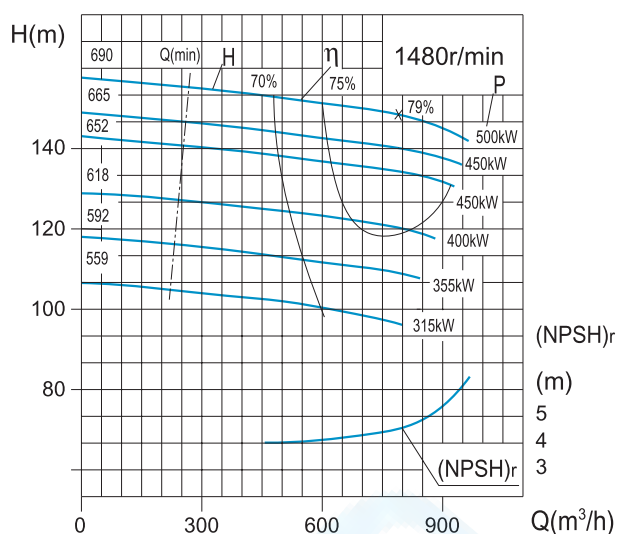

CW300-200A

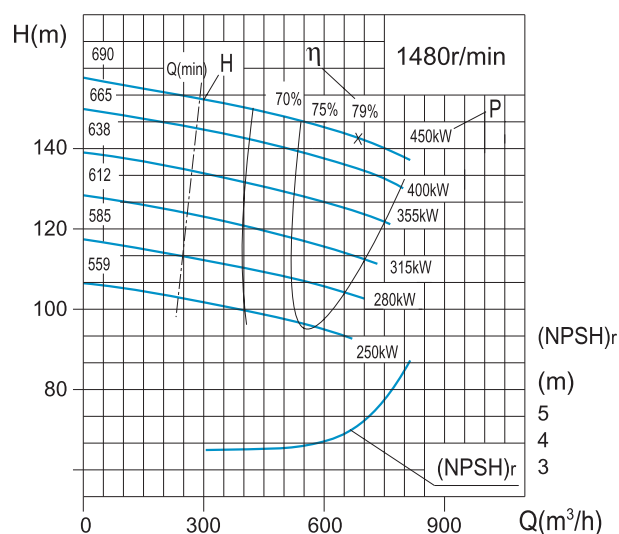


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW300-200	690	489	135.8	153	1480	286.9		71		
		815	226.4	150	1480	421.3	500	79	4.6	1003
		970	269.4	142	1480	487.0		77		
	665	474	131.7	145	1480	267.0		70		
		790	219.4	140	1480	386.5	450	78	4.6	1000
		928	263.3	133	1480	442.3		76		
	652	465	129.0	139	1480	255.0		69		
		774	215.1	135	1480	368.5	450	77	4.6	998
		929	258.1	131	1480	440.5		75		
	618	441	122.5	125	1480	224.4		67		
		735	204.1	121	1480	323.3	400	75	4.4	995
		882	244.9	118	1480	386.7		73		
	592	422	117.2	115	1480	202.7		65		
		703	195.3	111	1480	291.1	355	73	4.3	993
		844	234.4	108	1480	348.5		71		
	559	398	110.6	102	1480	175.9		63		
		664	184.3	99	1480	251.7	315	71	4.1	990
		796	221.2	96	1480	301.5		69		
CW300-200A	690	411	114.1	146	1480	233.2		70		
		685	190.2	143	1480	337.3	450	79	4.2	1001
		815	226.3	138	1480	402.8		76		
	665	402	111.7	140	1480	225.8		68		
		670	186.2	136	1480	317.4	400	78	4.2	999
		804	223.4	130	1480	379.5		75		
	638	386	110.0	129	1480	199.7		68		
		644	183.4	125	1480	280.8	355	78	4.1	997
		772	220.1	120	1480	335.7		75		
	612	370	106.1	119	1480	178.4		67		
		617	176.9	115	1480	250.4	315	77	4.0	994
		740	212.3	110	1480	299.5		74		
	585	354	100.6	109	1480	158.5		66		
		590	167.6	105	1480	222.0	280	76	3.9	992
		708	201.1	101	1480	265.7		73		
	559	338	97.2	99	1480	140.0		65		
		563	162.0	96	1480	195.7	250	75	3.8	989
		676	194.4	92	1480	234.3		72		

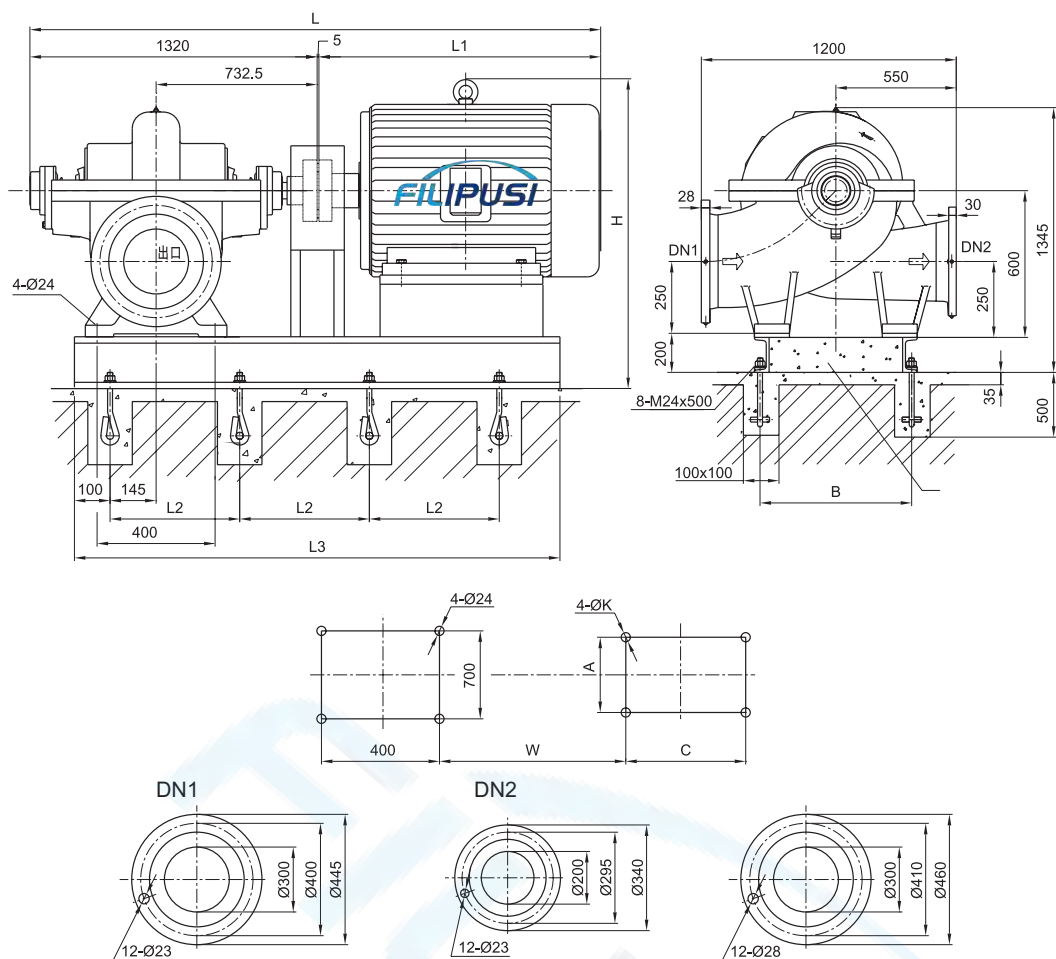


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)										重量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	W	A	C	K	电机 Motor	底座 Baseplate
CW300-200/200A	355L ₁ -4	380		355	3015	1690	595	2157	700	1565	1001.5	610	630	28	1630	588
	355M-4	380		315/280	2945	1620	580	2122	700	1565	1001.5	610	560	28	1530	580
	315M-4	380		250	2595	1270	560	2030	700	1450	923.5	508	457	28	1075	576
	400-4	6000		500~355	3265	1940	810	2788	840	1235	1082.5	710	1000	35	2520	601
	355-4	6000		315~250	3145	1820	810	2660	700	1225	1062.5	630	900	28	1870	590
	450-4	10000		500~250	3375	2050	880	2920	920	1300	1102.5	800	1120	35	3315	630
	400L-4	380		500	3245	1920	710	2510	700	1590	1027.5	686	710	35	3200	592
	400M-4	380		450/400	3245	1920	710	2510	700	1590	1027.5	686	630	35	3100	592
	400S-4	380		355	3245	1920	710	2510	700	1590	1027.5	686	630	35	2900	592
	355L-4	380		315/280	2858	1530	585	2117	700	1460	961.5	610	630	28	1870	568
	355M-4	380		250	2858	1530	585	2117	700	1460	961.5	610	560	28	1720	568


CW300-200

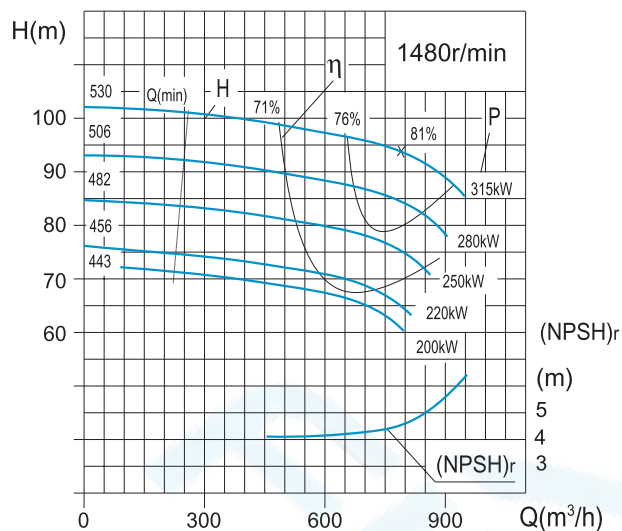

CW300-200A

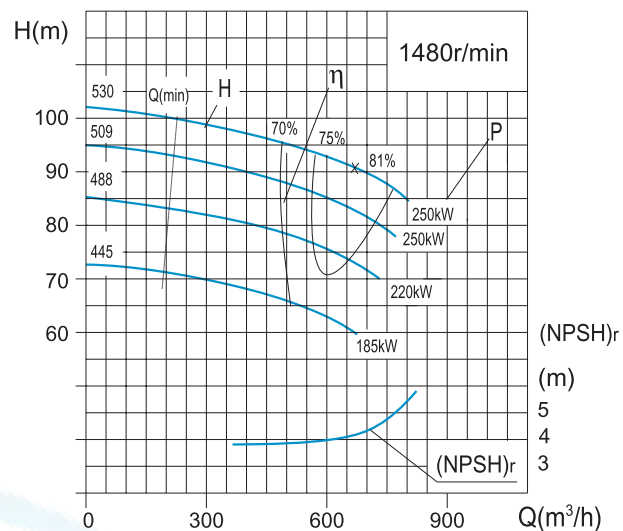


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW300-200	530	474	131.7	98	1480	178.2	315	71	4.6	848
		790	219.4	94		249.0		81		
		948	263.3	86		284.6		78		
	509	455	126.4	91	1480	166.2	280	68	4.5	846
		758	210.7	86		228.8		78		
		910	252.8	79		260.2		75		
	482	431	119.8	82	1480	148.1	250	65	4.4	844
		719	199.7	78		202.7		75		
		863	239.6	71		230.8		72		
	456	408	113.2	73	1480	130.0	220	63	4.2	842
		679	188.7	69		177.0		73		
		815	226.5	63		201.8		70		
	443	398	110.6	70	1480	126.2	185	60	4.1	840
		664	184.3	65		167.8		70		
		790	221.2	58		183.5		68		
CW300-200A	530	402	111.7	95	1480	162.6	250	64	4.2	847
		670	186.2	91		204.5		81		
		804	223.4	83		235.5		77		
	509	386	107.3	87	1480	148.5	250	62	4.1	845
		644	178.8	84		185.5		79		
		772	214.5	76		213.9		75		
	488	370	102.8	80	1480	137.4	220	59	3.9	843
		617	171.3	77		169.7		76		
		740	205.6	70		196.0		72		
	445	338	93.8	67	1480	110.2	160	56	3.7	839
		563	156.4	64		134.5		73		
		676	187.7	59		155.7		69		

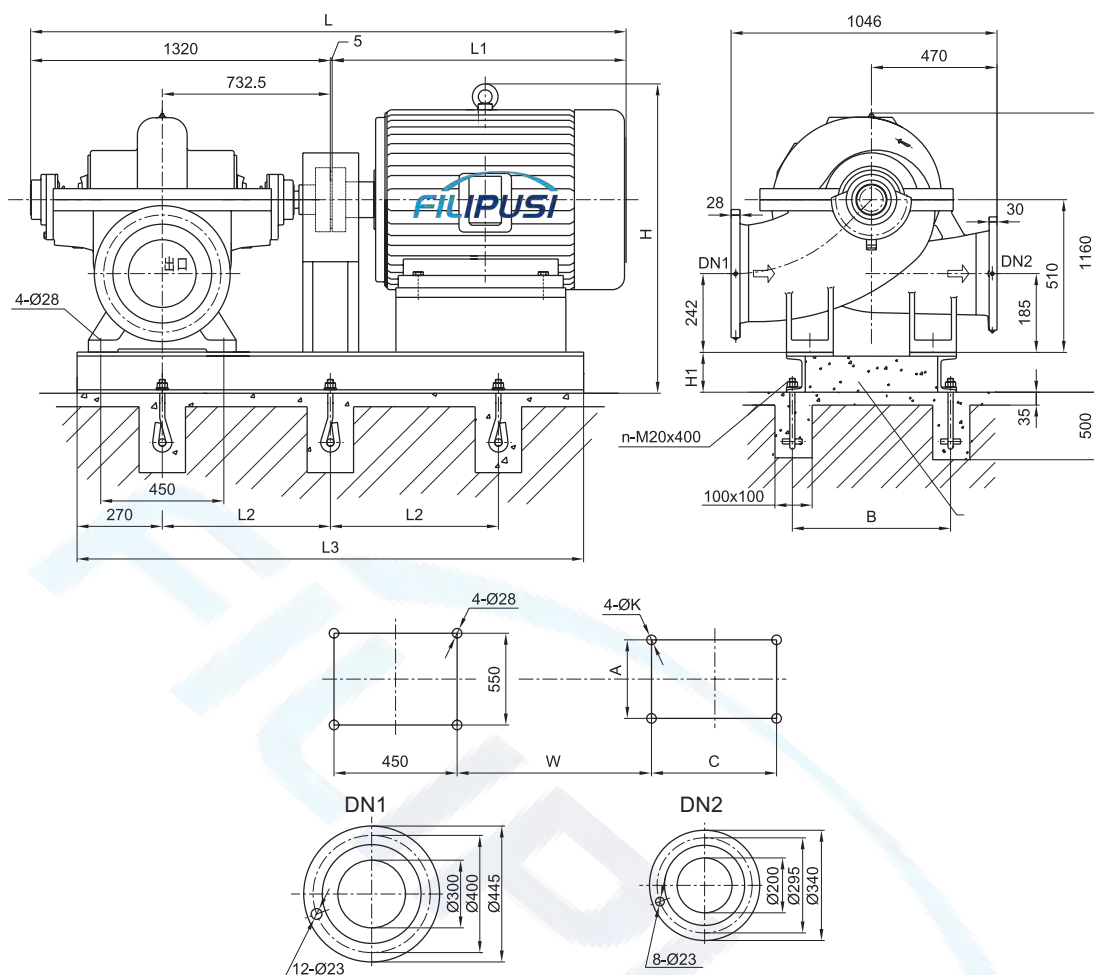


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)											重量 Weight (kg)		地脚数量
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	H1	W	A	C	K	电机 Motor	底座 Baseplate	n (个)
CW300-200/200A	355M-4	380		315/280	2945	1620	810	2160	700	1455	180	976.5	610	560	28	1530	514	6
	315M-4	380		250~200	2595	1270	730	2000	560	1285	160	898.5	508	457	28	1075	509	6
	355-4	6000		315	3145	1820	730	2660	750	1115	180	1037.5	630	900	28	2100	521	8
	355-4	6000		280~200	3145	1820	730	2660	750	1115	180	1037.5	630	900	28	2050	521	8
	450-4	10000		315~200	3375	2050	830	2920	920	1190	180	1077.5	800	1120	35	2790	550	8
	355LX-4	380		315	2895	1570	810	2160	700	1365	180	936.5	610	630	28	1870	514	6
	355L ₁ -4	380		280	2895	1570	810	2160	700	1365	180	936.5	610	630	28	1870	514	6
	355M ₂ -4	380		250	2895	1570	810	2160	700	1365	180	936.5	610	560	28	1720	514	6
	355M ₁ -4	380		220	2895	1570	810	2160	700	1365	180	936.5	610	560	28	1720	514	6
	315L ₂ -4	380		200/185	2665	1340	730	2000	560	1320	160	898.5	508	508	28	1170	509	6


CW300-250

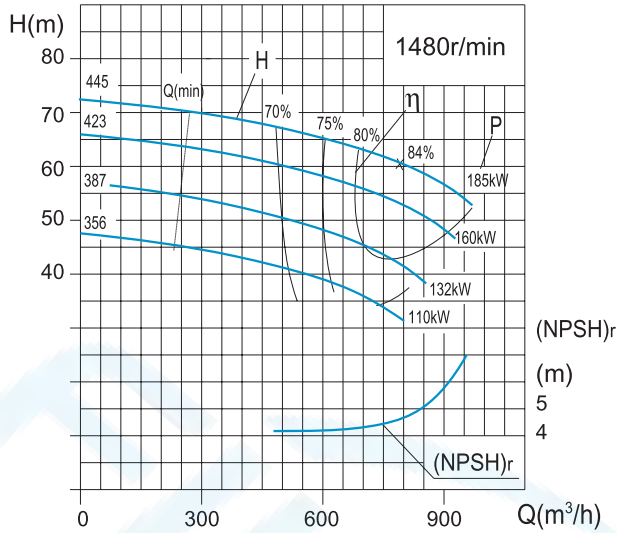

CW300-250A

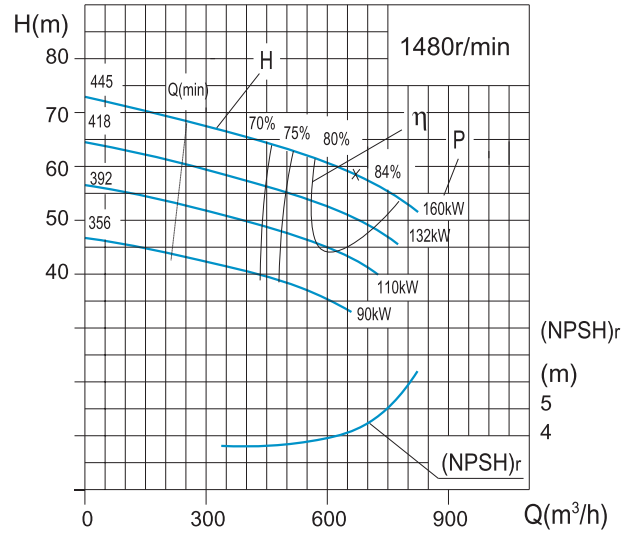


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW300-250	445	474	131.7	68	1480	124.9	185	70	4.6	606
		790	219.4	60		153.7		84		
		972	270.0	53		175.4		80		
	423	450	125.1	61	1480	110.2	160	68	4.5	604
		751	208.5	55		135.9		82		
		923	256.5	47		151.6		78		
	387	412	114.6	51	1480	87.2	132	66	4.2	602
		687	190.9	46		107.0		80		
		846	234.9	39		119.5		76		
	356	379	105.3	43	1480	69.9	110	64	4.0	600
		632	175.6	39		85.3		78		
		778	216.0	33		95.4		74		
CW300-250A	445	402	111.7	66	1480	114.0	160	63	4.2	605
		670	186.2	59		128.3		84		
		825	229.1	52		147.3		79		
	418	378	108.4	58	1480	97.7	132	61	4.1	603
		630	180.6	52		109.2		82		
		775	222.2	46		125.5		77		
	392	354	99.4	51	1480	82.9	110	59	3.9	601
		590	165.7	46		91.8		80		
		726	203.9	40		105.7		75		
	356	322	89.4	42	1480	64.5	90	57	3.6	599
		536	149.0	38		70.7		78		
		660	183.3	33		81.6		73		

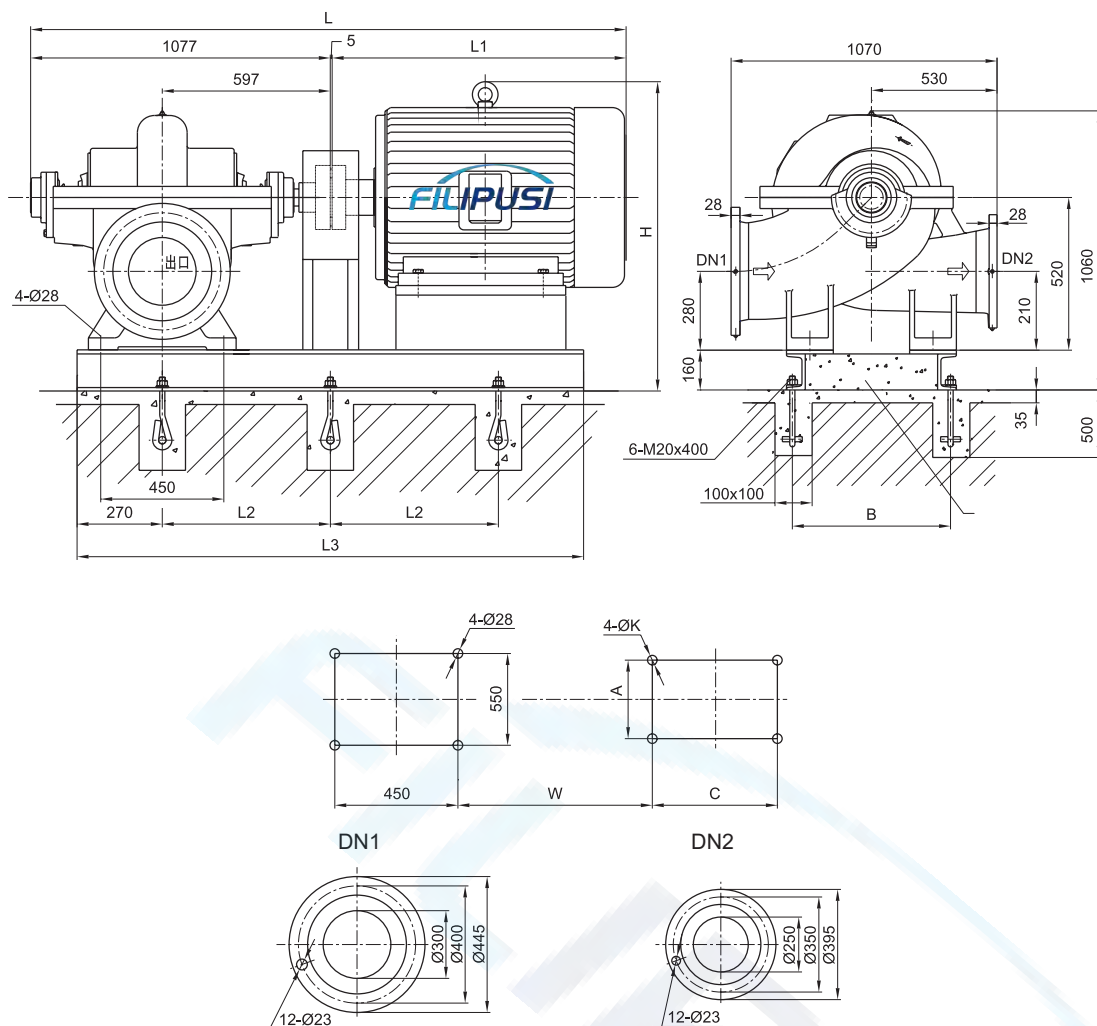


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)										重量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	W	A	C	K	电机 Motor	底座 Baseplate
CW300-250/250A	315M-4	380		185	2352	1270	730	1840	560	1295	763	508	457	28	985	390
	315S-4	380		160	2242	1160	730	1790	560	1295	763	508	406	28	870	387
	280M-4	380		132/110	2222	1140	600	1750	560	1185	737	457	419	24	820	386
	315L-4	380		185/160	2422	1340	730	1860	560	1220	763	508	508	28	1170	390
	315M-4	380		132	2422	1340	730	1840	560	1220	763	508	457	28	1010	390
	315S-4	380		110	2352	1270	730	1790	560	1220	763	508	406	28	930	387
	280M-4	380		90	2132	1050	600	1720	560	1020	707	457	419	24	600	385




CW300-250

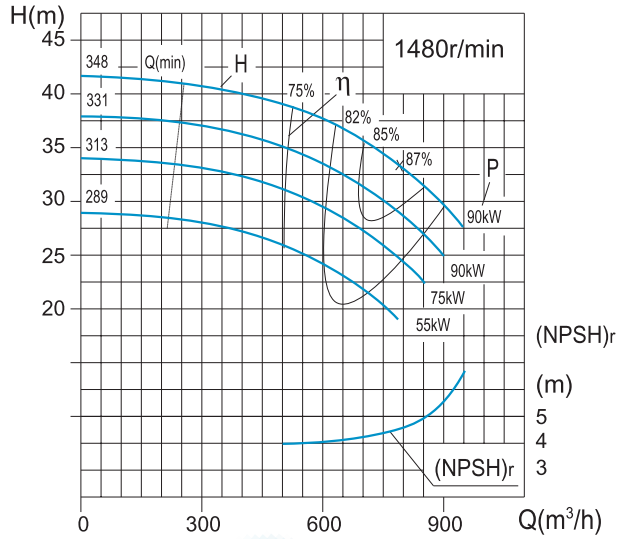

CW300-250A

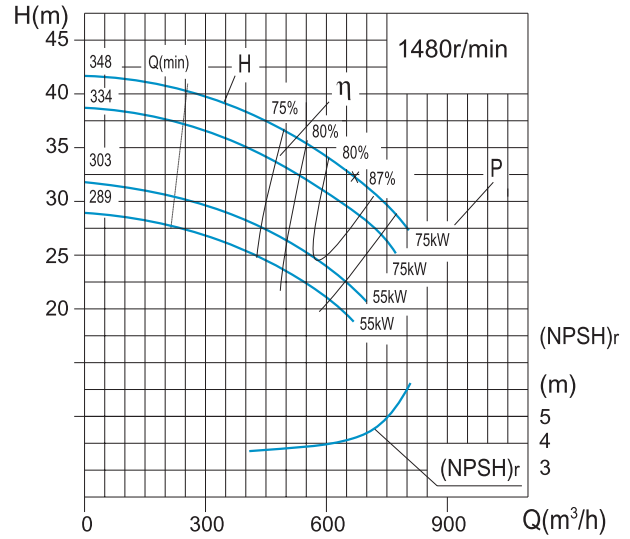


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW300-250	348	474	131.7	40	1480	72.0	90	71	4.6	716
		790	219.4	34		84.1		87		
		948	263.3	28		85.9		83		
	331	450	125.1	36	1480	62.6	90	70	4.5	714
		751	208.5	30		71.5		86		
		901	250.2	25		74.5		82		
	313	427	118.5	32	1480	54.0	75	69	4.3	712
		711	197.5	27		61.5		85		
		853	237.0	22		64.1		81		
	289	393	109.3	27	1480	43.0	55	68	4.1	710
		656	182.1	23		48.8		84		
		787	218.6	19		50.9		80		
CW300-250A	348	402	111.7	38	1480	65.7	75	64	4.2	715
		670	186.2	33		69.0		87		
		804	223.4	27		72.1		82		
	334	386	105.0	35	1480	59.0	75	63	4.0	713
		644	175.0	30		61.8		86		
		772	210.0	25		64.6		81		
	303	350	98.3	29	1480	44.6	55	62	3.8	711
		583	163.9	25		46.5		85		
		700	196.6	20		48.7		80		
	289	334	92.7	26	1480	39.4	55	61	3.7	709
		556	154.5	23		40.9		84		
		668	185.5	19		42.8		79		

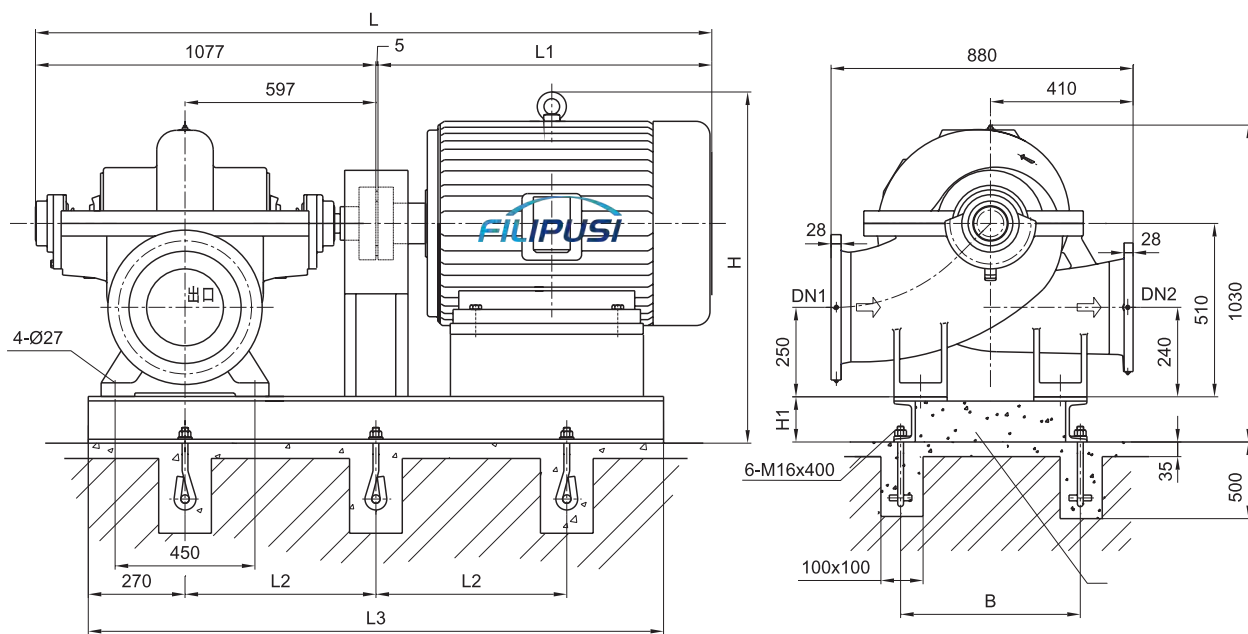


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)							重量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	H1	电机 Motor	底座 Baseplate
CW300-250/250A	280M-4	380		90	2132	1050	600	1720	560	1030	160	600	300
	280S-4	380		75	2082	1000	600	1670	560	1030	160	510	297
	250M-4	380		55	2012	930	530	1620	560	975	140	385	296


CW300-250

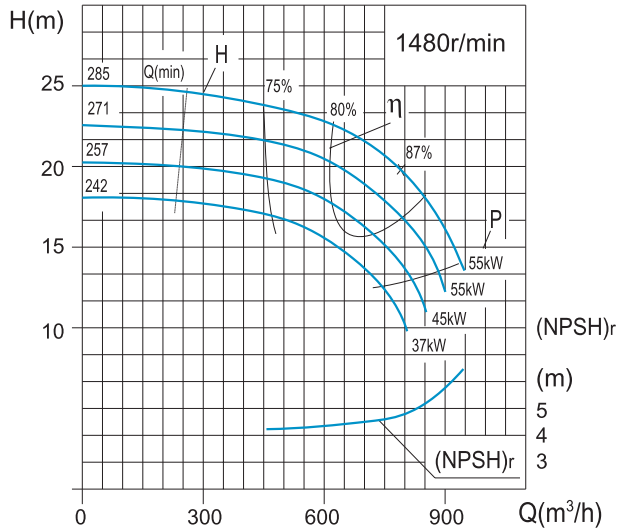



CW300-250A

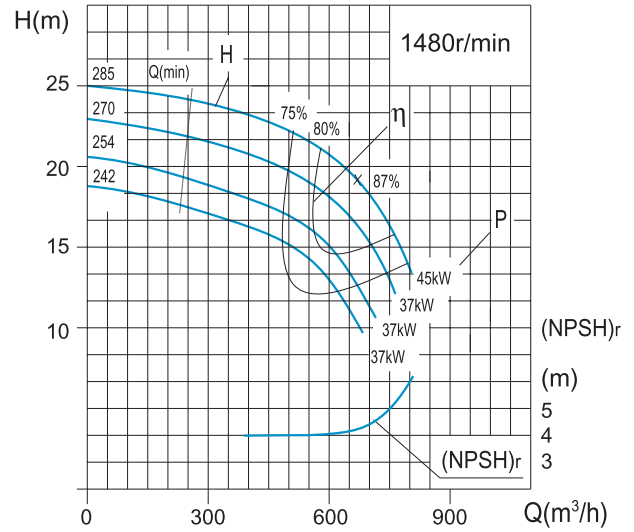




泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (KW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW300-250	285	474	131.7	24	1480	40.2	55	77	4.6	438
		790	219.4	20		48.9		87		
		948	263.3	14		43.7		80		
	271	450	125.1	22	1480	35.8	55	74	4.5	436
		751	208.5	18		43.5		84		
		901	250.2	12		38.9		77		
	257	427	118.5	19	1480	31.8	45	71	4.3	434
		711	197.5	16		38.3		81		
		853	237.0	11		34.4		74		
	242	403	111.9	17	1480	27.9	37	68	4.2	432
		672	186.5	14		33.5		78		
		806	223.8	10		30.2		71		
CW300-250A	285	402	111.7	23	1480	36.7	45	69	4.2	437
		670	186.2	19		40.2		87		
		804	223.4	13		36.7		79		
	271	382	108.4	20	1480	31.4	37	66	4.1	435
		637	180.6	16		33.0		84		
		764	216.7	12		32.8		76		
	254	358	101.7	18	1480	28.3	37	63	3.9	433
		597	169.4	15		30.4		81		
		716	203.3	11		28.0		73		
	242	342	95.0	17	1480	25.9	37	60	3.7	431
		570	158.3	14		27.5		78		
		684	189.9	10		25.4		70		

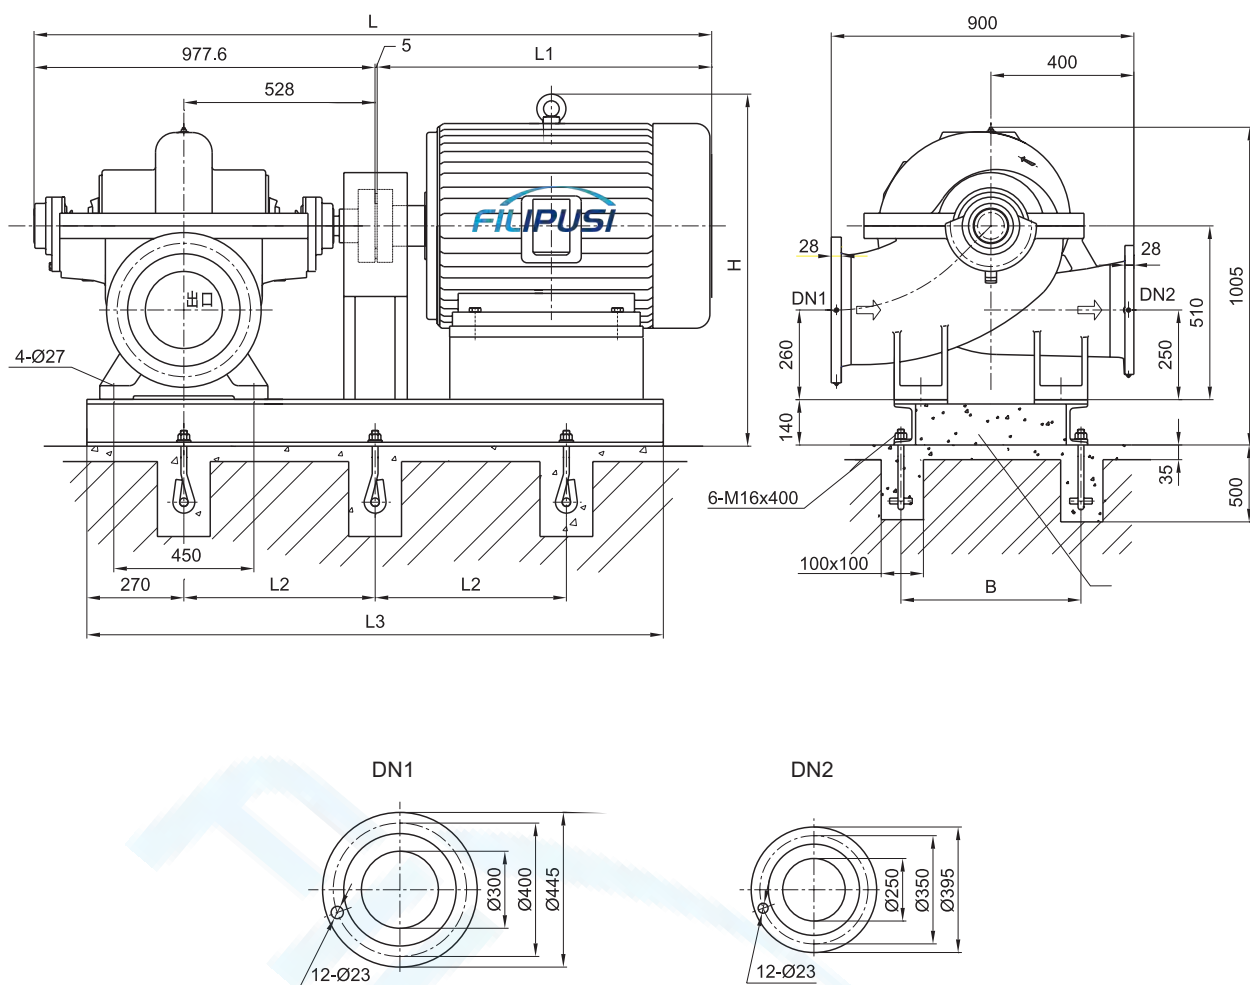

泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)						重量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	电机 Motor	底座 Baseplate
CW300-250/250A	250M-4	380		55	1915	930	530	1540	560	975	385	220
	225M-4	380		45	1830	845	450	1440	560	975	322	215
	225S-4	380		37	1805	820	450	1440	560	975	287	215

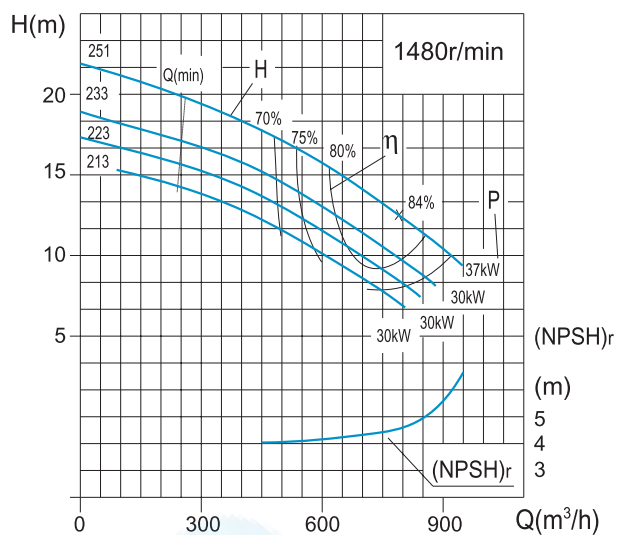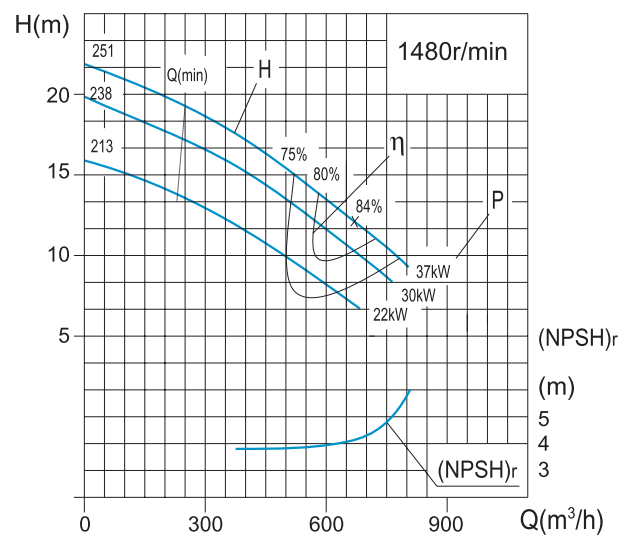
CW300-300

CW300-300A

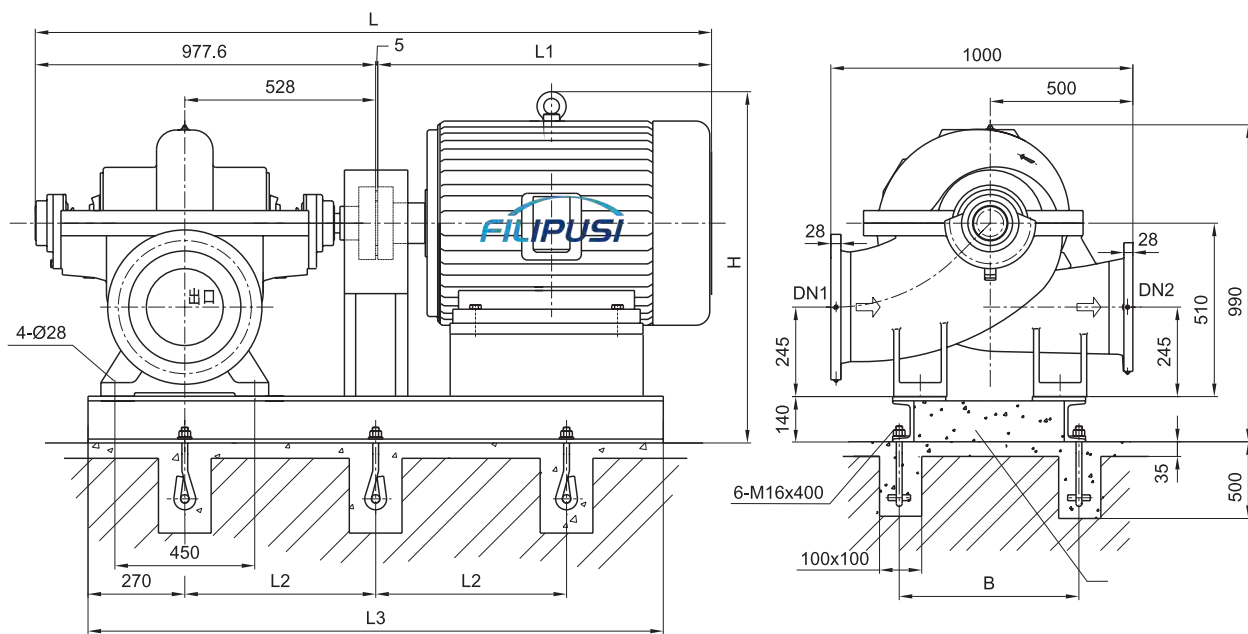
泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW300-300	251	474	131.7	18	1480	32.7	37	70	4.6	436
		790	219.4	13		32.0		84		
		948	263.3	10		32.3		80		
	233	441	122.5	15	1480	27.0	30	68	4.4	434
		735	204.1	11		26.4		82		
		882	244.9	8		25.0		78		
	223	422	117.2	14	1480	24.4	30	66	4.3	433
		703	195.3	10		23.7		80		
		844	234.4	7		22.5		76		
	213	403	111.9	13	1480	21.9	30	64	4.2	432
		672	186.5	9		21.2		78		
		806	223.8	7		20.1		74		
CW300-300A	251	402	111.7	17	1480	29.8	37	63	4.2	435
		670	186.2	12		26.3		84		
		804	223.4	10		27.1		79		
	238	382	106.1	15	1480	26.4	30	61	4.0	434
		637	176.9	11		23.1		82		
		764	212.3	9		23.8		77		
	213	342	100.6	12	1480	19.5	22	59	3.9	431
		570	167.6	9		17.0		80		
		684	201.1	7		17.5		75		




泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)						重量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	电机 Motor	底座 Baseplate
CW300-300/300A	225S-4	380		37	1802	820	450	1440	560	955	287	210
	200L-4	380		30	1757	775	450	1410	560	925	232	208
	180L-4	380		22	1692	710	450	1370	560	900	181	206

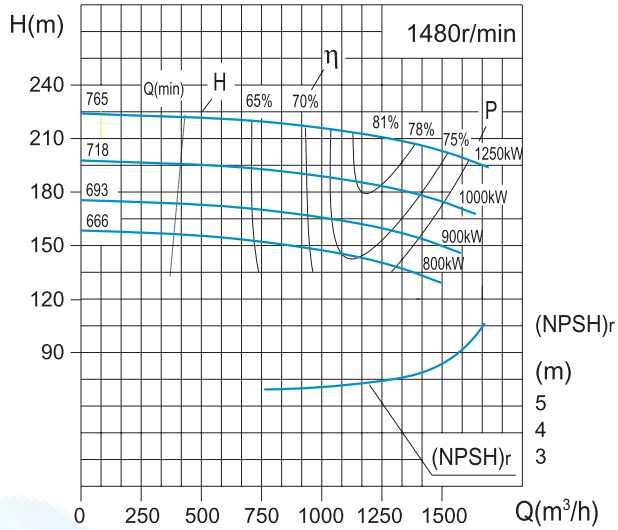
CW350-250



CW350-250A

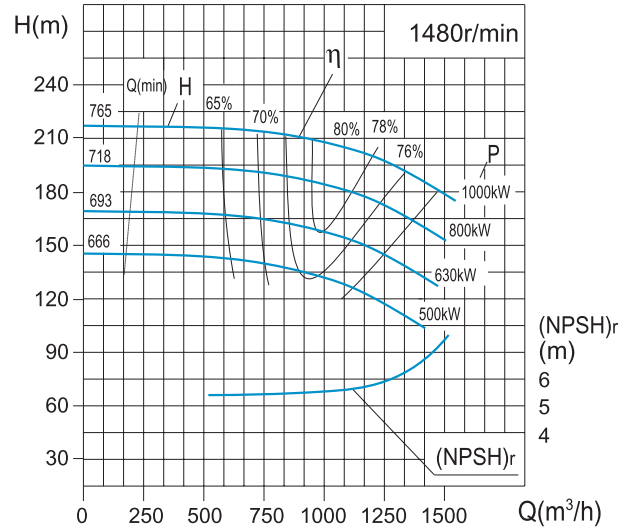


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (KW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW350-250	765	756	210.0	220	1480	686.3	1250	66	5.9	1998
		1260	350.0	210		889.6		81		
		1660	461.1	192		1157.3		75		
	718	733	203.7	195	1480	599.1	1000	65	5.7	1993
		1222	339.5	185		769.7		80		
		1610	447.3	163		965.9		74		
	693	703	195.3	172	1480	514.6	900	64	5.5	1988
		1172	325.5	163		658.4		79		
		1544	428.8	145		835.1		73		
	666	673	186.9	157	1480	456.6	800	63	5.2	1983
		1121	311.5	147		575.5		78		
		1477	410.4	130		726.5		72		
CW350-250A	765	641	178.2	218	1480	577.0	1000	66	5.6	1995
		1069	297.0	207		753.4		80		
		1380	391.3	183		929.4		74		
	718	616	106.1	194	1480	500.5	800	65	5.4	1990
		1026	176.9	182		643.9		79		
		1325	212.3	155		766.0		73		
	693	590	100.6	170	1480	426.9	630	64	5.2	1985
		984	167.6	158		542.6		78		
		1270	201.1	131		629.1		72		
	666	520	144.3	143	1480	321.3	500	63	4.9	1980
		866	240.6	135		413.5		77		
		1141	316.9	110		481.4		71		

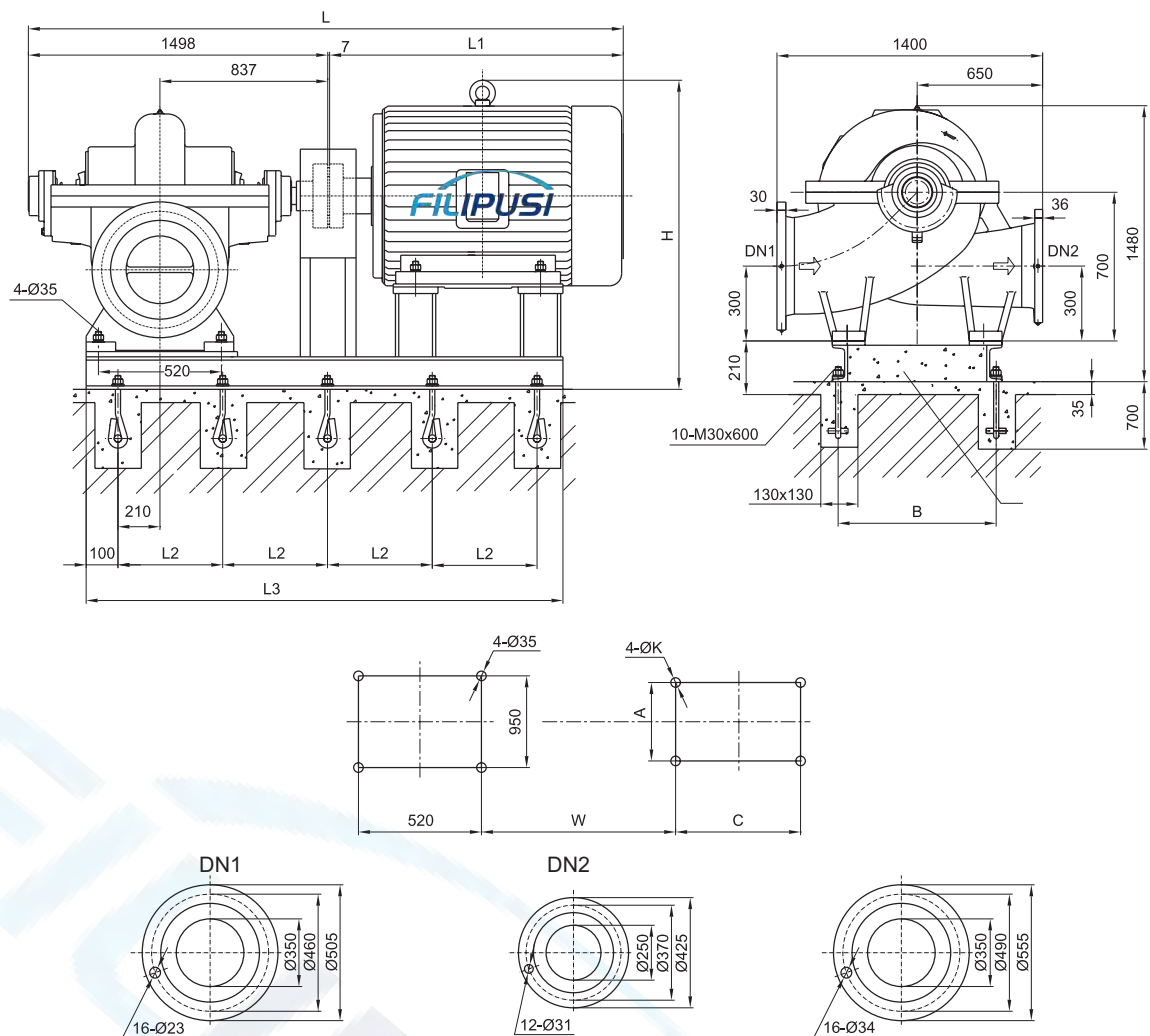


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)										重量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	W	A	C	K	电机 Motor	底座 Baseplate
CW350-250/250A	500-4	6000		1250/1000	4055	2550	760	3330	1100	2065	1309	900	1250	42	4600	682
	450-4	6000		900/800	3685	2180	730	3125	960	1935	1149	800	1120	35	3300	691
	450-4	6000		630	3685	2180	730	3125	960	1935	1149	800	1120	35	3180	691
	400-4	6000		500	3485	1980	690	2970	960	1840	1129	710	1000	35	2520	710
	560-4	10000		1250	3905	2400	780	3425	1150	2100	1334	1000	1400	42	5560	738
	500-4	10000		1000/900	3725	2220	760	3235	1100	1460	1269	900	1250	42	5250	733
	500-4	10000		800/710	3725	2220	760	3235	1100	1460	1269	900	1250	42	4500	733
	450-4	10000		630/500	3555	2050	730	3125	960	1410	1149	800	1120	35	3900	781


CW350-200

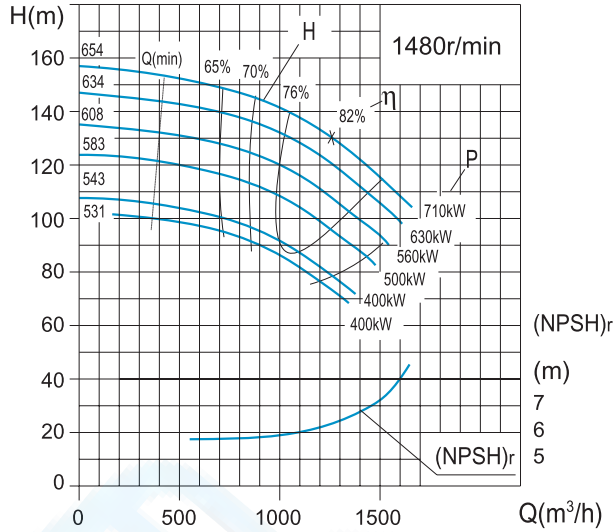

CW350-200A

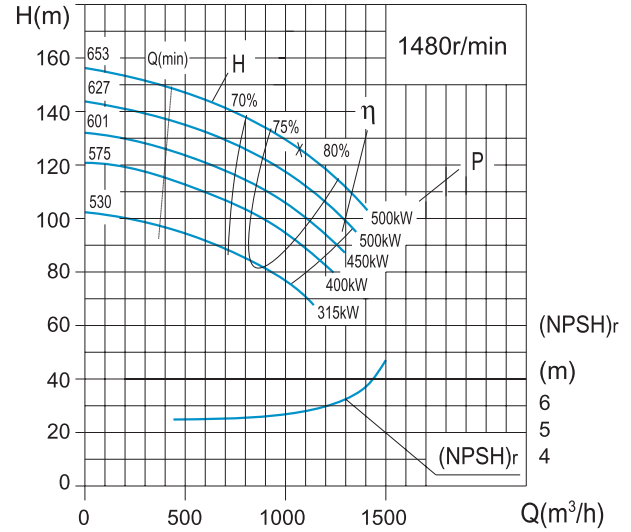


泵型号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (KW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW350-200	654	756	210.0	148	1480	461.5	710	66	6.3	1586
		1260	350.0	126		527.3		82		
		1660	461.1	106		630.5		76		
	634	733	203.7	139	1480	427.7	630	65	6.2	1584
		1222	339.5	120		493.1		81		
		1610	447.5	98		573.1		75		
	608	703	195.3	128	1480	382.8	560	64	6.0	1582
		1172	325.5	110		438.8		80		
		1544	428.8	90		511.9		74		
	583	673	186.9	117	1480	340.8	500	63	5.9	1580
		1121	311.5	103		398.8		79		
		1477	410.4	83		454.8		73		
	543	627	174.3	102	1480	285.5	400	61	5.6	1578
		1046	290.5	88		325.5		77		
		1378	382.7	72		379.3		71		
	531	612	170.1	97	1480	269.8	400	60	5.5	1576
		1021	283.5	85		312.5		76		
		1345	373.5	68		357.6		70		
CW350-200A	653	641	178.2	143	1480	421.1	500	59	5.7	1585
		1069	297.0	121		429.6		82		
		1380	391.3	95		474.5		75		
	627	616	171.1	132	1480	385.5	500	57	5.5	1583
		1026	285.0	112		389.6		80		
		1325	368.1	88		431.3		73		
	601	590	163.9	121	1480	345.3	450	56	5.3	1581
		984	273.3	102		347.3		79		
		1270	352.8	80		384.8		72		
	575	565	152.4	111	1480	313.3	400	54	5.1	1579
		941	253.9	94		311.8		77		
		1214	334.5	74		346.4		70		
	530	520	144.3	94	1480	253.7	315	52	4.9	1575
		865	240.6	79		248.4		75		
		1141	316.9	65		295.7		68		

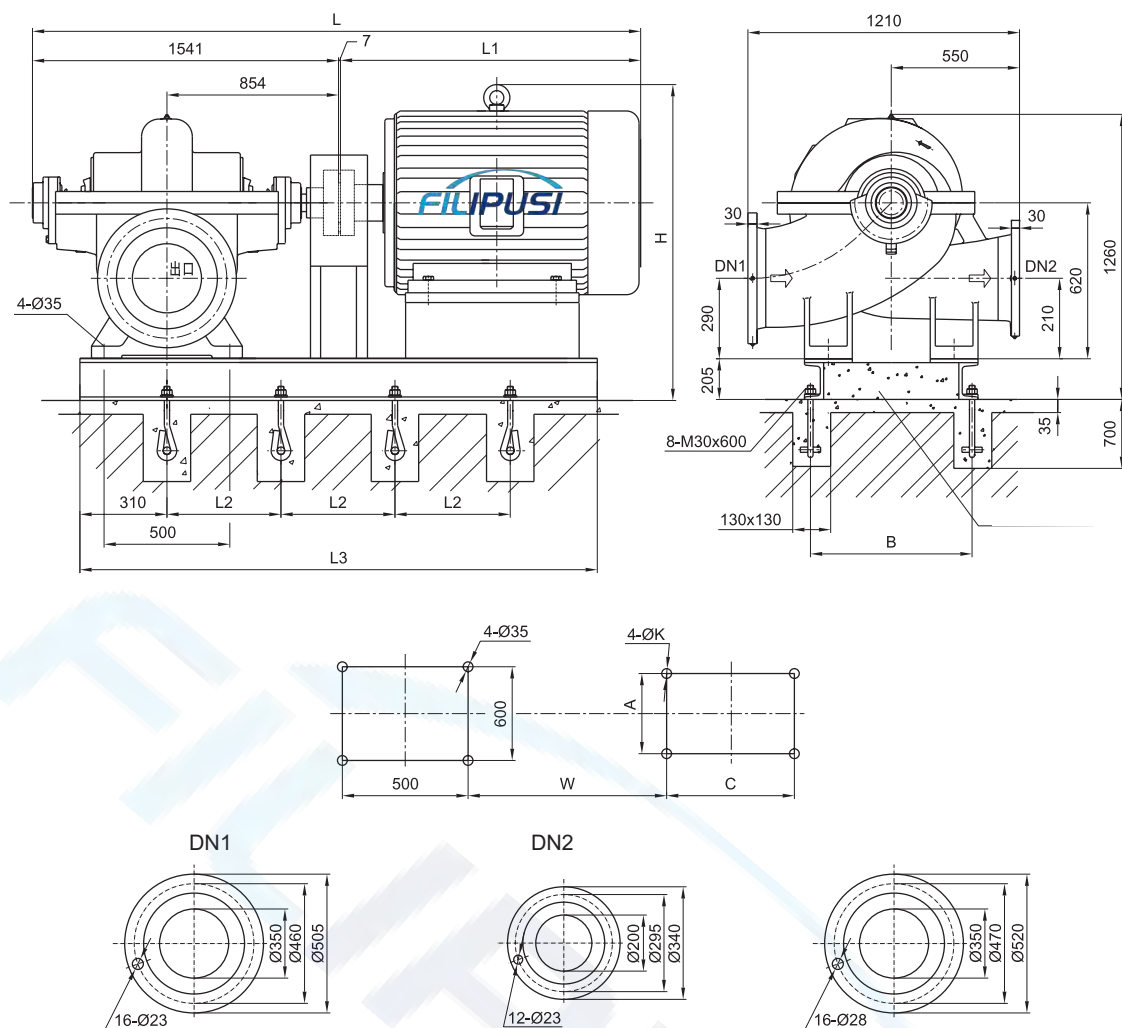


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)										重量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	W	A	C	K	电机 Motor	底座 Baseplate
CW350-200/200A	355M-4	380		315	3168	1620	580	2305	700	1590	1075	610	560	28	1530	626
	450-4	6000		710/630	3628	2080	850	3170	880	1310	1176	800	1120	35	3210	642
	400-4	6000		560~355	3488	1940	800	3000	800	1260	1156	710	1000	35	2620	638
	355-4	6000		315	3438	1890	720	2850	740	1640	1136	630	900	28	1860	625
	500-4	10000		710	3748	2200	900	3250	1050	1375	1296	900	1250	42	4550	650
	450-4	10000		630~315	3598	2050	840	3100	920	1325	1176	800	1120	35	3460	675
	400L-4	380		500	3438	1890	700	2710	750	1260	1101	686	710	35	3200	632
	400M-4	380		450/400	3438	1890	700	2710	750	1505	1101	686	630	35	3100	632
	400S-4	380		355	3438	1890	700	2710	750	1505	1101	686	630	35	2900	628
	355L-4	380		315	3078	1530	580	2305	700	1480	1035	610	630	28	1870	626


CW350-250

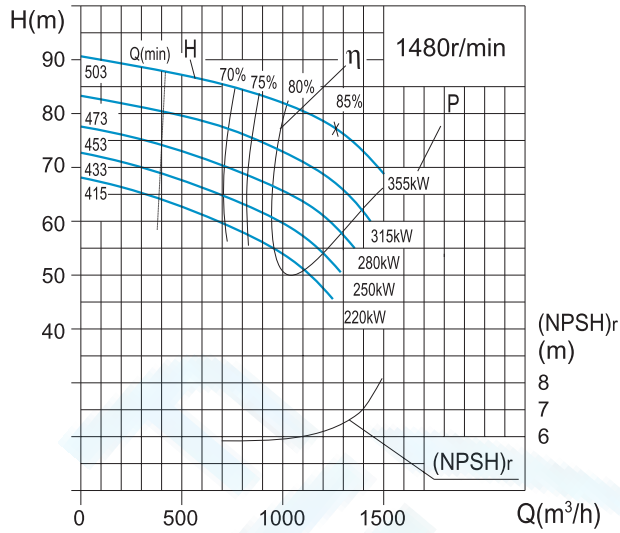

CW350-250A

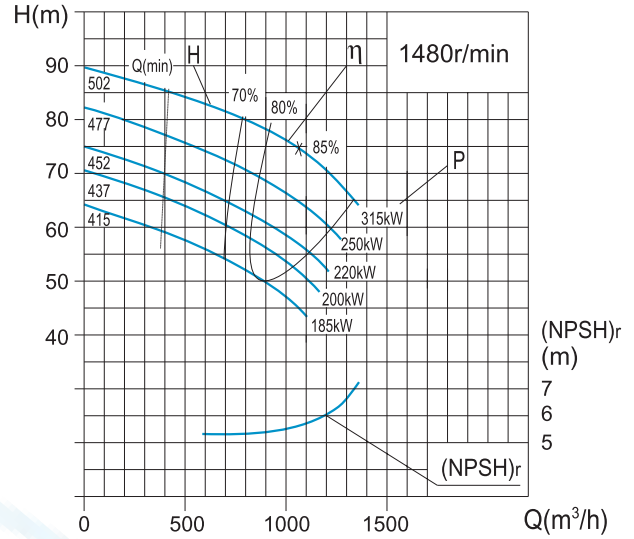


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW350-250	503	756	210.0	86	1480	252.9	355	70	6.3	1208
		1260	350.0	77		310.8		85		
		1512	420.0	68		345.7		81		
	473	711	197.4	77	1480	216.0	315	69	6.1	1206
		1184	329.0	69		265.1		84		
		1421	394.8	61		295.1		80		
	453	680	189.0	71	1480	193.5	280	68	5.9	1204
		1134	315.0	63		235.5		83		
		1361	378.0	55		258.0		79		
	433	650	180.6	62	1480	164.9	250	67	5.7	1202
		1084	301.0	58		208.0		82		
		1300	361.2	52		236.1		78		
	415	624	173.3	57	1480	147.8	220	66	5.6	1200
		1040	288.8	53		185.9		81		
		1247	346.5	46		202.9		77		
CW350-250A	502	641	178.2	83	1480	230.2	315	63	5.7	1207
		1069	297.0	74		253.5		85		
		1283	356.4	67		291.9		80		
	477	609	106.1	75	1480	203.8	250	61	5.5	1205
		1016	176.9	66		219.9		83		
		1219	212.3	59		249.6		78		
	452	577	100.6	67	1480	176.2	220	60	5.3	1203
		962	167.6	59		188.5		82		
		1155	201.1	53		215.9		77		
	437	558	152.4	63	1480	162.3	200	59	5.2	1201
		940	253.9	56		177.0		81		
		1116	334.5	50		199.5		76		
	415	529	147.0	56	1480	140.4	185	58	5.0	1199
		882	245.0	50		151.2		80		
		1058	294.0	46		174.8		75		

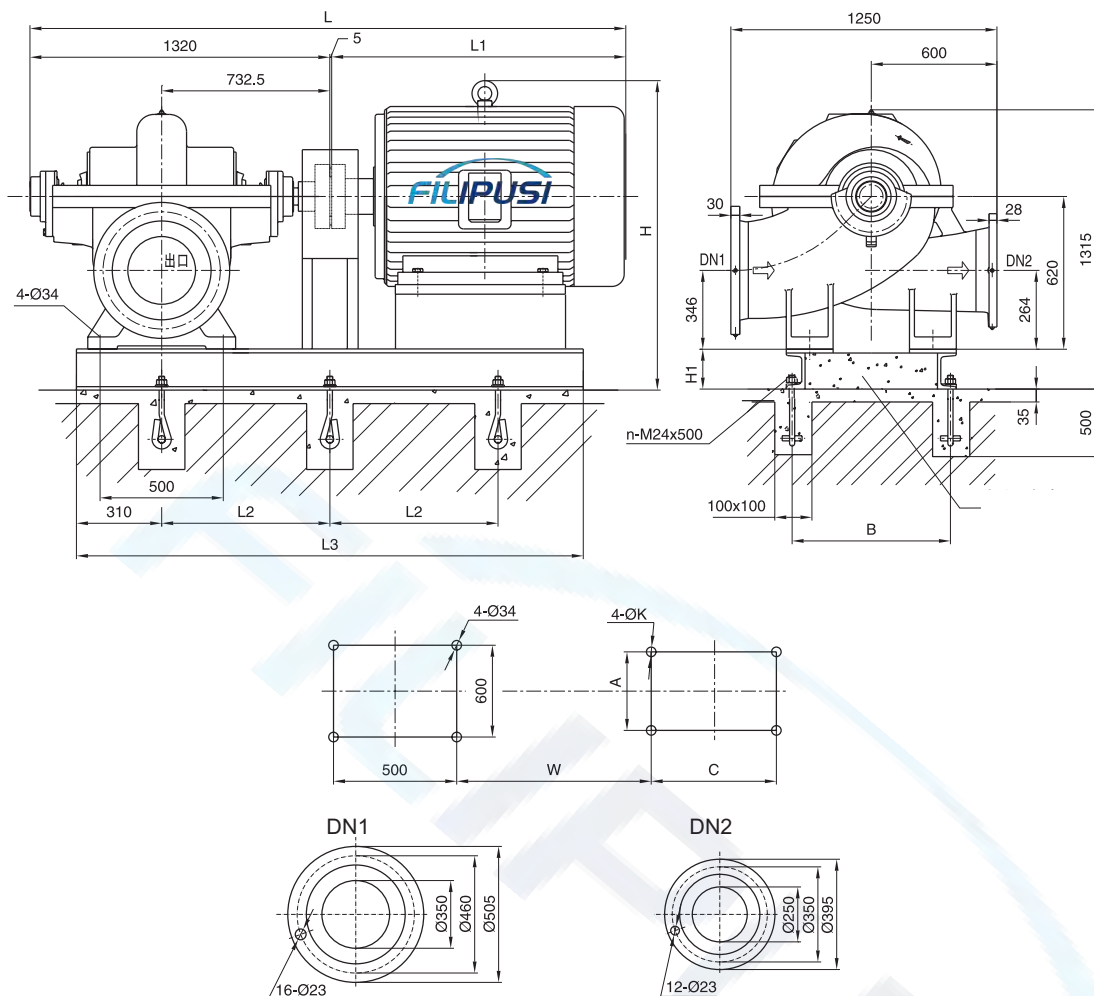


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)												重量 Weight (kg)	地脚 数量
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	H1	W	A	C	K	电机 Motor	底座 Baseplate	n (个)
CW350-250/250A	355L ₁ -4	380		355	3015	1690	800	2220	700	1590	205	951.5	610	630	28	1630	522	6
	355M-4	380		315/280	2945	1620	800	2220	700	1590	205	951.5	610	560	28	1530	522	6
	315M-4	380		250~185	2595	1270	680	1995	620	1570	185	873.5	508	457	28	1075	520	6
	400-4	6000		355	3305	1980	750	2880	840	1755	205	1032.5	710	1000	35	2280	560	8
	355-4	6000		315	3215	1890	700	2750	740	1640	205	1012.5	630	900	28	1860	550	8
	355-4	6000		280~200	3215	1890	700	2750	740	1640	205	1012.5	630	900	28	1800	550	8
	450-4	10000		355~200	3375	2050	800	3000	920	1325	205	1052.5	800	1120	35	2850	585	8
	400S-4	380		355	3245	1920	680	2590	750	1624	205	978	686	630	35	2330	530	8
	355L-4	380		315/280	2895	1570	800	2220	700	1500	205	911.5	610	630	28	1870	522	6
	355M-4	380		250/220	2895	1570	800	2145	700	1500	205	911.5	610	560	28	1720	518	6
	315L-4	380		200/185	2665	1340	680	2040	620	1355	185	873.5	508	508	28	1170	521	6


CW350-300

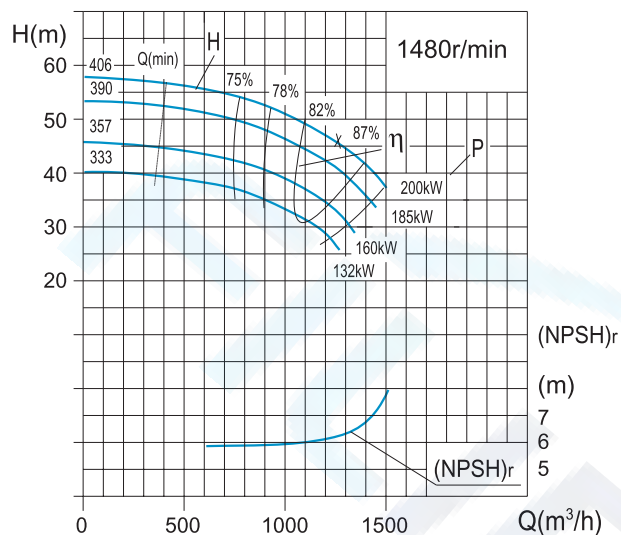

CW350-300A

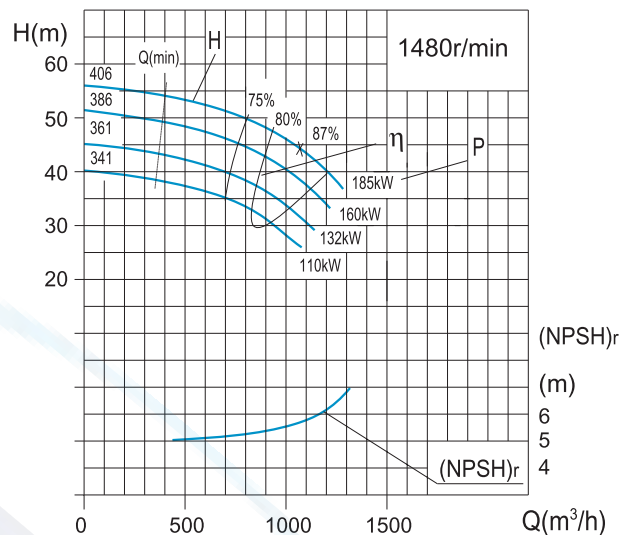


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW350-300	406	756	210.0	54	1480	148.7	200	75	6.3	1110
		1260	350.0	46		180.8		87		
		1512	420.0	38		197.9		80		
	390	726	201.6	50	1480	133.3	185	74	6.2	1108
		1210	336.0	42		161.8		86		
		1452	403.2	34		168.1		79		
	357	665	184.8	42	1480	105.6	160	72	5.8	1106
		1109	308.0	35		127.6		84		
		1331	369.6	28		132.9		77		
	333	620	172.2	36	1480	87.9	132	70	5.6	1105
		1033	287.0	31		105.8		82		
		1240	344.4	25		110.4		75		
CW350-300A	406	641	178.2	52	1480	135.7	185	68	5.7	1109
		1069	297.0	44		148.5		87		
		1283	356.4	38		166.2		79		
	386	609	174.6	47	1480	118.1	160	67	5.6	1107
		1016	291.0	40		128.8		86		
		1219	349.3	34		144.3		78		
	361	571	162.2	42	1480	100.1	132	65	5.3	1105
		952	270.3	35		108.4		84		
		1142	324.3	30		121.8		76		
	341	539	149.7	37	1480	86.9	110	63	5.1	1104
		898	249.5	31		93.4		82		
		1078	299.4	27		105.1		74		

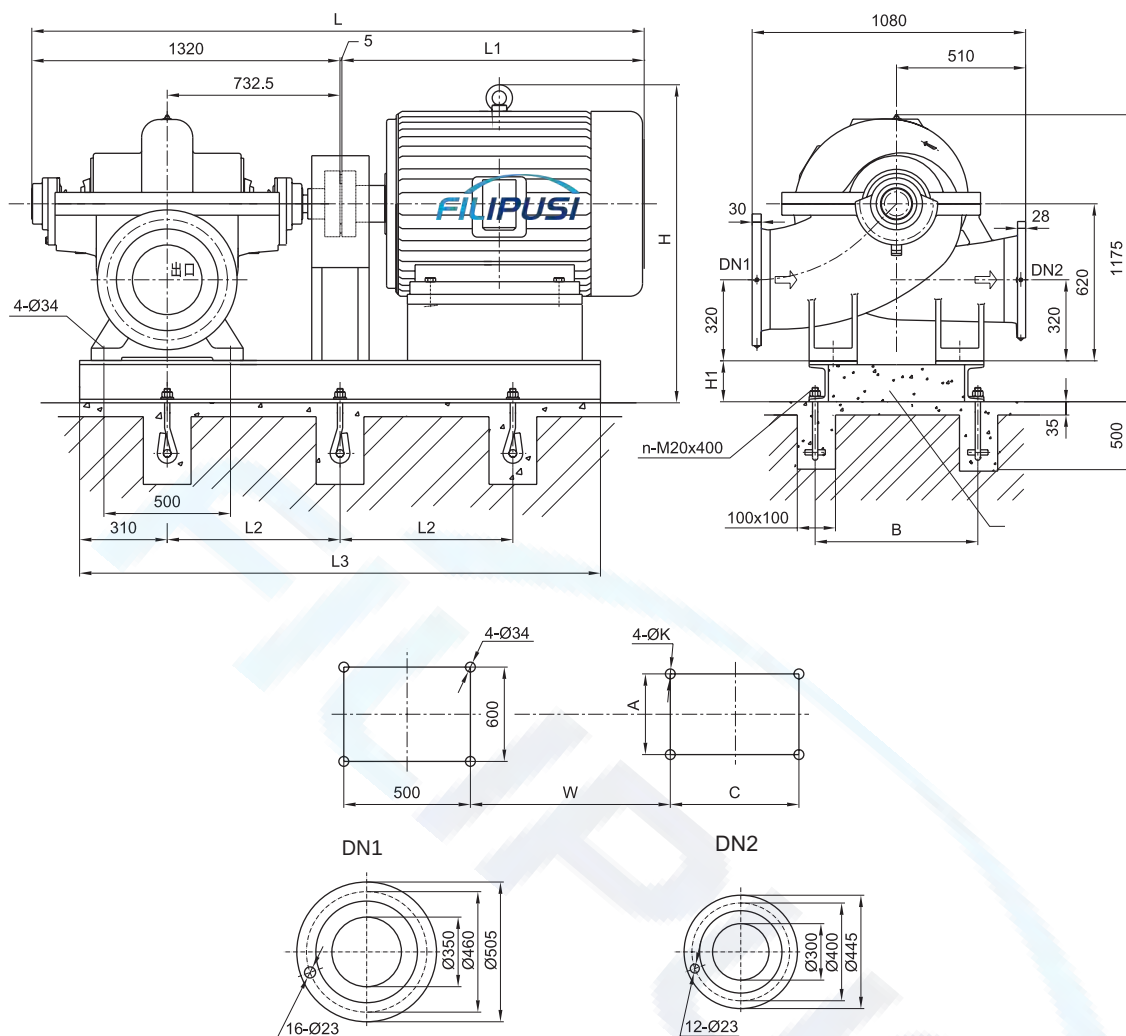


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)												重量 Weight (kg)	地脚 个数
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	H1	W	A	C	K	电机 Motor	底座 Baseplate	n (个)
CW350-300/300A	315M-4	380		200/185	2595	1270	680	1995	620	1335	185	873.5	508	457	28	990	440	6
	315S-4	380		160	2485	1160	680	1945	620	1335	185	873.5	508	406	28	870	438	6
	280M-4	380		132/110	2465	1140	580	1945	620	1225	165	847.5	457	419	24	820	440	6
	355-4	6000		200	3215	1890	700	2750	740	1620	185	1012.5	630	900	28	1710	548	8
	450-4	10000		200	3375	2050	800	3000	920	1305	185	1052.5	800	1120	35	2550	575	8
	315L-4	380		200~160	2665	1340	680	2065	620	1270	185	873.5	508	508	28	1170	443	6
	315M-4	380		132	2665	1340	680	1995	620	1270	185	873.5	508	457	28	1010	441	6
	315S-4	380		110	2595	1270	680	1945	620	1270	185	873.5	508	406	28	930	439	6



CW350-300

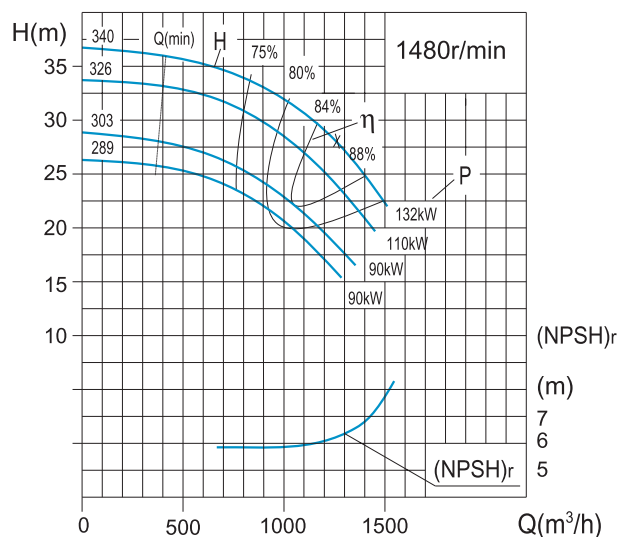

CW350-300A

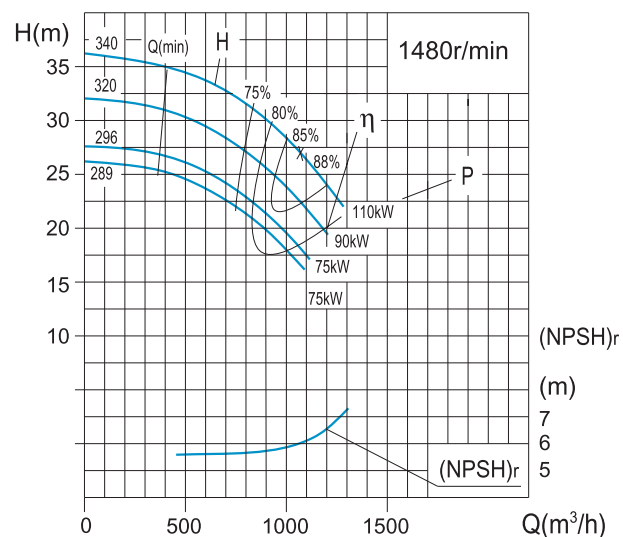


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW350-300	340	756	210.0	35	1480	98.7	132	73	6.3	678
		1260	350.0	28		109.2		88		
		1512	420.0	22		111.8		81		
	326	726	201.6	32	1480	88.2	110	71	6.2	676
		1210	336.0	25		95.6		86		
		1452	403.2	20		98.5		79		
	303	673	186.9	27	1480	72.3	90	69	5.9	674
		1121	311.5	21		78.0		84		
		1346	373.8	17		80.5		77		
	289	643	178.5	25	1480	64.9	90	67	5.7	672
		1071	297.5	20		69.6		82		
		1285	357.0	15		72.0		75		
CW350-300A	340	641	178.2	34	1480	90.1	110	66	5.7	677
		1069	297.0	27		89.7		88		
		1283	356.4	22		93.9		80		
	320	603	169.3	30	1480	77.2	90	64	5.5	675
		1005	282.1	24		76.2		86		
		1206	338.6	19		80.0		78		
	296	558	160.4	26	1480	63.2	75	62	5.3	673
		930	267.3	21		61.9		84		
		1116	320.7	16		65.1		76		
	289	545	151.5	24	1480	60.9	75	60	5.1	671
		909	252.4	20		59.1		82		
		1091	302.9	16		62.4		74		

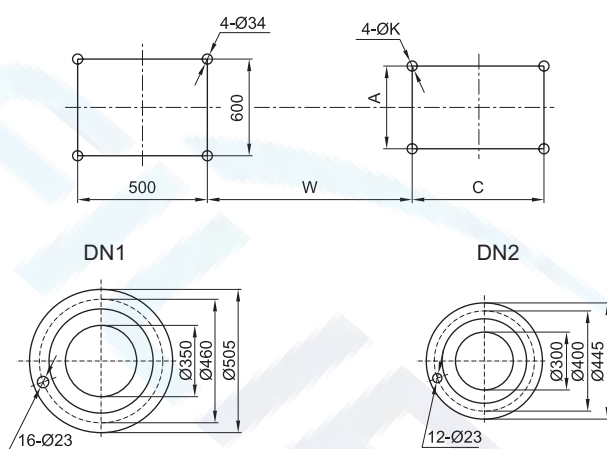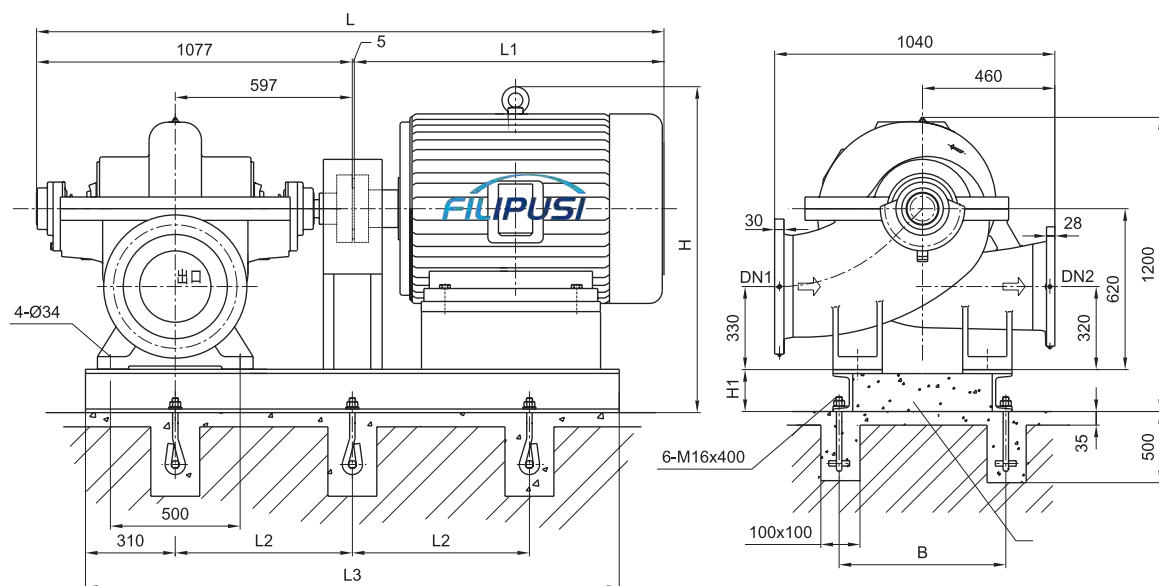


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)												重量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	H1	W	A	C	K	电机 Motor	底座 Baseplate	
CW350-300/300A	280M-4	380		132/110	2222	1140	580	1840	620	1290	165	712	457	419	24	820	411	
	315M-4	380		132	2380	1290	680	1890	620	1355	185	738	508	457	28	1010	410	
	315S-4	380		110	2330	1240	680	1840	620	1355	185	738	508	406	28	930	408	
	280M-4	380		90	2140	1050	580	1770	620	1145	165	682	457	419	24	600	403	
	280S-4	380		75	2090	1000	580	1720	620	1145	165	682	457	368	24	510	403	


CW350-350

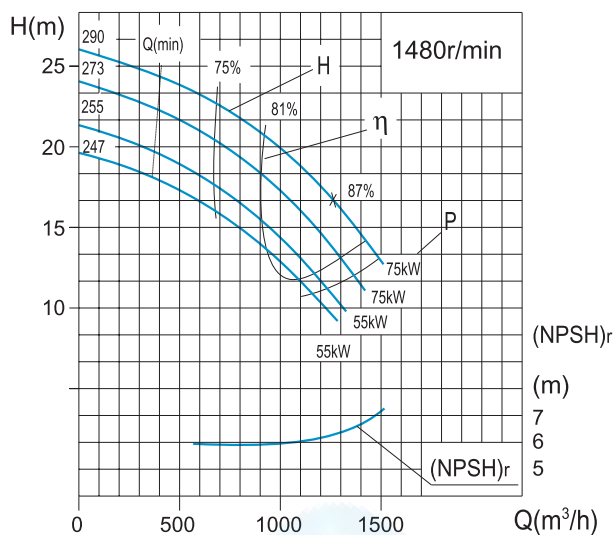

CW350-350A

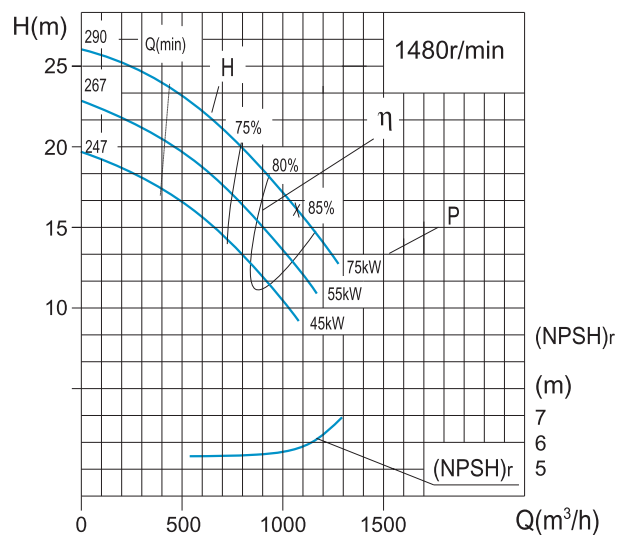


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW350-350	290	756	210.0	23	1480	60.5	75	78	6.3	637
		1260	350.0	17		65.7		87		
		1512	420.0	14		74.8		77		
	273	711	197.4	20	1480	51.6	75	76	6.1	635
		1184	329.0	15		55.9		85		
		1421	394.8	11		58.0		75		
	255	665	184.8	18	1480	44.1	55	73	5.8	634
		1109	308.0	13		47.5		82		
		1331	369.6	10		49.5		72		
	247	643	178.5	17	1480	40.2	55	72	5.7	633
		1071	297.5	12		43.4		81		
		1285	357.0	9		45.3		71		
CW350-350A	290	641	178.2	22	1480	55.2	75	70	5.7	636
		1069	297.0	16		54.0		87		
		1283	356.4	14		62.9		76		
	267	590	169.3	19	1480	44.2	55	68	5.5	634
		984	282.1	14		43.0		85		
		1180	338.6	12		50.3		74		
	247	545	156.8	16	1480	36.5	45	65	5.2	632
		909	261.3	12		35.2		82		
		1091	313.6	10		41.3		71		

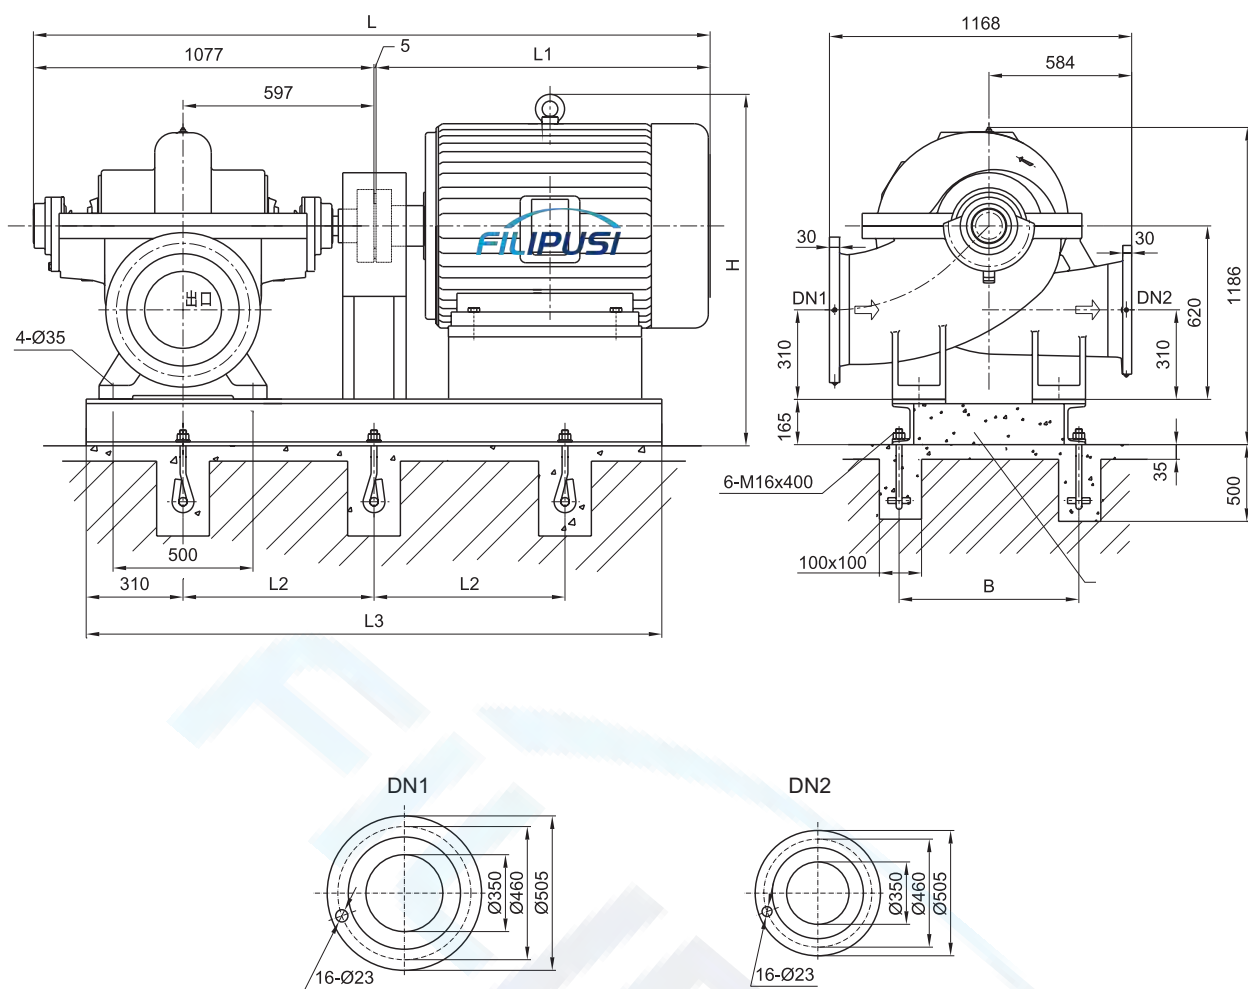


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)										重量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	W	A	C	K	电机 Motor	底座 Baseplate
CW350-350/350A	280S-4	380		75	2082	1000	580	1720	620	1073	682	457	368	24	510	390
	250M-4	380		55	2012	930	510	1640	620	1100	660	406	349	24	385	388
	225M-4	380		45	1927	845	480	1580	620	1090	641	356	311	19	322	386

CW400-300

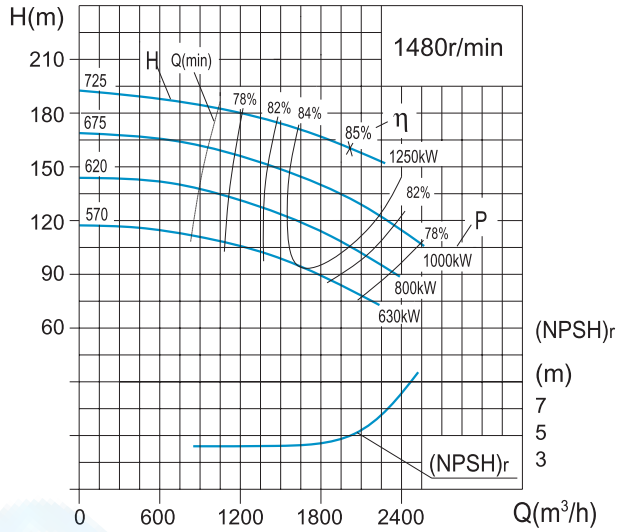


CW400-300A

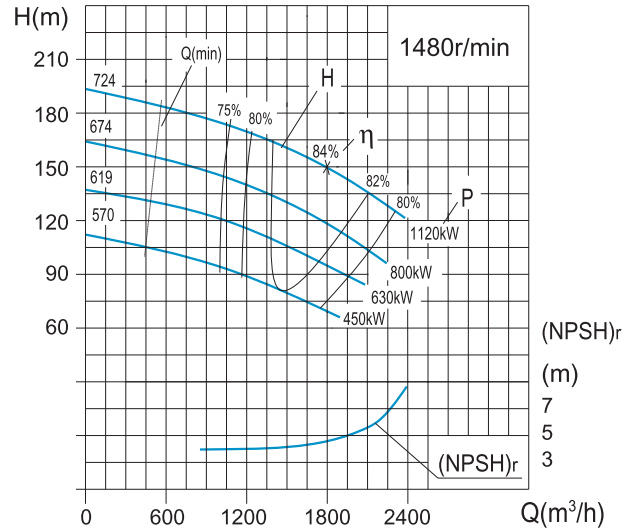


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW400-300	725	1211	336.3	180	1480	760.9	1250	78	5.0	1954
		2018	560.6	160		1034.5		85		
		2523	700.7	151		1234.9		84		
	675	1151	319.7	157	1480	630.8	1000	78	4.9	1950
		1918	523.8	137		841.9		85		
		2398	666.0	120		944.0		83		
	620	1019	303.0	130	1480	495.1	800	78	4.8	1946
		1818	505.0	111		654.2		84		
		2273	631.3	97		732.1		82		
	570	1025	284.7	108	1480	391.4	630	77	4.7	1943
		1708	474.4	91		503.9		84		
		2135	593.1	76		566.5		78		
CW400-300A	724	1079	299.7	176	1480	662.9	1120	78	4.8	1952
		1798	499.4	150		874.4		84		
		2248	624.3	134		1012.6		81		
	674	983	273.0	146	1480	514.2	800	76	4.7	1948
		1638	455.0	125		671.8		83		
		2048	568.8	108		743.5		81		
	619	929	258.0	123	1480	409.4	630	76	4.6	1944
		1548	430.0	105		533.3		83		
		1935	537.5	89		579.0		81		
	570	875	243.0	98	1480	315.5	450	74	4.5	1941
		1458	405.0	81		392.2		82		
		1823	506.3	68		421.9		80		



CW400-300

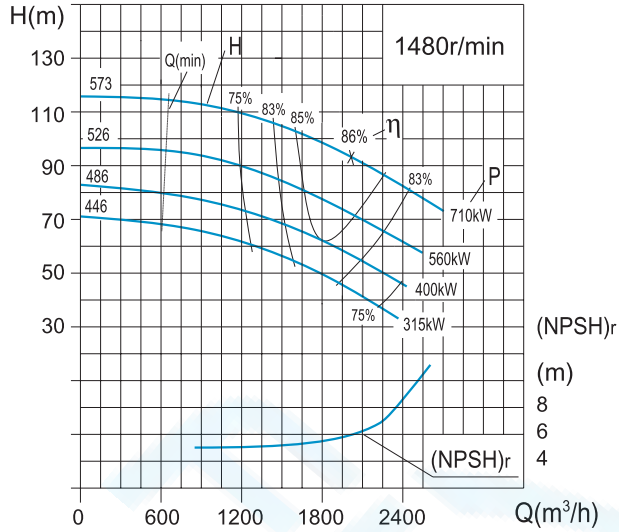

CW400-300A

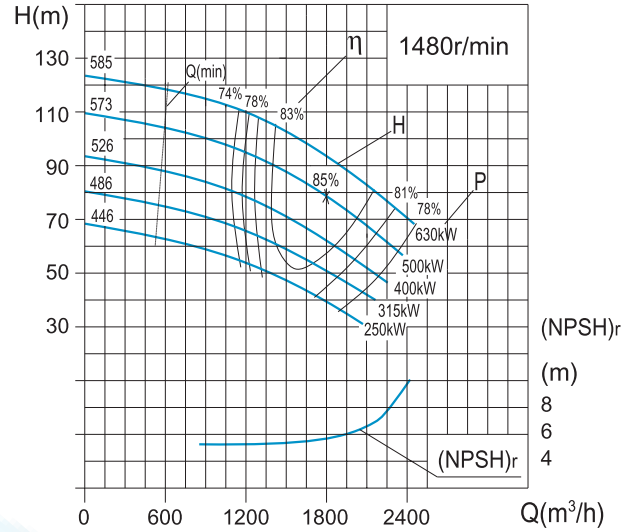


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW400-300	573	1211	336.3	107	1480	446.6	710	79	6.0	1730
		2018	560.6	94		600.7		86		
		2523	700.7	81		670.4		83		
	526	1123	312.0	89	1480	349.0	560	78	5.9	1728
		1872	520.0	77		461.8		85		
		2340	650.0	66		506.7		83		
	486	1075	298.7	74	1480	281.4	400	77	5.8	1725
		1792	497.8	63		361.7		85		
		2240	622.2	53		394.3		82		
	446	1045	290.3	62	1480	238.5	315	74	5.7	1723
		1742	483.9	51		291.5		83		
		2125	590.3	41		308.2		77		
CW400-300A	585	1110	308.3	112	1480	434.1	630	78	5.9	1730
		1850	513.9	92		545.3		85		
		2313	642.4	74		582.5		80		
	573	1039	288.7	96	1480	348.3	500	78	5.8	1728
		1732	481.1	80		443.9		85		
		2165	601.4	67		481.7		82		
	526	943	262.0	82	1480	277.1	400	76	5.7	1726
		1572	436.7	68		342.5		85		
		1965	545.8	58		378.5		82		
	486	901	250.3	70	1480	235.3	315	73	5.6	1724
		1502	417.2	59		290.8		83		
		1878	521.5	49		309.3		81		




泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)										重量 Weight (kg)		地脚数量
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	W	A	C	K	电机 Motor	底座 Baseplate	n (个)
CW400-300/300A	315M-4	380		250	2817	1270	900	2120	950	1523	986	508	457	28	1075	683	6
	355M-4	380		315	3167	1620	955	2315	950	1675	1064	610	560	28	1460	688	6
	450-4	6000		630~710	3697	2150	900	3170	950	1425	1165	800	1120	35	3210	716	8
	400-4	6000		560~400	3536	1989	860	3050	950	1440	1145	710	1000	35	2620	713	8
	355-4	6000		315~250	3437	1890	800	2860	950	1725	1125	630	900	28	1860	695	8
	500-4	10000		710	3747	2200	750	3260	1050	1460	1285	900	1250	42	4550	725	10
	450-4	10000		630~250	3597	2050	900	3130	950	1410	1165	800	1120	35	3380	715	8
	355L-4	380		315	3077	1530	955	2322	950	1590	1024	610	630	28	1870	689	6
	355M-4	380		250	3077	1530	955	2322	950	1590	1024	610	560	28	1720	687	6


CW400-300

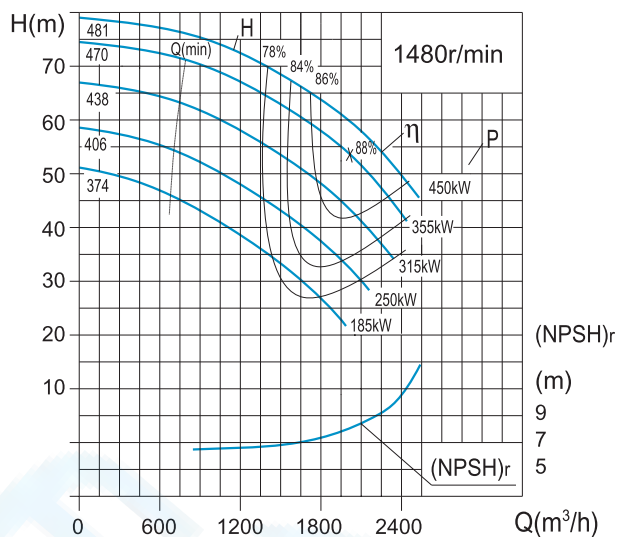

CW400-300A

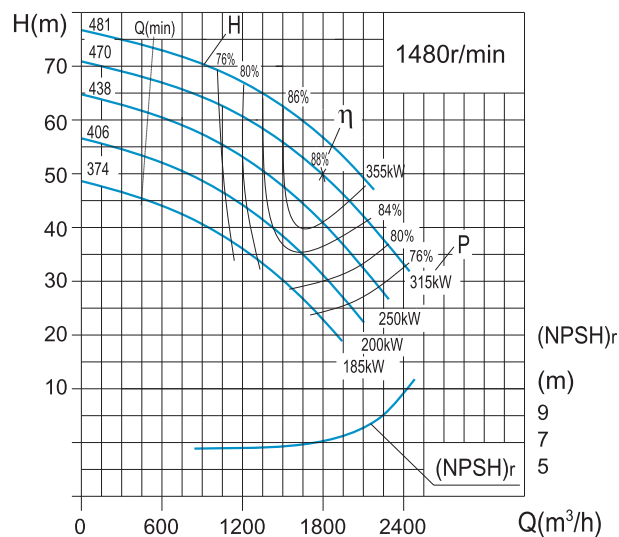


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW400-300	481	1215	337.5	71	1480	313.2	450	75	7.3	1652
		2025	562.5	59		374.0		87		
		2520	700.0	51		416.7		84		
	470	1211	336.3	65	1480	282.0	355	76	7.2	1650
		2018	560.6	52		324.7		88		
		2502	695.1	43		344.7		85		
	438	1148	319.0	57	1480	240.9	315	74	7.1	1647
		1914	531.7	45		272.7		86		
		2393	664.6	37		290.5		83		
	406	1082	300.7	47	1480	189.8	250	73	7.0	1642
		1804	501.1	37		216.4		84		
		2255	626.4	27		215.3		77		
	374	1016	282.3	38	1480	146.1	185	72	6.9	1640
		1694	470.6	28		161.5		80		
		2118	588.2	20		155.9		74		
CW400-300A	481	1047	290.8	68	1480	255.1	355	76	7.0	1650
		1745	484.7	57		311.3		87		
		2181	605.9	47		340.5		82		
	470	1039	288.7	63	1480	231.6	315	77	7.0	1648
		1732	481.1	52		277.6		88		
		2165	601.4	41		284.4		85		
	438	979	272.0	56	1480	199.1	250	75	6.9	1646
		1632	453.3	45		229.9		87		
		2040	566.7	34		233.2		81		
	406	922	256.2	48	1480	165.1	200	73	6.8	1641
		1537	426.9	38		189.4		84		
		1921	533.7	29		189.7		80		
	374	859	238.7	39	1480	125.0	185	73	6.7	1639
		1432	397.8	31		151.1		80		
		1790	497.2	23		147.5		76		

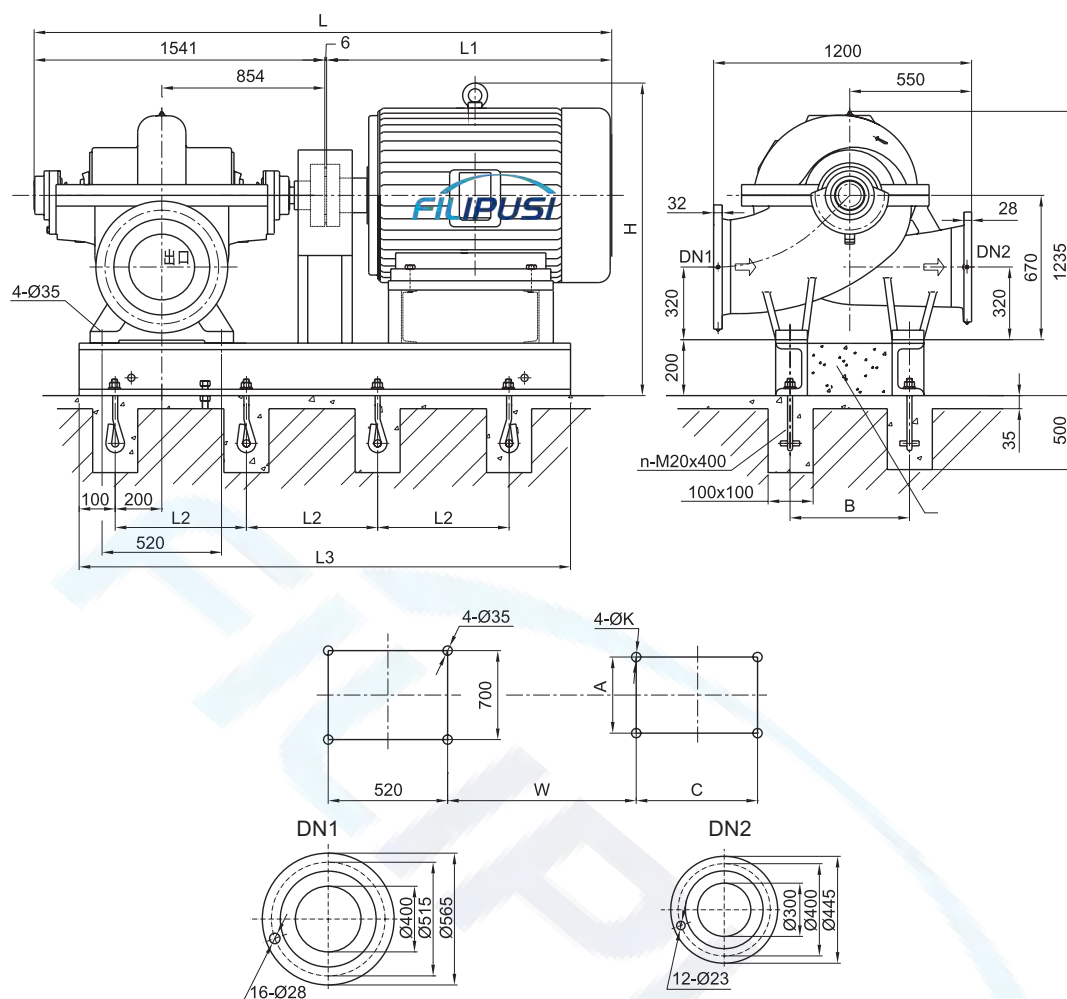


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)										重量 Weight (kg)		地脚数量
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	W	A	C	K	电机 Motor	底座 Baseplate	n(个)
CW400-300/300A	355L1-4	380		355	3237	1690	955	2460	700	1635	1064	610	630	28	1630	658	6
	355M-4	380		315	3167	1620	955	2460	700	1635	1064	610	560	28	1530	658	6
	315M-4	380		250~185	2817	1270	900	2110	700	1485	986	508	457	28	1075	649	6
	400-4	6000		450/355	3487	1940	860	2970	810	1800	1145	710	1000	35	2380	667	8
	355-4	6000		315	3367	1820	825	2855	700	1685	1125	630	900	28	2160	664	8
	355-4	6000		250/200	3367	1820	825	2855	700	1685	1125	630	900	28	1840	664	8
	450-4	10000		450~200	3597	2050	900	3130	920	1370	1165	800	1120	35	3180	675	8
	355L-4	380		315	3077	1530	955	2315	700	1230	1024	610	630	28	1870	660	6
	355M2-4	380		250	3077	1530	950	2265	700	1230	1024	610	560	28	1720	656	6
	315L2-4	380		200/185	2847	1300	950	2185	700	1045	986	508	508	28	1170	650	6


CW400-350

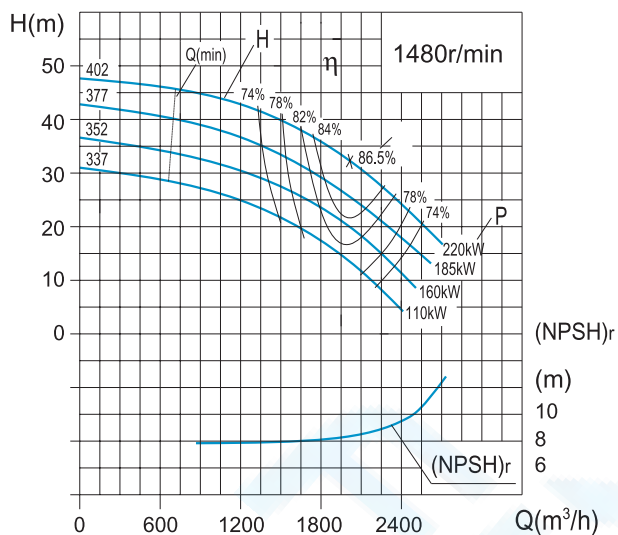


CW400-350A

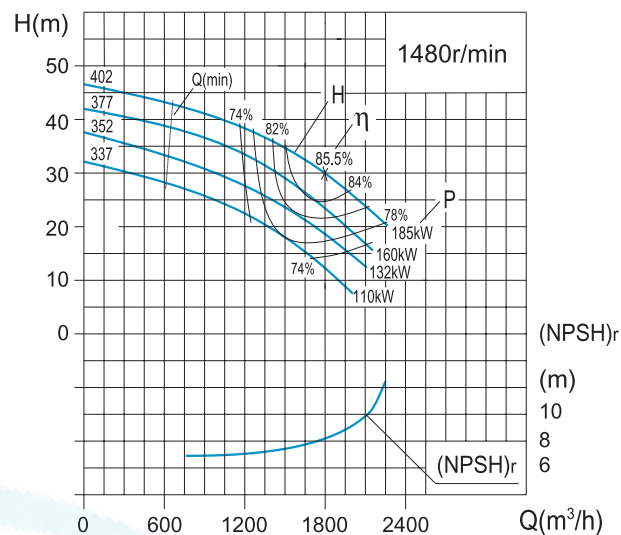


泵型号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) _r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW400-350	402	1211	336.3	43	1480	194.2	220	73	8.5	1195
		2018	560.6	32		202.1		87		
		2523	700.7	24		208.7		79		
	377	1181	328.0	37	1480	163.0	185	73	8.4	1193
		1968	546.7	27		170.2		85		
		2460	683.3	19		163.2		78		
	352	1151	319.7	31	1480	134.9	160	72	8.3	1191
		1918	532.8	22		138.4		83		
		2398	666.0	13		108.8		78		
	337	1121	311.3	25	1480	107.5	110	71	8.2	1191
		1868	518.9	16		101.7		80		
		2335	648.6	8		69.7		73		
CW400-350A	402	1039	288.7	39	1480	149.2	185	74	8.0	1194
		1732	481.1	31		170.0		86		
		2165	601.4	24		170.5		83		
	377	985	273.7	34	1480	125.0	160	73	7.9	1192
		1642	456.1	27		143.7		84		
		2053	570.1	20		141.5		79		
	352	943	262.0	29	1480	103.5	132	72	7.8	1190
		1572	436.7	23		120.1		82		
		1965	545.8	16		109.8		78		
	337	901	250.3	25	1480	86.4	110	71	7.7	1189
		1502	417.2	18		94.4		78		
		1878	521.5	12		82.9		74		

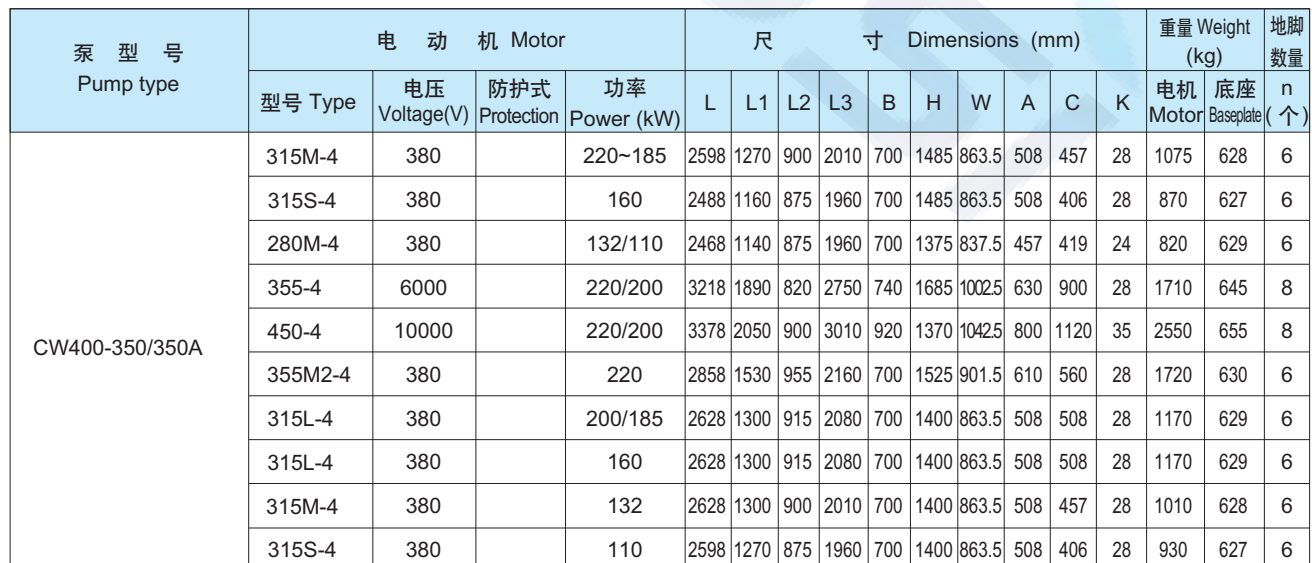


CW450-350

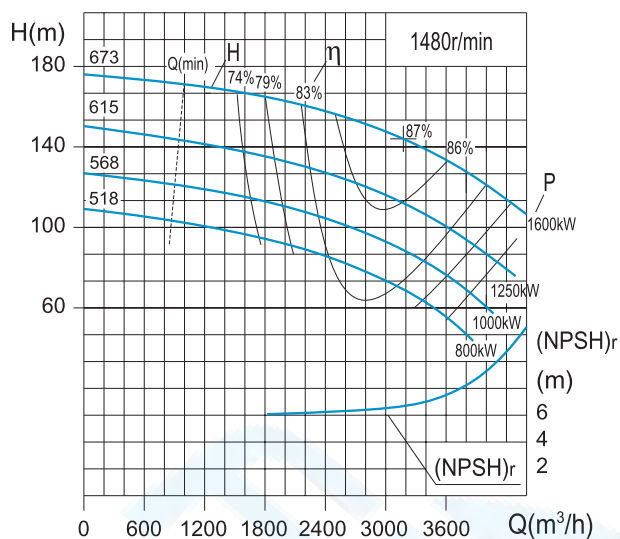

CW450-350A

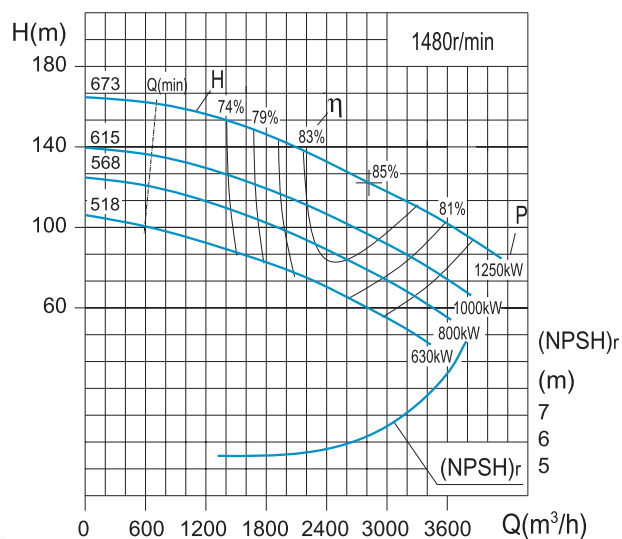


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW450-350	673	1907	529.6	164	1480	1077.4	1600	79	6.5	2518
		3178	882.7	144		1432.5		87		
		3813	1059.2	127		1590.9		83		
	615	1796	499.0	135	1480	845.5	1250	78	6.4	2516
		2994	831.6	116		1103.8		86		
		3593	998.0	101		1206.4		82		
	568	1718	477.1	113	1480	693.1	1000	76	6.3	2513
		2863	795.2	95		871.2		85		
		3435	954.3	83		955.5		81		
	518	1655	459.9	95	1480	571.0	800	75	6.2	2510
		2759	766.4	77		689.3		84		
		3311	919.7	66		751.9		79		
CW450-350A	673	1693	470.2	147	1480	869.1	1250	78	6.3	2518
		2821	783.6	123		1107.7		85		
		3385	940.3	107		1220.5		81		
	615	1583	439.8	123	1480	689.8	1000	77	6.2	2516
		2639	733.1	103		878.2		84		
		3167	879.7	87		941.4		80		
	568	1487	413.1	107	1480	587.0	800	74	6.1	2513
		2479	688.6	87		710.2		83		
		2975	826.3	75		769.8		79		
	518	1401	389.2	89	1480	464.4	630	73	6.0	2510
		2335	648.6	73		564.3		82		
		2802	778.4	63		614.5		78		

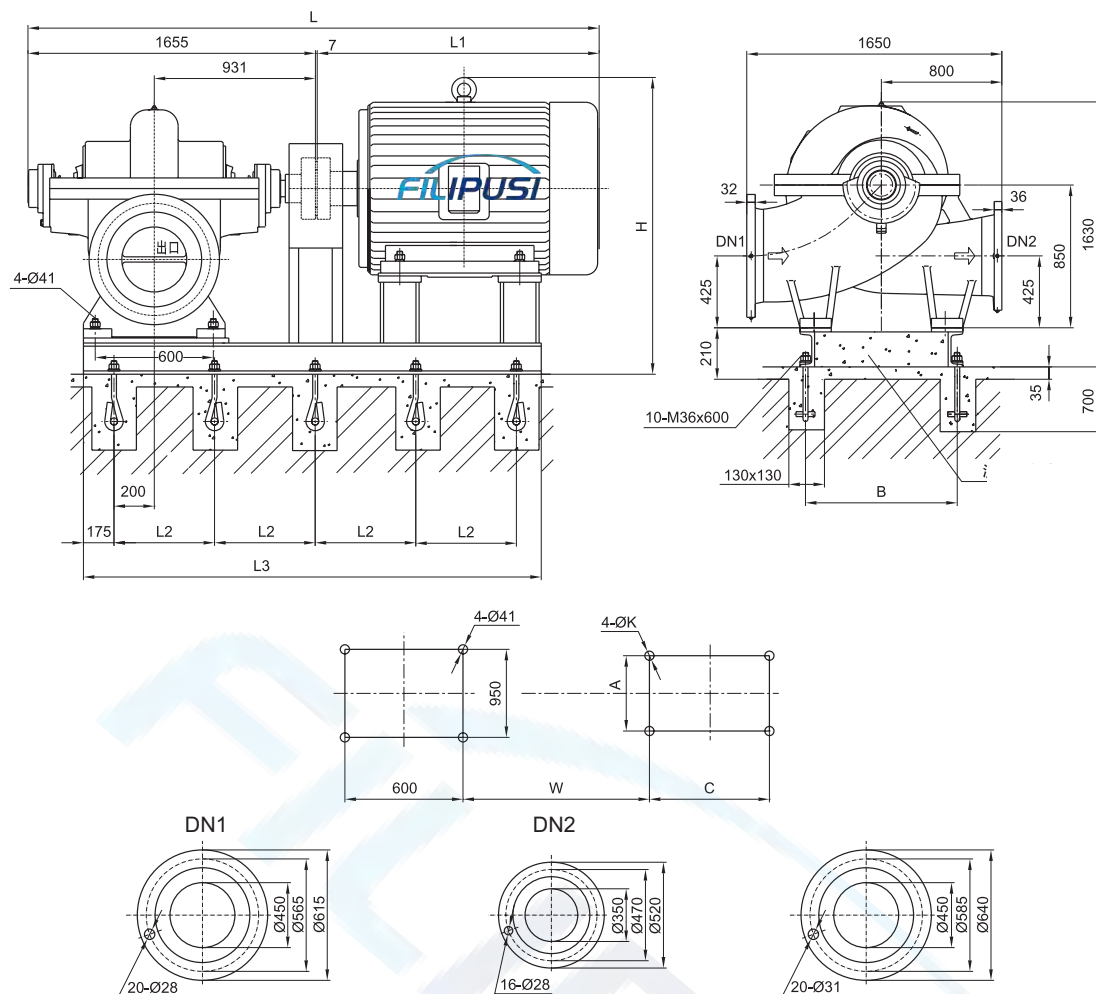


泵型号 Pump type	电动机 Motor				尺寸 Dimensions (mm)										重量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	W	A	C	K	电机 Motor	底座 Baseplate
CW450-350/350A	560-4	6000		1600	4562	2900	800	3646	1150	2350	1388	1000	1400	42	4918	1098
	500-4	6000		1250	4212	2550	740	3488	1050	2215	1363	900	1250	42	4470	1088
	500-4	6000		1000	4212	2550	740	3488	1050	2215	1363	900	1250	42	4010	1088
	450-4	6000		800	3842	2180	710	3283	960	2085	1203	800	1120	35	3300	1058
	450-4	6000		630	3842	2180	710	3283	960	2085	1203	800	1120	35	3092	1058
	560-4	10000		1600	4562	2900	800	3646	1150	2260	1388	1000	1400	42	7150	1188
	560-4	10000		1250	4562	2900	800	3646	1150	2260	1388	1000	1400	42	6225	1188
	500-4	10000		1000	4212	2550	740	3393	1050	1610	1323	900	1250	42	4850	1158
	500-4	10000		800	4212	2550	740	3393	1050	1610	1323	900	1250	42	4600	1158
	450-4	10000		630	3842	2180	710	3256	960	1560	1203	800	1120	35	3461	1138


CW450-350

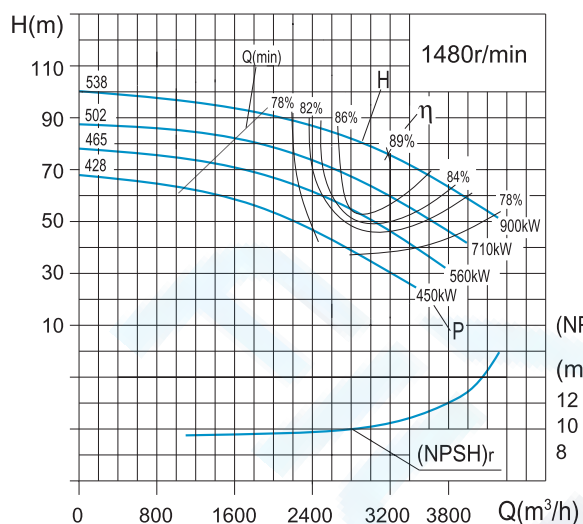


CW450-350A

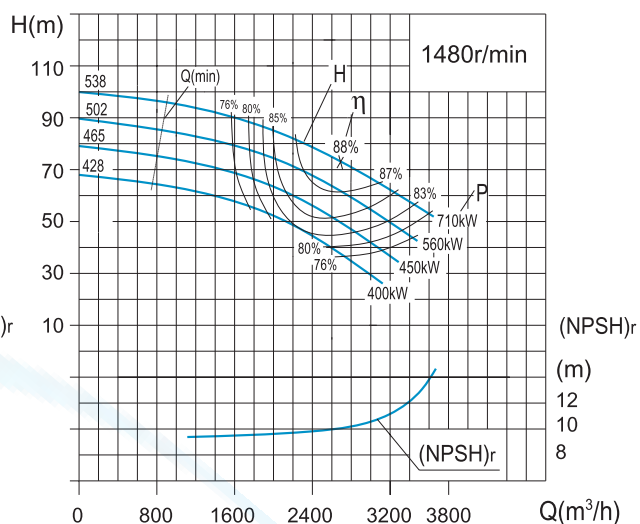


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW450-350	538	1908	530.0	89	1480	600.6	900	77	10.5	1840
		3180	883.3	76		739.5		89		
		3975	1104.2	64		824.8		84		
	502	1776	493.3	80	1480	502.5	710	77	10.3	1838
		2960	822.2	66		611.5		87		
		3700	1027.8	54		655.6		83		
	465	1716	476.7	69	1480	424.3	560	76	10.2	1836
		2860	794.4	55		498.1		86		
		3575	993.1	41		518.4		77		
	428	1614	448.3	56	1480	328.2	450	75	10.0	1834
		2690	747.2	44		413.2		78		
		3363	934.0	33		397.6		76		
CW450-350A	538	1614	448.3	89	1480	501.5	710	78	10.0	1839
		2690	747.2	73		607.7		88		
		3363	934.0	62		660.2		86		
	502	1494	415.0	80	1480	428.3	560	76	9.8	1837
		2490	691.7	66		514.4		87		
		3113	864.6	51		527.2		82		
	465	1392	386.7	69	1480	348.8	450	75	9.6	1835
		2320	644.4	56		416.3		85		
		2900	805.6	46		443.0		82		
	428	1368	380.0	57	1480	283.1	400	75	9.5	1833
		2280	633.3	46		344.1		83		
		2850	791.7	35		357.4		76		

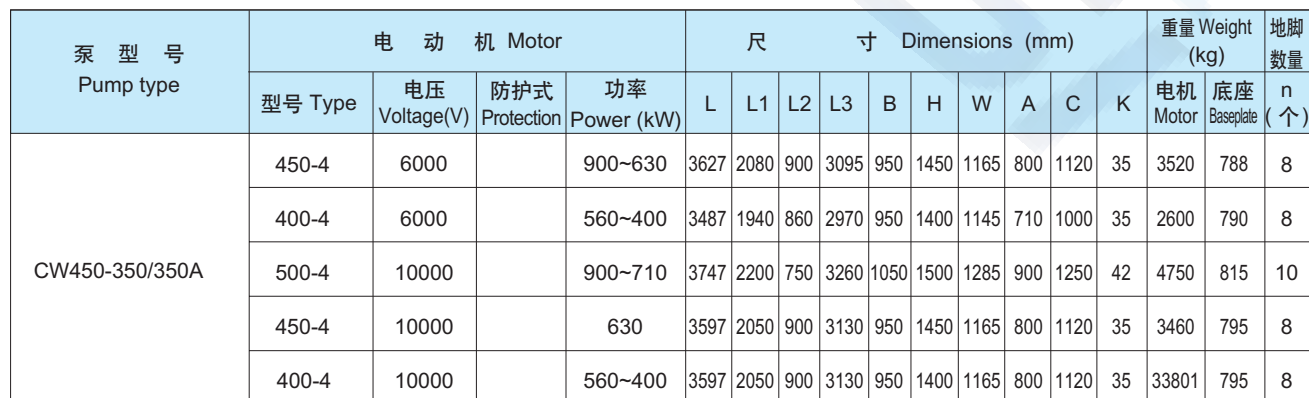


CW500-400

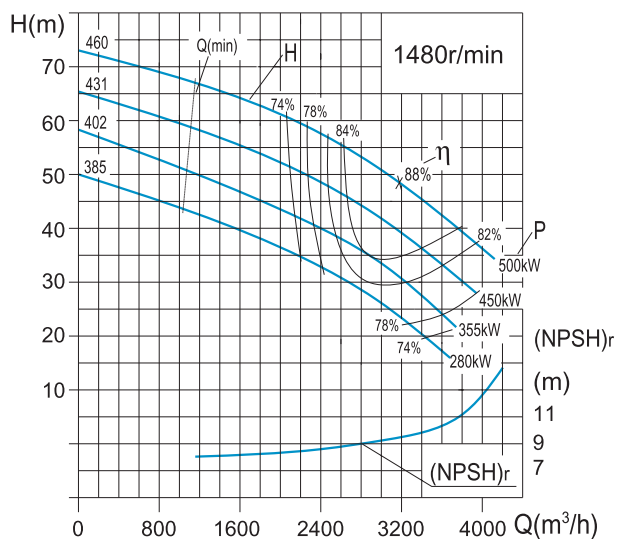

CW500-400A

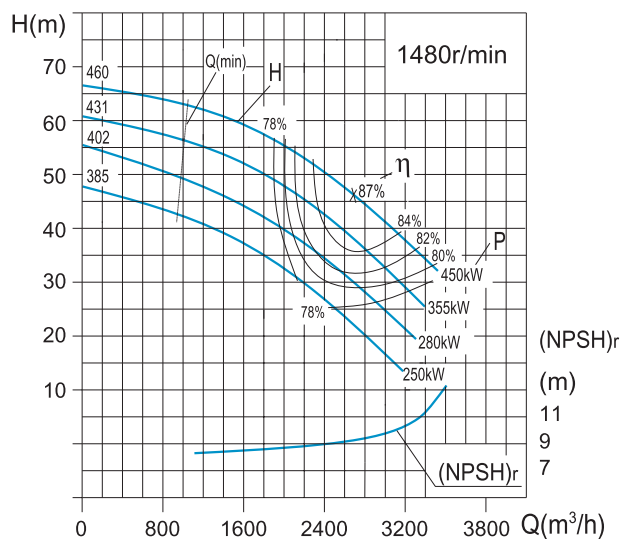


泵型号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW500-400	460	1902	528.3	59	1480	413.0	500	74	9.8	1380
		3170	880.6	48		470.9		88		
		3963	1100.7	36		468.0		83		
	431	1836	510.0	49	1480	335.6	450	73	9.6	1378
		3060	850.0	39		377.9		86		
		3825	1062.5	31		398.7		81		
	402	1794	498.3	42	1480	285.0	355	72	9.5	1376
		2990	830.6	32		310.2		84		
		3738	1038.2	22		279.9		80		
	385	1734	481.7	36	1480	242.9	280	70	9.3	1374
		2890	802.8	25		242.9		81		
		3613	1003.5	17		226.0		74		
CW500-400A	460	1614	448.3	57	1480	334.1	450	75	9.2	1378
		2690	747.2	46		387.3		87		
		3363	934.0	36		392.4		84		
	431	1536	426.7	50	1480	286.5	355	73	9.0	1376
		2560	711.1	40		328.1		85		
		3200	888.9	30		318.8		82		
	402	1494	415.0	43	1480	249.9	280	70	8.9	1374
		2490	691.7	32		264.6		82		
		3113	864.6	24		264.2		77		
	385	1386	385.0	37	1480	205.4	250	68	8.8	1372
		2310	641.7	28		223.0		79		
		2888	802.1	20		209.7		75		

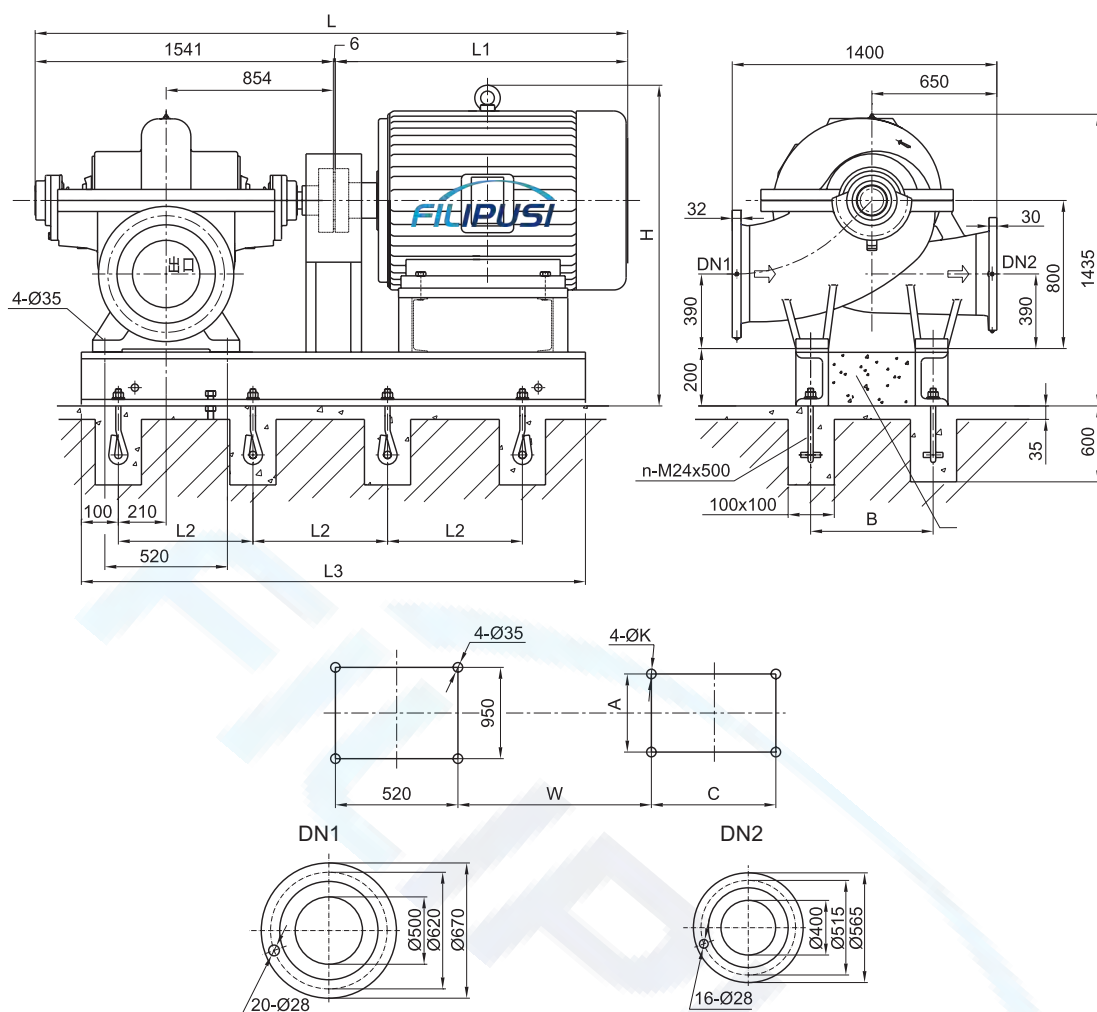


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)										重量 Weight (kg)		地脚数量
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	W	A	C	K	电机 Motor	底座 Baseplate	n(个)
CW500-400/400A	355L1-4	380		355	3237	1690	955	2470	950	1715	1064	610	630	28	1630	668	6
	355M-4	380		315/280	3167	1620	955	2400	950	1715	1064	610	560	28	1530	668	6
	315M-4	380		250	2817	1270	880	2110	950	1565	986	508	457	28	1075	663	6
	400-4	6000		500~355	3536	1989	860	3005	950	1480	1145	710	1000	35	2620	680	8
	355-4	6000		315	3437	1890	860	2885	950	1170	1125	630	900	28	1860	675	8
	355-4	6000		280/250	3437	1890	860	2885	950	1170	1125	630	900	28	1800	675	8
	450-4	10000		500~250	3597	2050	950	3135	950	1450	1165	800	1120	35	3315	735	8
	355L1-4	380		280	3087	1530	955	2350	950	1630	1024	610	630	28	1070	665	6
	355M2-4	380		250	3087	1530	955	2350	950	1630	1024	610	560	28	1720	665	6







CW500-300

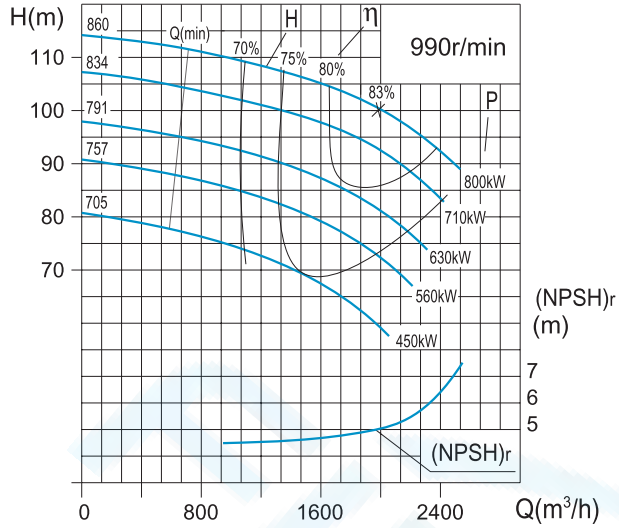

CW500-300A

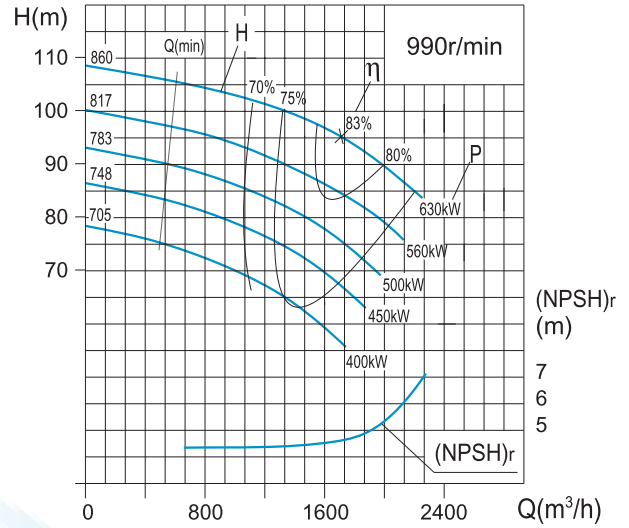


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW500-300	860	1212	336.7	108	990	488.3	800	73	5.0	2408
		2020	561.1	100		662.8		83		
		2424	673.3	92		778.6		78		
	834	1176	326.6	101	990	455.4	710	71	4.9	2406
		1959	544.3	93		613.7		81		
		2351	653.1	85		706.9		77		
	791	1115	309.7	92	990	404.9	630	69	4.7	2404
		1858	516.2	84		536.9		79		
		2230	619.5	77		615.3		76		
	757	1067	296.3	85	990	368.5	560	67	4.6	2402
		1778	493.8	77		482.1		77		
		2133	592.5	70		542.2		75		
	705	994	276.1	75	990	312.3	450	65	4.4	2400
		1656	460.1	67		400.4		75		
		1988	552.1	60		438.9		74		
CW500-300A	860	1028	285.7	103	990	439.1	630	66	4.5	2406
		1714	476.1	95		534.3		83		
		2057	571.3	88		628.4		78		
	817	977	277.1	94	990	392.6	560	64	4.4	2404
		1628	461.8	86		469.4		81		
		1954	554.2	80		552.9		77		
	783	936	268.5	87	990	359.4	500	62	4.3	2402
		1560	447.6	79		423.0		79		
		1872	537.1	72		482.9		76		
	748	895	255.7	80	990	326.5	450	60	4.1	2400
		1491	426.1	72		379.2		77		
		1789	511.4	65		422.3		75		
	705	843	245.7	72	990	286.6	400	58	4.0	2398
		1406	409.5	64		326.0		75		
		1687	491.4	57		353.8		74		

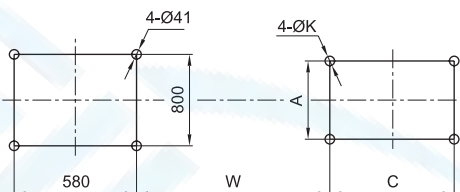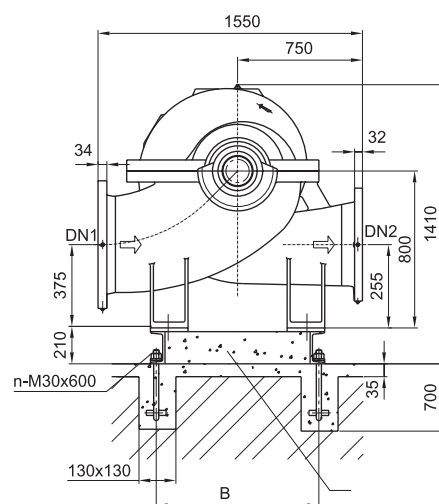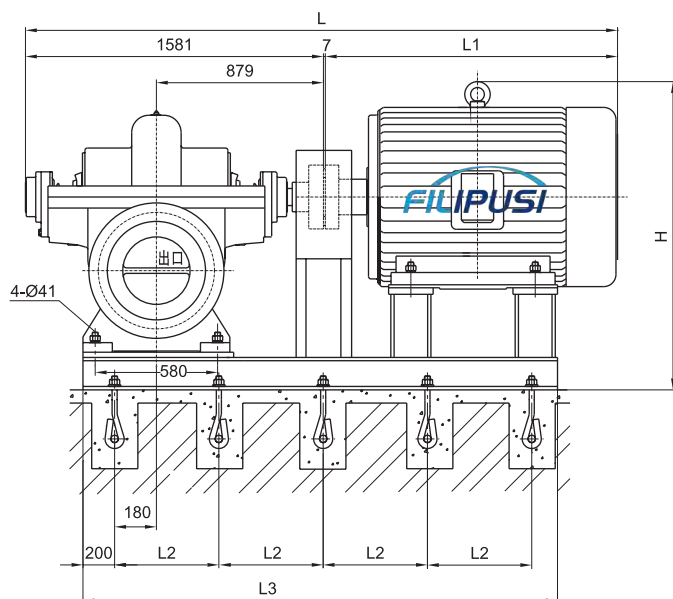


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)										重量 Weight (kg)		地脚数量
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	W	A	C	K	电机 Motor	底座 Baseplate	n (个)
CW500-300/300A	500-6	6000		800/710	4508	2920	760	3481	1050	1550	1321	900	1250	42	4020	810	10
	450-6	6000		630~450	4198	2610	700	3240	960	1495	1201	800	1120	35	3700	800	10
	400-6	6000		400	3898	2310	870	3066	960	1445	1141	710	1000	35	2590	794	8
	500-6	10000		800~500	3788	2200	750	3400	1050	1560	1321	900	1250	42	5050	915	10
	450-6	10000		450/400	3638	2050	700	3230	960	1510	1161	800	1120	35	3377	800	10
	400L-6	380		400	3508	1920	760	2788	960	1650	1086	686	710	35	3400	786	8


CW500-350

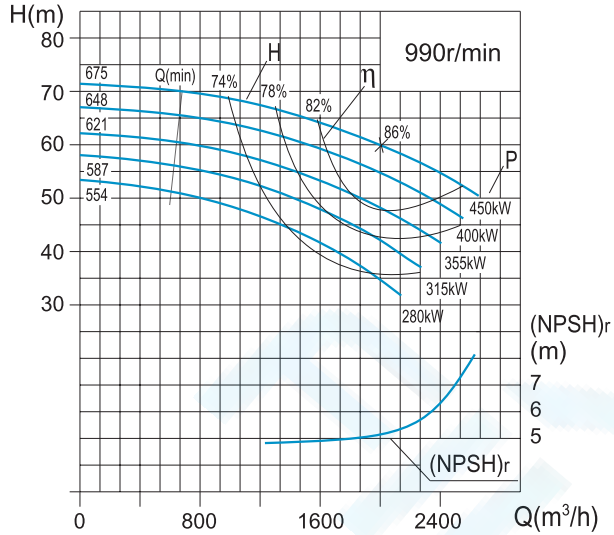

CW500-350A

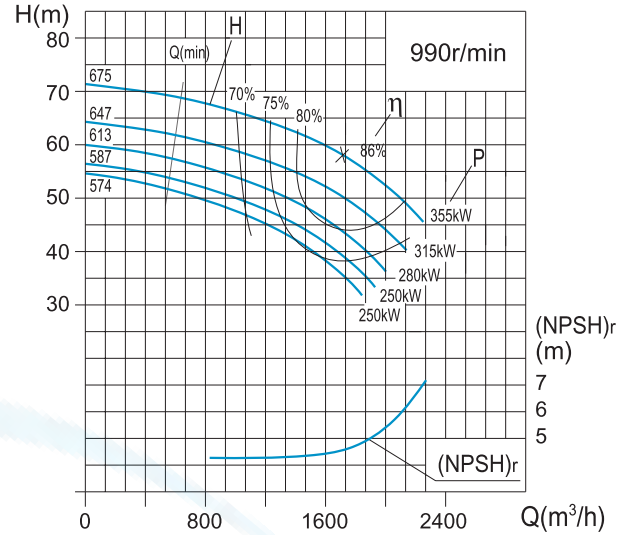


泵型号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW500-350	675	1212	336.7	68	990	287.7	450	78	5.0	2248
		2020	561.1	60		381.3		86		
		2424	673.3	55		437.4		83		
	648	1164	323.2	63	990	266.2	400	75	4.8	2246
		1939	538.7	55		349.5		83		
		2327	646.4	49		388.2		80		
	621	1115	309.7	58	990	244.6	355	72	4.7	2244
		1858	516.2	50		319.2		80		
		2230	619.5	44		347.0		77		
	587	1054	292.9	53	990	217.4	315	70	4.5	2242
		1757	488.2	45		276.8		78		
		2109	585.8	39		298.6		75		
CW500-350A	675	994	276.1	49	990	195.0	280	68	4.4	2240
		1656	460.1	40		237.9		76		
		1988	552.1	34		252.1		73		
	647	1028	285.7	66	990	262.6	355	70	4.5	2246
		1714	476.1	58		313.1		86		
		2057	571.3	52		354.5		82		
	613	987	274.2	60	990	240.1	315	67	4.3	2244
		1645	457.1	52		280.7		83		
		1975	548.5	46		312.4		79		
	587	936	265.7	55	990	216.4	280	64	4.3	2242
		1560	442.8	47		249.6		80		
		1872	531.3	41		274.4		76		
	574	895	251.1	52	990	203.7	250	62	4.2	2240
		1491	428.5	44		227.4		78		
		1789	514.2	38		249.7		74		
	574	874	242.8	50	990	197.7	250	60	4.0	2238
		1457	404.7	42		217.6		76		
		1748	485.6	36		237.5		72		

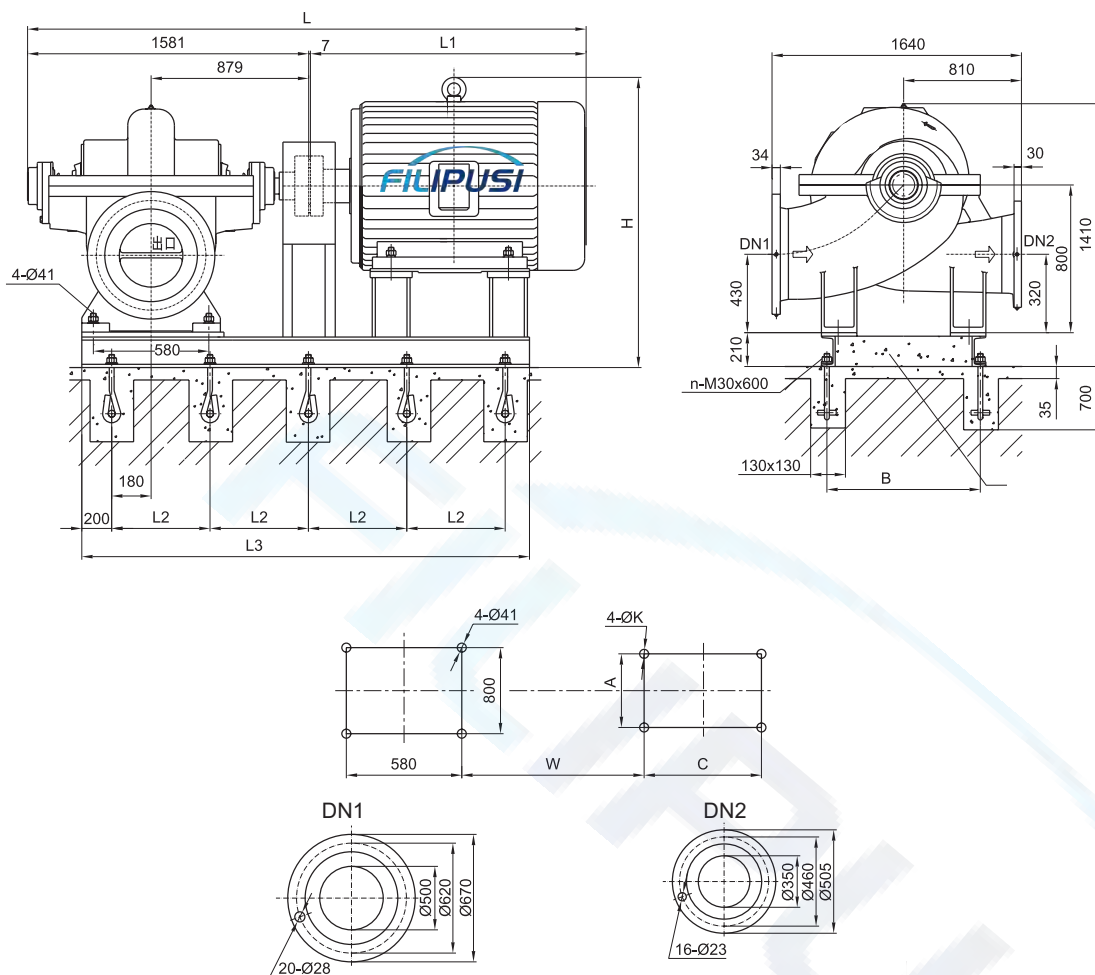


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)										重量 Weight (kg)		地脚数量 n(个)
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	W	A	C	K	电机 Motor	底座 Baseplate	
CW500-350/350A	355L1-6	380		280	3288	1690	700	2560	960	1775	1060	610	630	28	1710	758	8
	355M-6	380		250/220	3218	1620	700	2490	960	1775	1060	610	560	28	1610	757	8
	450-6	6000		450	3708	2120	700	3270	960	1495	1201	800	1120	35	3100	795	10
	400-6	6000		400~280	3528	1940	700	3120	960	1445	1141	710	1000	35	2590	782	10
	355-6	6000		250/220	3408	1820	830	2950	960	1435	1121	630	900	28	2290	776	8
	450-6	10000		450	3638	2050	700	3230	960	1510	1161	800	1120	35	3377	790	10
	450-6	10000		400~200	3638	2050	700	3230	960	1510	1161	800	1120	35	3295	790	10
	400L-6	380		400	3508	1920	760	2788	960	1700	1086	686	710	35	3400	780	8
	400M-6	380		355~280	3508	1920	760	2788	960	1700	1086	686	630	35	3100	780	8
	355L-6	380		250/220	3158	1570	700	2520	960	1665	1020	610	630	28	1820	762	8


CW500-350

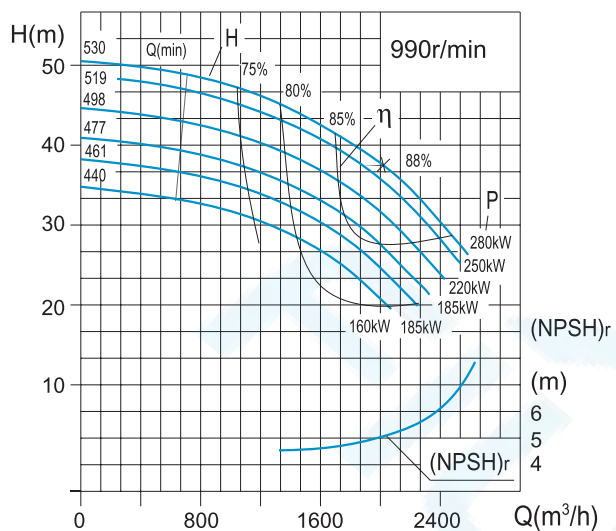

CW500-350A

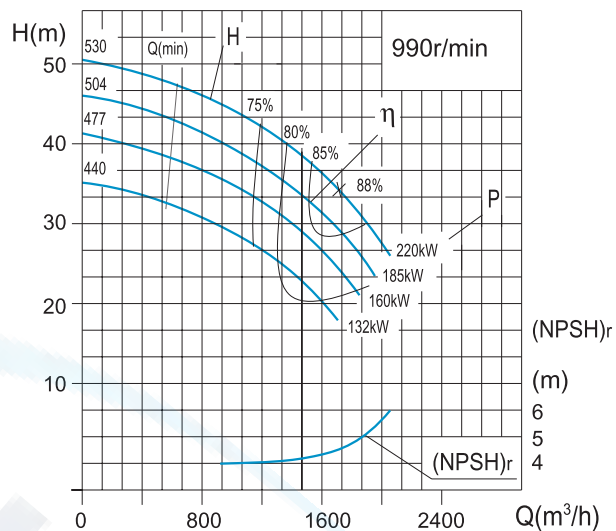


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW500-350	530	1212	336.7	46	990	194.7	280	78	5.0	2220
		2020	561.1	36		225.0		88		
		2424	673.3	29		227.9		84		
	519	1188	329.9	44	990	183.4	250	77	4.9	2218
		1980	549.9	34		210.4		87		
		2376	659.9	27		210.4		83		
	498	1139	316.5	40	990	164.0	220	76	4.8	2216
		1899	527.4	31		187.9		86		
		2279	632.9	24		181.6		82		
	477	1091	303.0	37	975	145.9	185	75	4.6	2214
		1818	505.0	29		166.8		85		
		2182	606.0	23		168.7		81		
	461	1054	292.9	34	975	133.5	185	74	4.5	2212
		1757	488.2	27		152.5		84		
		2109	585.8	21		150.8		80		
CW500-350A	530	1006	279.4	31	990	117.5	160	73	4.4	2210
		1677	465.7	24		134.0		83		
		2012	558.9	19		131.8		79		
	504	1028	285.7	45	990	177.6	220	70	4.5	2218
		1714	476.1	35		184.8		88		
		2057	571.3	28		191.4		83		
	477	977	274.2	40	990	156.8	185	68	4.3	2216
		1628	457.1	31		162.1		86		
		1954	548.5	26		168.2		81		
	440	926	257.1	36	990	137.3	160	66	4.2	2214
		1543	428.5	28		141.1		84		
		1851	514.2	23		146.6		79		
	440	854	237.1	31	990	111.1	132	64	3.9	2212
		1423	395.2	24		113.4		82		
		1707	474.2	20		118.0		77		

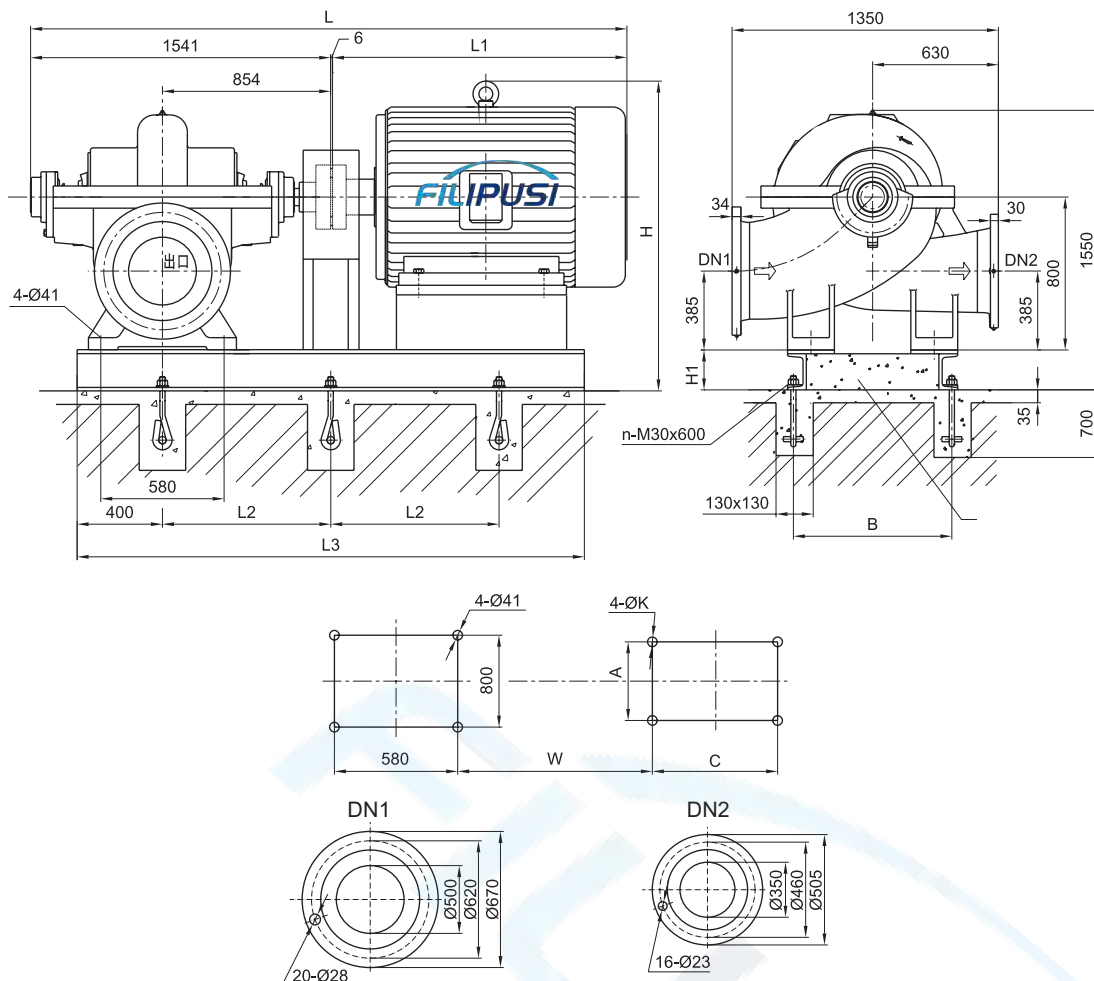


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)												重量 Weight (kg)		地脚数量
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	H1	W	A	C	K	电机 Motor	底座 Baseplate	n (个)	
CW500-350/350A	355L1-6	380		280	3237	1690	800	2400	960	1775	210	1034	610	630	28	1710	598	6	
	355M-6	380		250~185	3267	1620	800	2400	960	1775	210	1034	610	560	28	1610	598	6	
	315M-6	380		160/132	2817	1270	730	2260	960	1625	190	956	508	457	28	1050	595	6	
	400-6	6000		280	3527	1980	800	3100	960	1940	210	1115	710	1000	35	2310	635	8	
	355-6	6000		250~200	3437	1890	750	2960	960	1825	210	1095	630	900	28	1930	625	8	
	450-6	10000		280~200	3597	2050	850	3230	960	1510	210	1135	800	1120	35	2950	640	8	
	400M-6	380		280	3437	1890	1000	2800	960	1650	210	1060	686	630	35	2100	605	6	
	355L ₂ -6	380		250/220	3117	1570	800	2400	960	1665	210	994	610	630	28	1820	598	6	
	355M-6	380		185/160	3117	1570	800	2400	960	1665	210	994	610	560	28	1670	598	6	
	315L ₂ -6	380		132	2887	1340	730	2260	960	1540	190	956	508	508	28	1175	595	6	


CW500-400

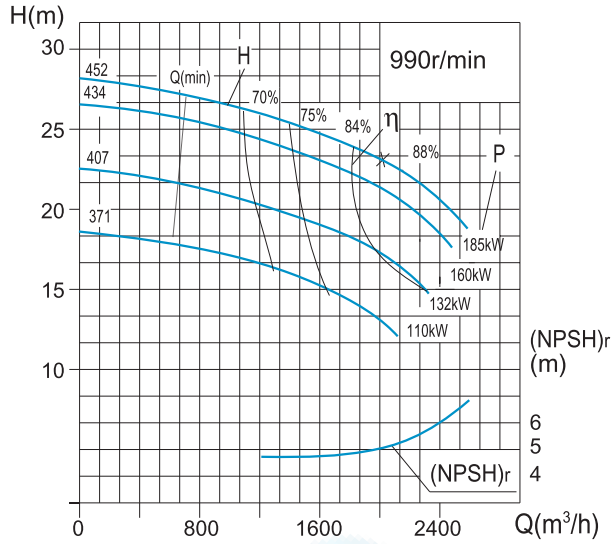

CW500-400A

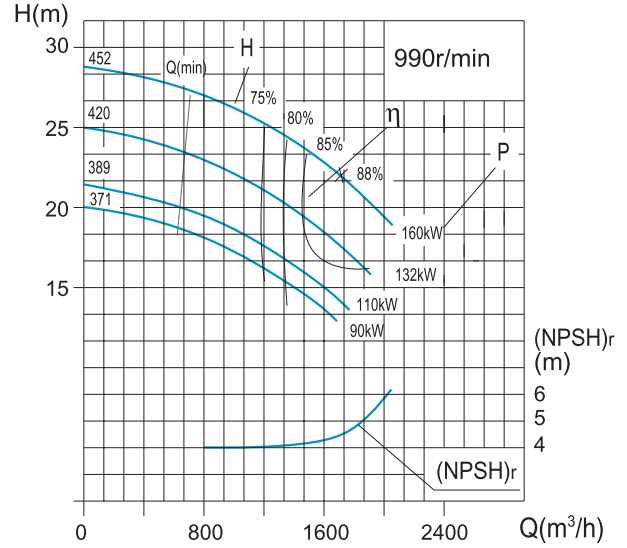


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW500-400	452	1212	336.7	26	990	116.5	185	73	5.0	1728
		2020	561.1	23		143.8		88		
		2424	673.3	19		139.5		88		
	434	1164	323.2	24	990	106.0	160	71	4.8	1726
		1939	538.7	20		125.8		86		
		2327	646.4	17		126.2		86		
	407	1091	303.0	21	990	89.8	132	69	4.6	1724
		1818	505.0	18		106.1		84		
		2182	606.0	15		106.5		84		
	371	994	276.1	17	990	70.0	110	67	4.4	1722
		1656	460.1	15		82.2		82		
		1988	552.1	13		82.5		82		
CW500-400A	452	1028	285.7	25	990	106.3	160	66	4.5	1726
		1714	476.1	22		118.1		88		
		2057	571.3	18		117.1		87		
	420	956	265.7	22	990	88.2	132	64	4.3	1724
		1594	442.8	19		97.2		86		
		1913	531.3	16		96.4		85		
	389	884	245.7	18	990	72.0	110	62	4.0	1722
		1474	409.5	16		78.7		84		
		1769	491.4	13		78.1		83		
	371	843	234.3	17	990	64.5	90	60	3.9	1720
		1406	390.4	15		69.9		82		
		1687	468.5	12		69.4		81		

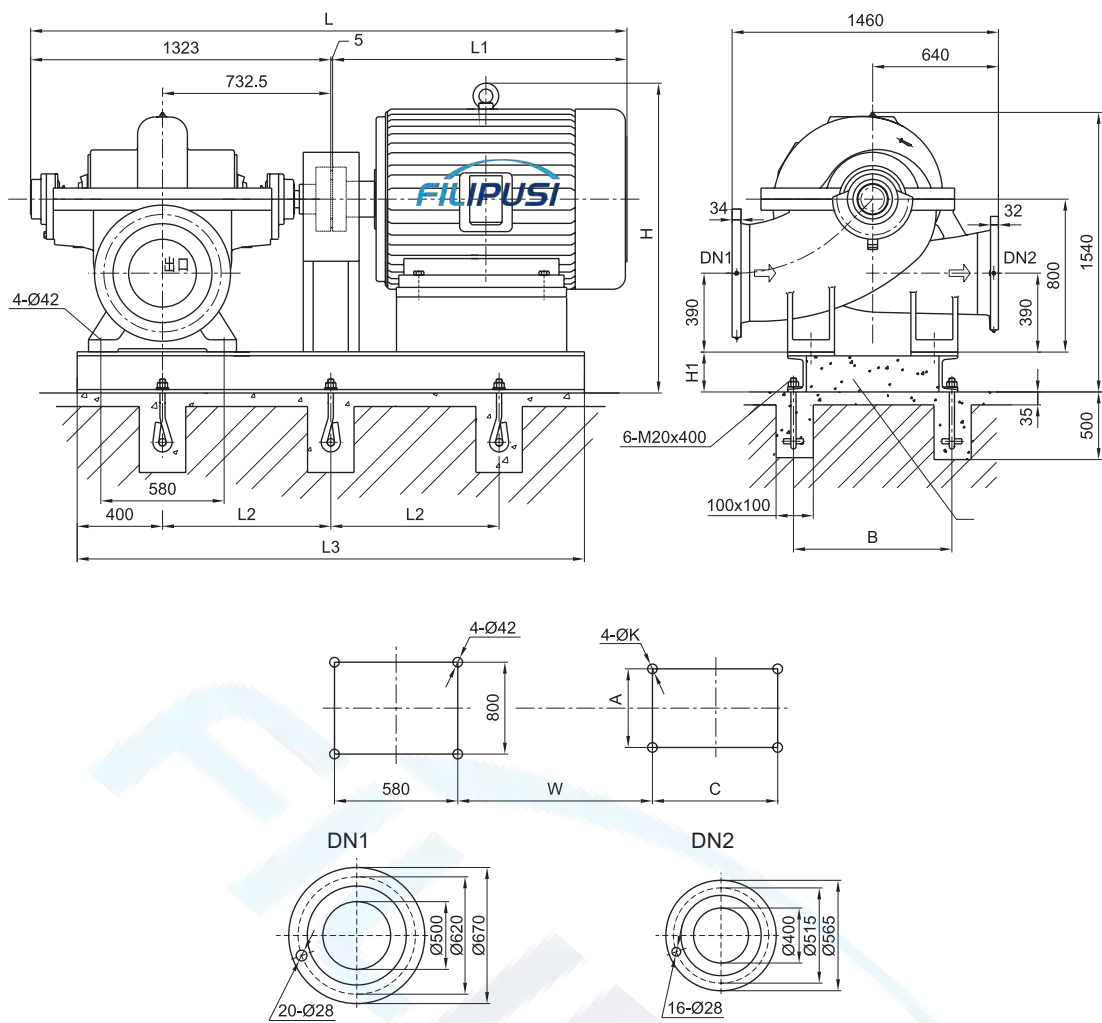


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)											重量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	H1	W	A	C	K	电机 Motor	底座 Baseplate
CW500-400/400A	355M1-6	380		185	2948	1620	800	2250	960	1775	210	911.5	610	560	28	1280	610
	315M-6	380		160/132	2598	1270	700	2090	960	1625	190	833.5	508	457	28	1050	608
	315S-6	380		110	2488	1160	700	2090	960	1605	190	833.5	508	406	28	915	608
	355M2-6	380		185	2896	1570	800	2250	960	1665	210	871.5	610	560	28	1730	610
	355M1-6	380		160	2896	1570	800	2250	960	1665	210	871.5	610	560	28	1620	610
	315L2-6	380		132	2666	1340	700	2160	960	1520	190	833.5	508	508	28	1175	611
	315L1-6	380		110	2666	1340	700	2160	960	1520	190	833.5	508	508	28	1110	611
	315M-6	380		90	2666	1340	700	2090	960	1520	190	833.5	508	457	28	940	608



CW500-500

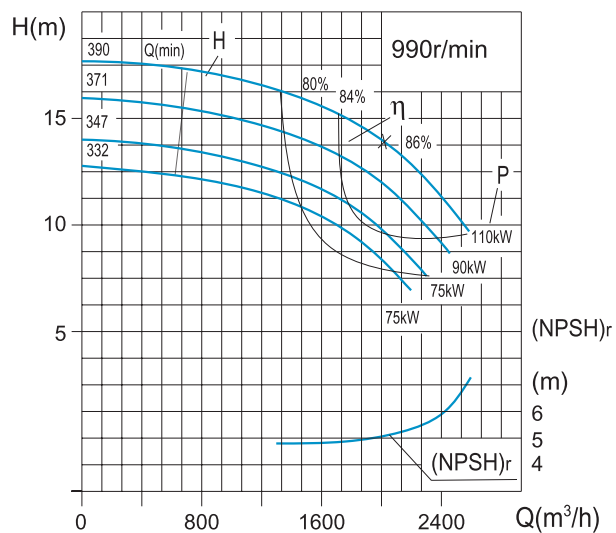

CW500-500A

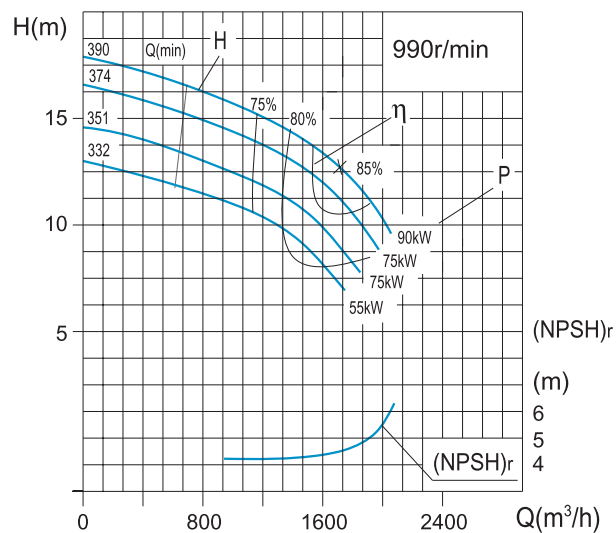


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW500-500	390	1212	336.7	17	990	70.1	110	80	5.0	1265
		2020	561.1	14		89.6		86		
		2424	673.3	10		76.2		84		
	371	1151	319.8	15	990	59.4	90	78	4.8	1264
		1919	533.1	12		73.7		84		
		2303	639.7	9		66.9		82		
	347	1079	299.6	13	990	50.1	75	76	4.6	1263
		1798	499.4	10		62.1		82		
		2157	599.3	8		56.4		80		
	332	1030	286.2	12	990	44.8	75	74	4.5	1262
		1717	476.9	9		55.5		80		
		2060	572.3	7		50.4		78		
CW500-500A	390	1028	285.7	16	990	64.0	90	72	4.5	1264
		1714	476.1	14		74.4		85		
		2057	571.3	10		64.0		83		
	374	987	277.1	15	990	58.2	75	70	4.4	1263
		1645	461.8	12		67.4		83		
		1975	554.2	9		58.0		81		
	351	926	260.0	13	990	49.4	75	68	4.2	1262
		1543	433.3	11		56.9		81		
		1851	519.9	8		49.0		79		
	332	874	242.8	12	990	42.9	55	66	4.0	1261
		1457	404.7	10		49.2		79		
		1748	485.6	7		42.4		77		

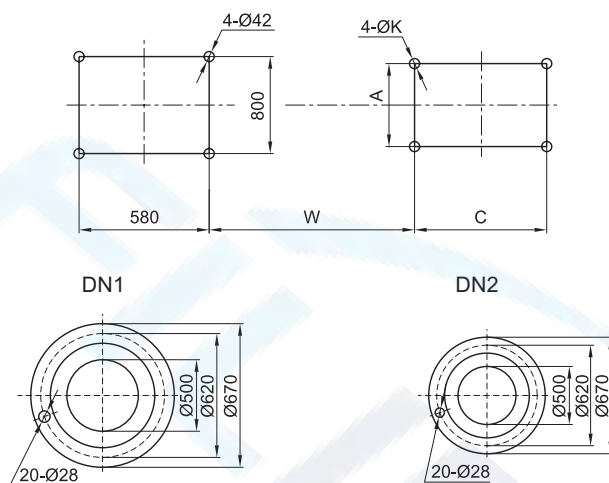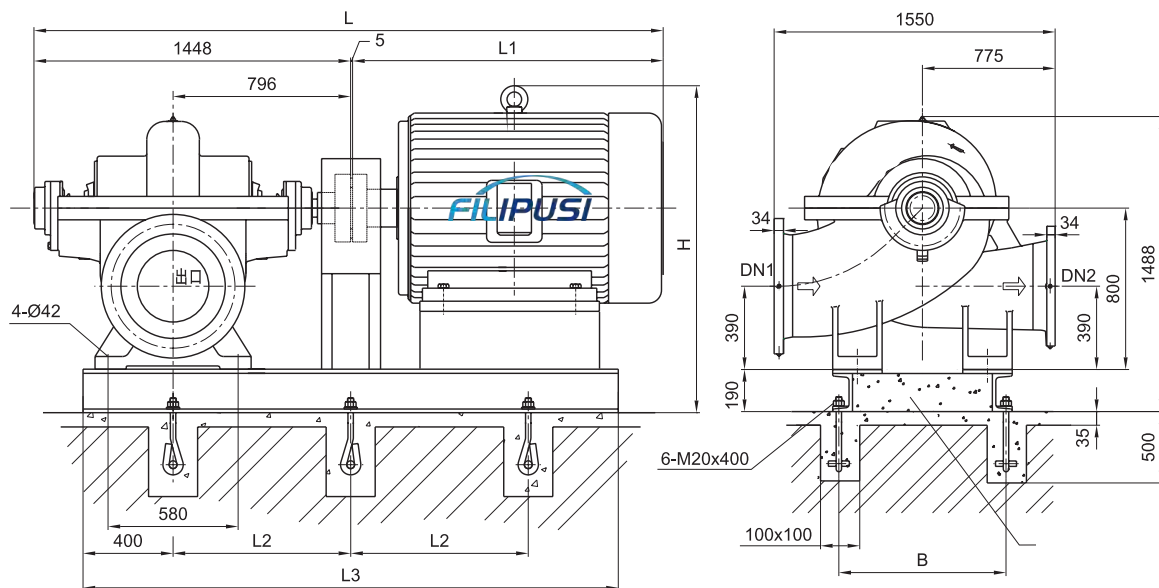


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)										重量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	W	A	C	K	电机 Motor	底座 Baseplate
CW500-500/500A	315S-6	380		110	2613	1160	700	2124	960	1625	897	508	406	28	915	618
	315L1-6	380		110	2793	1340	700	2224	960	1540	897	508	508	28	1110	621
	315M-6	380		90	2793	1340	700	2154	960	1540	897	508	457	28	940	619
	315S-6	380		75	2723	1270	700	2124	960	1540	897	508	406	28	861	618
	280M-6	380		55	2503	1050	595	2054	960	1410	841	457	419	24	540	617


CW600-400

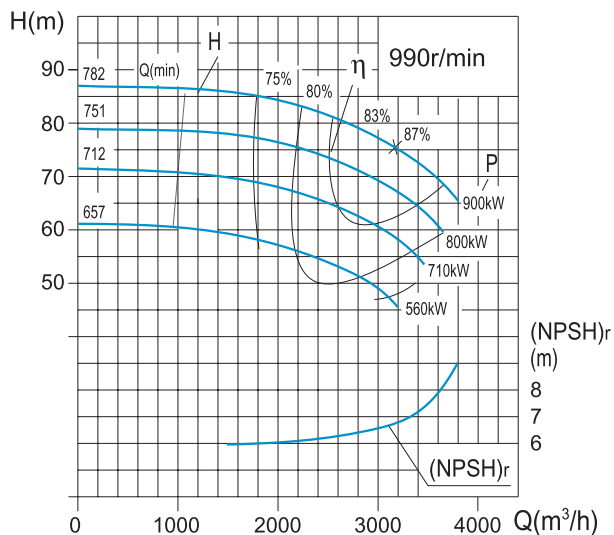

CW600-400A

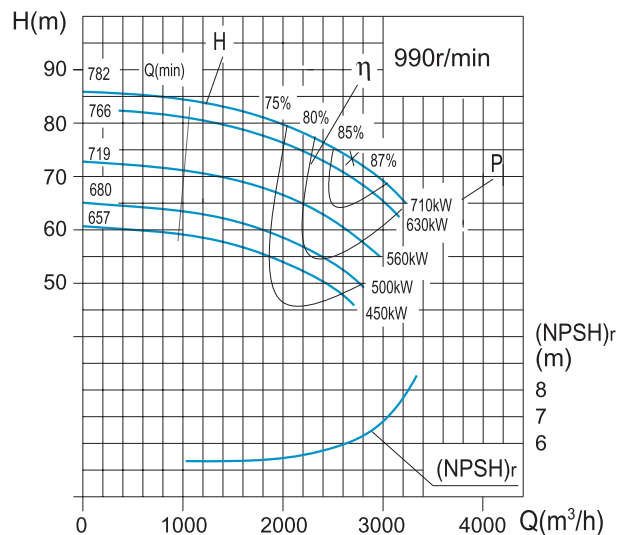


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW600-400	782	1902	528.3	85	990	578.4	900	76	6.7	4160
		3170	880.6	76		751.9		87		
		3804	1056.7	66		829.7		82		
	751	1826	507.2	78	990	525.6	800	74	6.5	4158
		3043	845.3	70		680.9		85		
		3652	1014.4	61		752.4		80		
	712	1731	480.8	70	990	460.1	710	72	6.3	4156
		2885	801.3	63		593.9		83		
		3462	961.6	54		657.3		78		
	657	1598	443.8	60	990	372.2	560	70	6.0	4154
		2663	739.7	53		478.7		81		
		3195	887.6	46		530.6		76		
CW600-400A	782	1614	448.3	82	990	527.8	710	68	6.0	4158
		2690	747.2	73		617.5		87		
		3228	896.6	64		696.9		81		
	766	1582	432.6	71	990	459.5	630	66	5.9	4157
		2636	721.0	63		534.1		85		
		3163	865.2	55		596.3		79		
	719	1485	414.7	65	990	408.6	560	64	5.7	4154
		2475	691.1	58		471.8		83		
		2970	829.4	50		527.7		77		
	680	1404	398.5	60	990	368.4	500	62	5.6	4152
		2340	664.2	54		422.3		81		
		2808	797.1	47		473.2		75		
	657	1356	376.6	54	990	328.1	450	60	5.4	4150
		2259	627.6	48		373.3		79		
		2711	753.2	42		419.1		73		

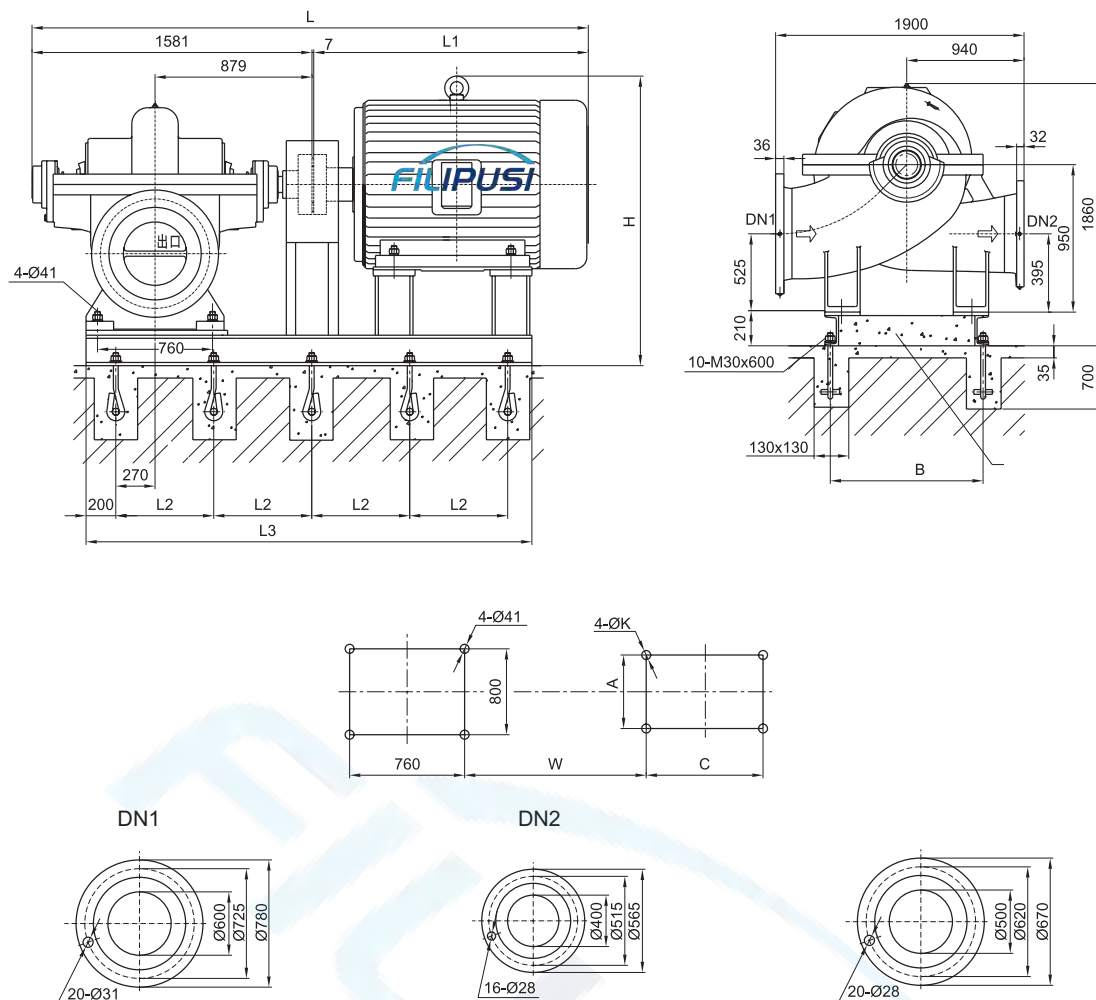


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)										重量 Weight (kg)	
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	W	A	C	K	电机 Motor	底座 Baseplate
CW600-400/400A	500-6	6000		900	4138	2550	780	3571	1050	1700	1231	900	1250	42	4170	826
	500-6	6000		800/710	4138	2550	780	3571	1050	1700	1231	900	1250	42	4020	826
	450-6	6000		630~450	3768	2180	720	3330	960	1645	1111	800	1120	35	3700	808
	560-6	10000		900	4038	2450	830	3760	1150	1780	1306	1000	1400	42	6085	855
	500-6	10000		800~500	3788	2200	780	3570	1150	1650	1231	900	1250	42	5050	820
	450-6	10000		450	3638	2050	720	3320	960	1550	1071	800	1120	35	3377	805


CW600-400

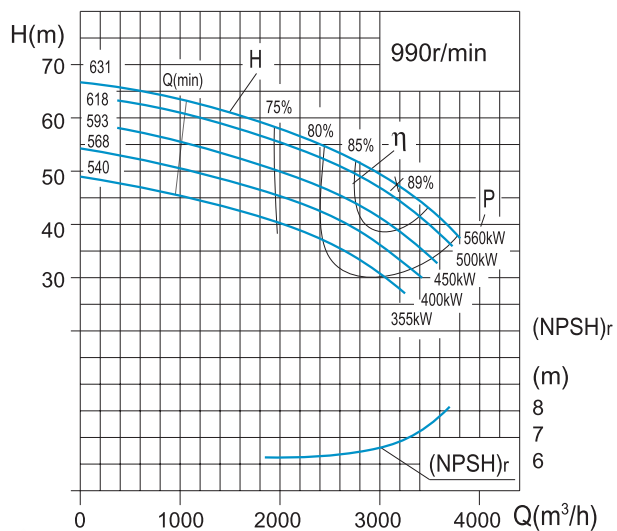

CW600-400A

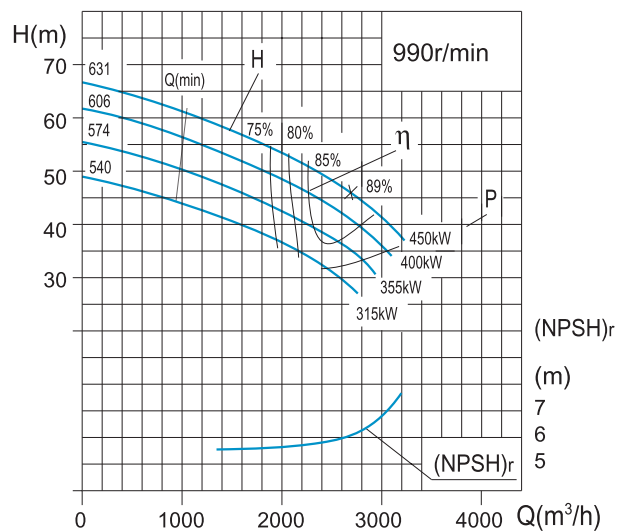


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW600-400	631	1902	528.3	59	990	389.1	560	78	6.7	3856
		3170	880.6	48		465.6		89		
		3804	1056.7	38		486.0		81		
	618	1864	517.8	56	990	375.9	500	76	6.6	3855
		3107	862.9	46		443.5		87		
		3728	1035.5	36		461.4		79		
	593	1788	496.6	52	990	340.7	450	74	6.5	3853
		2980	827.7	42		400.6		85		
		3576	993.3	33		417.7		77		
	568	1712	475.5	47	990	307.3	400	72	6.3	3851
		2853	792.5	38		360.1		83		
		3424	951.0	30		376.4		75		
CW600-400A	631	1626	451.7	43	990	271.0	355	70	6.1	3849
		2710	752.9	35		316.3		81		
		3252	903.5	27		331.6		73		
	606	1614	448.3	57	990	355.1	450	70	6.0	3855
		2690	747.2	46		382.4		89		
		3228	896.6	37		408.2		80		
	574	1549	434.9	52	990	323.4	400	68	5.9	3854
		2582	724.8	43		346.1		87		
		3099	896.7	34		370.4		78		
	540	1469	412.4	47	990	283.8	355	66	5.7	3851
		2448	687.4	38		301.7		85		
		2937	824.9	31		323.8		76		
540		1380	383.3	41	990	242.7	315	64	5.4	3848
		2300	638.8	34		256.3		83		
		2760	766.6	27		275.8		74		

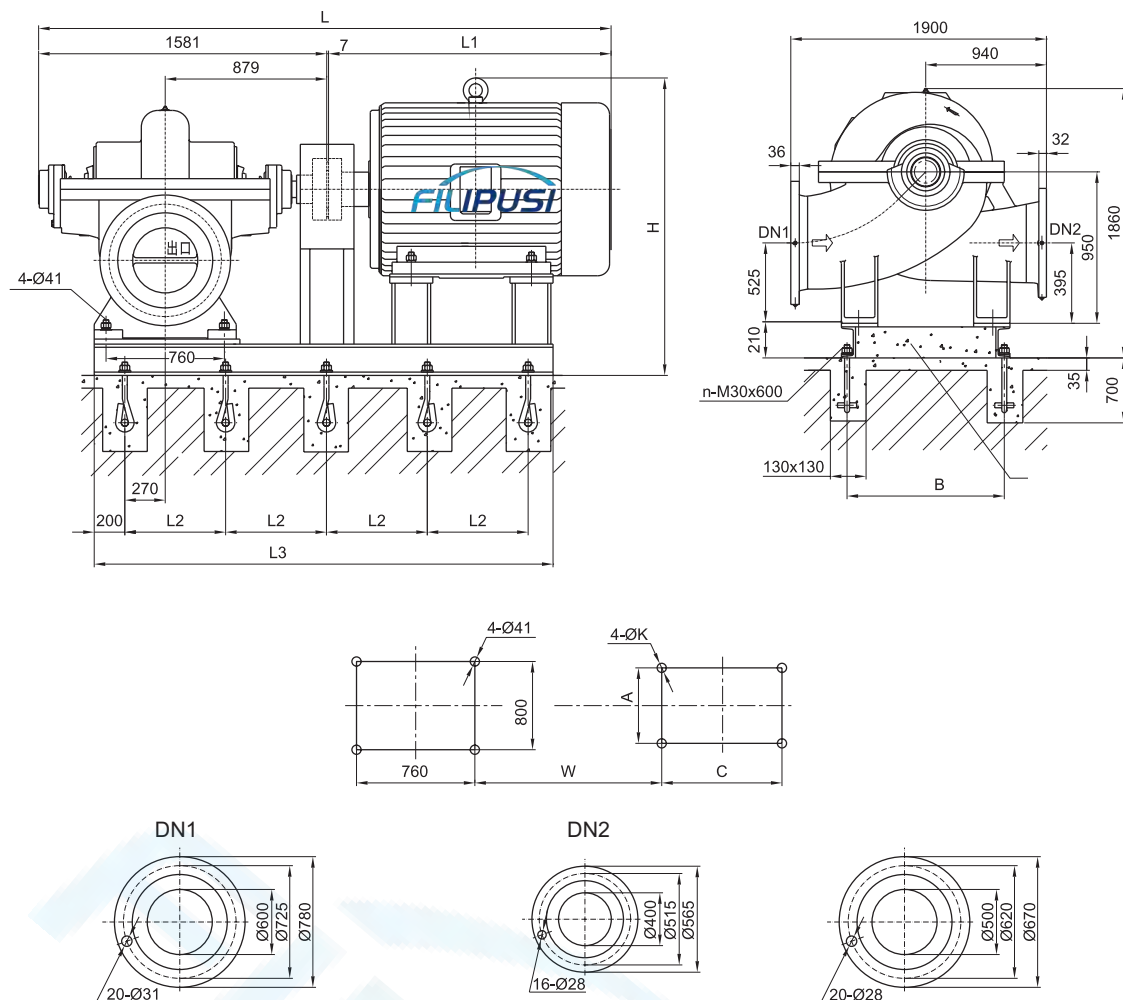


泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)										重量 Weight (kg)		地脚数量
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	W	A	C	K	电机 Motor	底座 Baseplate	n(个)
CW600-400/400A	450-6	6000		560~450	3698	2120	720	3330	960	1645	1111	800	1120	35	3500	795	10
	400-6	6000		400~315	3528	1940	880	3156	960	1595	1051	710	1000	35	2590	784	8
	500-6	10000		560~500	3788	2200	780	3570	1050	1710	1231	900	1250	42	4600	820	10
	450-6	10000		450	3638	2050	720	3320	960	1660	1071	800	1120	35	3377	805	10
	450-6	10000		400~315	3638	2050	720	3320	960	1660	1071	800	1120	35	3175	805	10
	400L-6	380		400	3468	1890	800	2888	960	1850	996	686	710	35	3400	762	8
	400MX-6	380		355	3468	1890	800	2888	960	1850	996	686	630	35	3100	762	8
	400M-6	380		315	3468	1890	800	2888	960	1850	996	686	630	35	3200	762	8


CW600-500

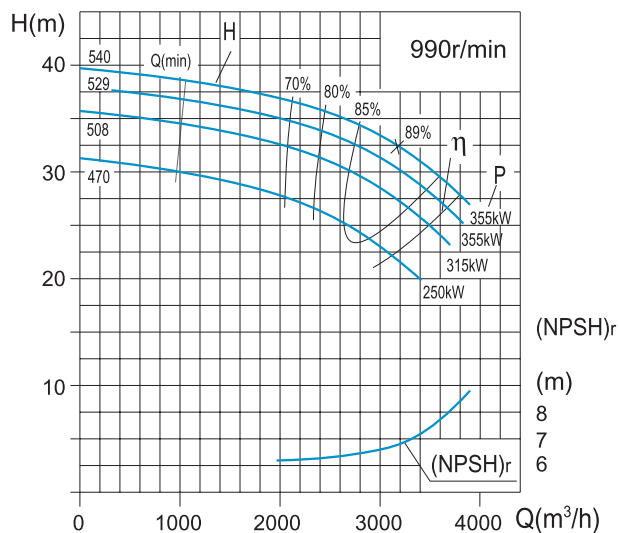

CW600-500A

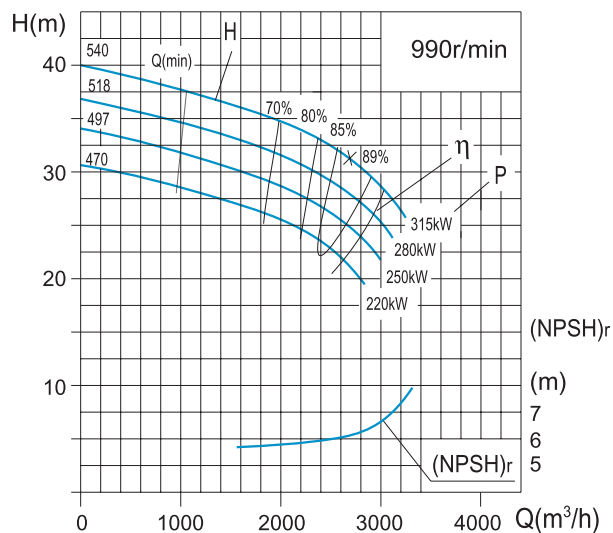


泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW600-500	540	1902	528.3	37	990	289.0	355	67	6.7	2555
		3170	880.6	32		313.6		89		
		3804	1056.7	25		344.3		76		
	529	1864	517.8	36	990	276.1	355	66	6.6	2554
		3107	862.9	31		298.5		88		
		3728	1035.5	24		328.4		75		
	508	1788	496.6	33	990	247.4	315	65	6.5	2552
		2980	827.7	29		266.5		87		
		3576	993.3	22		293.7		74		
	470	1655	459.7	28	990	199.2	250	64	6.1	2550
		2758	766.1	24		213.7		86		
		3309	919.3	19		236.0		73		
CW600-500A	540	1614	448.3	36	990	263.7	315	60	6.0	2554
		2690	747.2	31		257.5		89		
		3228	896.6	25		289.2		75		
	518	1549	439.3	33	990	237.3	280	59	5.9	2552
		2582	732.2	29		230.5		88		
		3099	878.7	23		259.3		74		
	497	1485	421.4	31	990	212.4	250	58	5.8	2550
		2475	702.3	26		205.2		87		
		2970	842.8	21		231.3		73		
	470	1404	390.0	27	990	182.7	220	57	5.5	2548
		2340	650.0	24		175.5		86		
		2808	780.1	19		198.3		72		

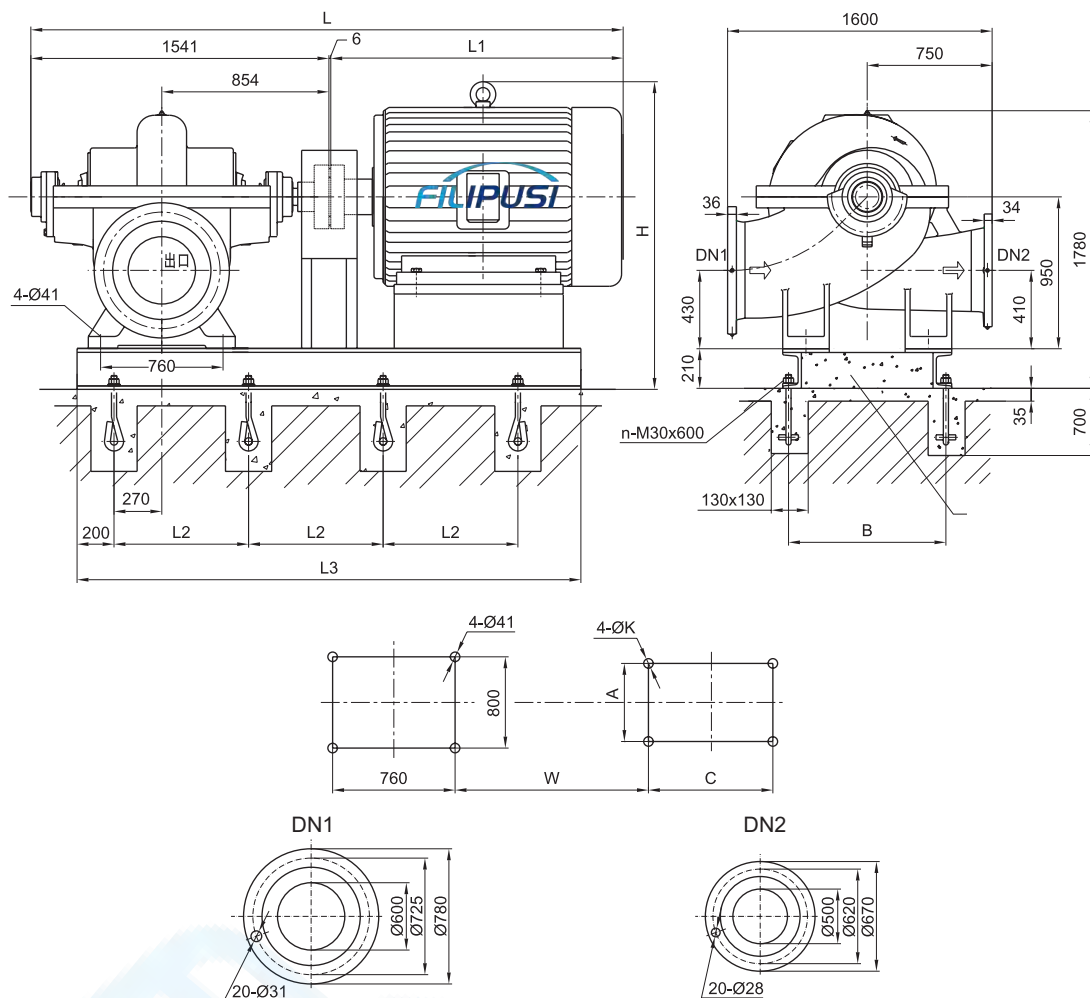


泵型号 Pump type	电动机 Motor				尺寸 Dimensions (mm)										重量 Weight (kg)		地脚数量 n (个)
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	W	A	C	K	电机 Motor	底座 Baseplate	
CW600-500/500A	355L1-6	380		280	3238	1690	700	2650	960	1925	944	610	630	28	1710	620	8
	355M-6	380		250/220	3168	1620	700	2650	960	1925	944	610	560	28	1610	620	8
	400-6	6000		400~280	3486	1940	880	3180	960	1595	1025	710	1000	35	2830	635	8
	355-6	6000		250/220	3437	1890	860	3030	960	1975	1005	630	900	28	1930	630	8
	450-6	10000		400~220	3597	2050	720	3300	960	1660	1045	800	1120	35	3295	645	10
	400L-6	380		400	3436	1890	800	2890	960	1850	970	686	710	35	3400	625	8
	400MX-6	380		355	3436	1890	800	2890	960	1850	970	686	630	35	3200	625	8
	400M-6	380		315/280	3436	1890	800	2890	960	1850	970	686	630	35	3100	625	8
	355L1-6	380		250/220	3116	1570	700	2650	960	1850	904	610	630	28	1820	620	8


CW600-500

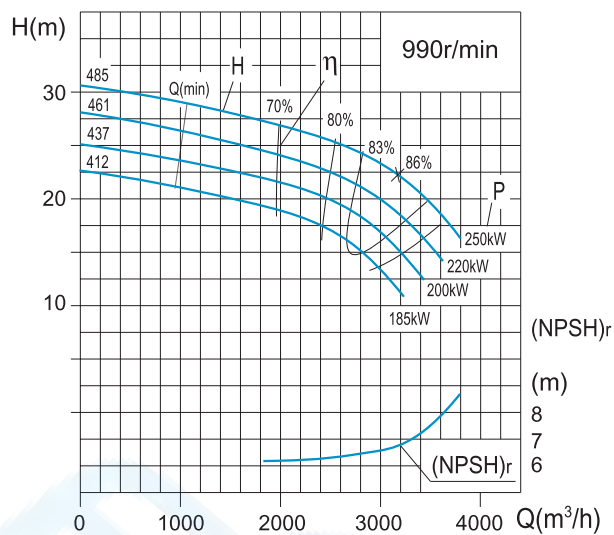

CW600-500A

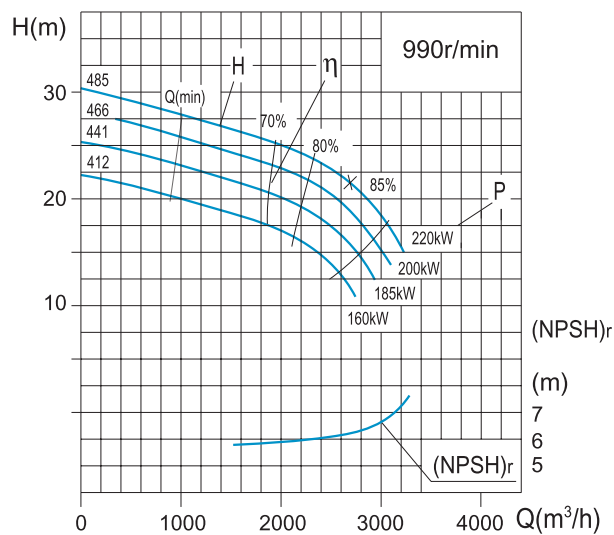

泵 型 号 Pump type	规格 Standards	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 (kW)		效率 Efficiency %	(NPSH) r (m)	泵重 Weight (kg)
		(m³/h)	(L/S)			轴功率 Shaft Power	电机功率 Motor power			
CW600-500	485	1902	528.3	27	990	199.0	250	71	6.7	2506
		3170	880.0	22		223.1		86		
		3804	1056.7	15		206.6		76		
	461	1807	501.9	25	990	173.1	220	70	6.5	2504
		3012	836.5	20		193.6		85		
		3614	1003.8	14		179.5		75		
	437	1712	475.5	22	990	149.3	200	69	6.3	2502
		2853	792.5	18		166.5		84		
		3424	951.0	12		154.7		74		
	412	1617	449.1	20	990	127.6	185	68	6.0	2500
		2695	748.5	16		142.0		83		
		3233	898.2	11		132.1		73		
CW600-500A	485	1614	448.3	26	990	181.6	220	64	6.0	2505
		2690	880.0	22		185.4		85		
		3228	896.6	15		173.5		75		
	466	1549	434.9	24	990	163.2	200	63	5.9	2503
		2582	742.8	20		166.0		84		
		3099	869.7	14		155.6		74		
	441	1469	416.9	22	990	141.3	185	62	5.7	2501
		2448	694.9	18		143.1		83		
		2937	833.8	12		134.3		73		
	412	1372	381.1	19	990	117.0	160	61	5.4	2499
		2286	635.1	16		118.0		82		
		2744	762.1	11		111.0		72		

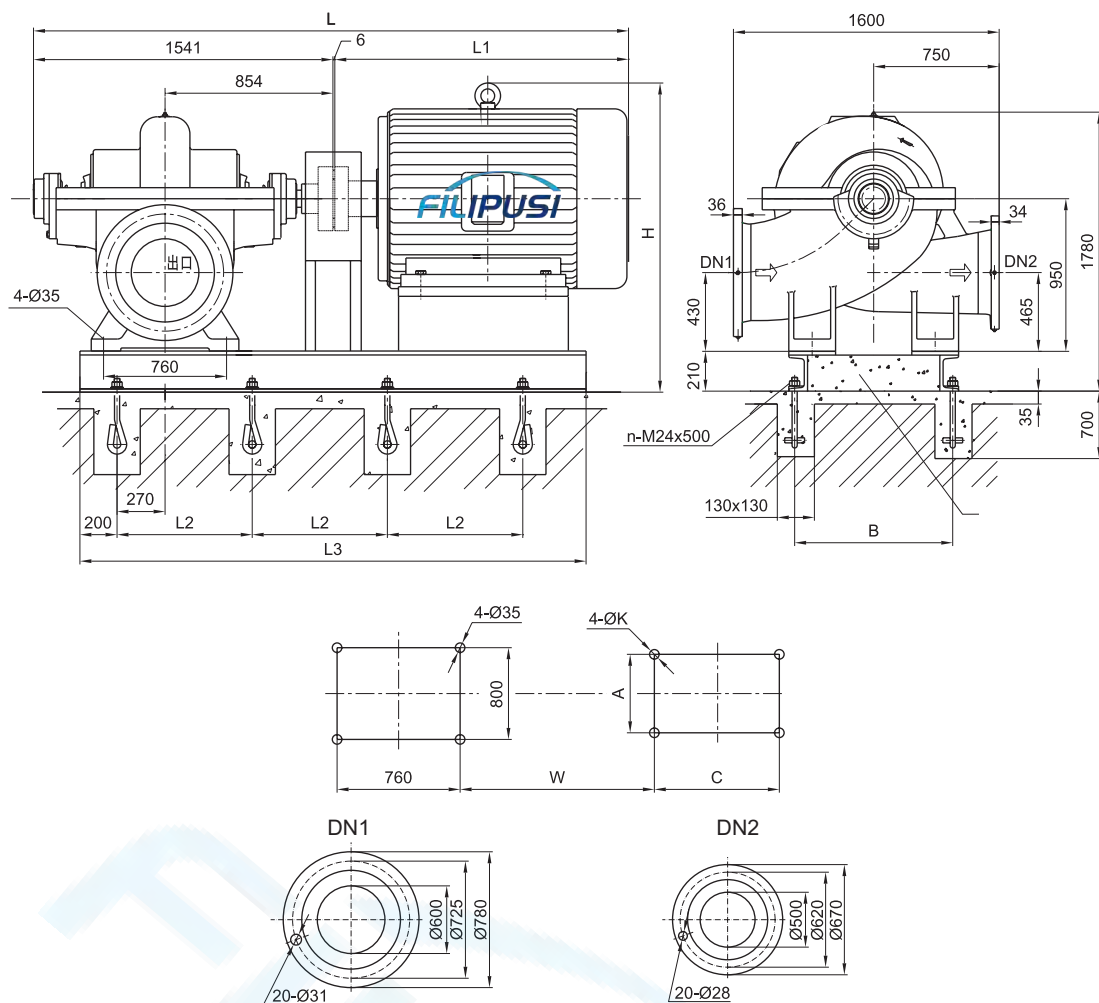

泵 型 号 Pump type	电 动 机 Motor				尺 寸 Dimensions (mm)											重量 Weight (kg)	地脚 数量 n (个)
	型号 Type	电压 Voltage(V)	防护式 Protection	功率 Power (kW)	L	L1	L2	L3	B	H	W	A	C	K	电机 Motor	底座 Baseplate	
CW600-500/500A	355M-6	380		250/220	3167	1620	700	2650	960	1925	944	610	560	28	1610	600	8
	355M-6	380		200/185	3167	1620	700	2650	960	1925	944	610	560	28	1450	600	8
	315M-6	380		160/132	2817	1270	650	2360	960	1775	866	508	457	28	1050	597	8
	355-6	6000		250~200	3437	1890	860	3030	960	1975	1005	630	900	28	1930	630	8
	450-6	10000		250~200	3597	2050	720	3300	960	1660	1045	800	1120	35	2850	645	10
	355L-6	380		250/220	3116	1570	700	2650	960	1845	904	610	630	28	1820	600	8
	355M ₃ -6	380		200	3116	1570	700	2650	960	1845	904	610	560	28	1800	600	8
	355M-6	380		185/160	3116	1570	700	2650	960	1845	904	610	560	28	1730	600	8
	315L2-6	380		132	2886	1340	650	2360	960	1720	866	508	508	28	1175	597	8

More Features to Improve Performance, Efficiency and Your Bottom Line*

1 Mechanical Seal Extends Life

Introducing FILIPUSI's proprietary mechanical seals, in a wide range of types and materials to handle critical industrial applications. Durable carbon/silicon carbide with EPDM elastomer seal is standard.

2 Stainless Steel Impeller Reduces Downtime

Standard 304SS impeller resists corrosion from process fluids to boost performance. For more aggressive applications, upgrade to 316, Duplex, or Super Duplex stainless steel.

3 Impeller and Casing Wear Rings Increase Efficiency

Standard wear rings protect against abrasion and debris, reduce downtime and simplify maintenance while avoiding costly impeller or casing replacement. Impeller wear rings are standard with any impeller combination.

4 Casing Material Options Add Flexibility


Standard casing options include cast iron or ductile iron. Customize with 304, 316, Duplex, or Super Duplex stainless steel to meet your operating environment demands.


5 Labyrinth Seal Strengthens Protection

A bearing frame labyrinth seal comes standard, protecting against wear, heat, frictional power loss and debris. Prevent leakage and ensure a cleaner, safer work environment while minimizing maintenance and extending pump life.

6 Monitoring Ports Increase Visibility

Every FLPS pump contains dual axis vibration and temperature sensor ports, as standard. Optional sensor interfaces can be connected to plant control systems for enhanced monitoring and diagnostics. Catch issues early to prevent failures and provide peace of mind.

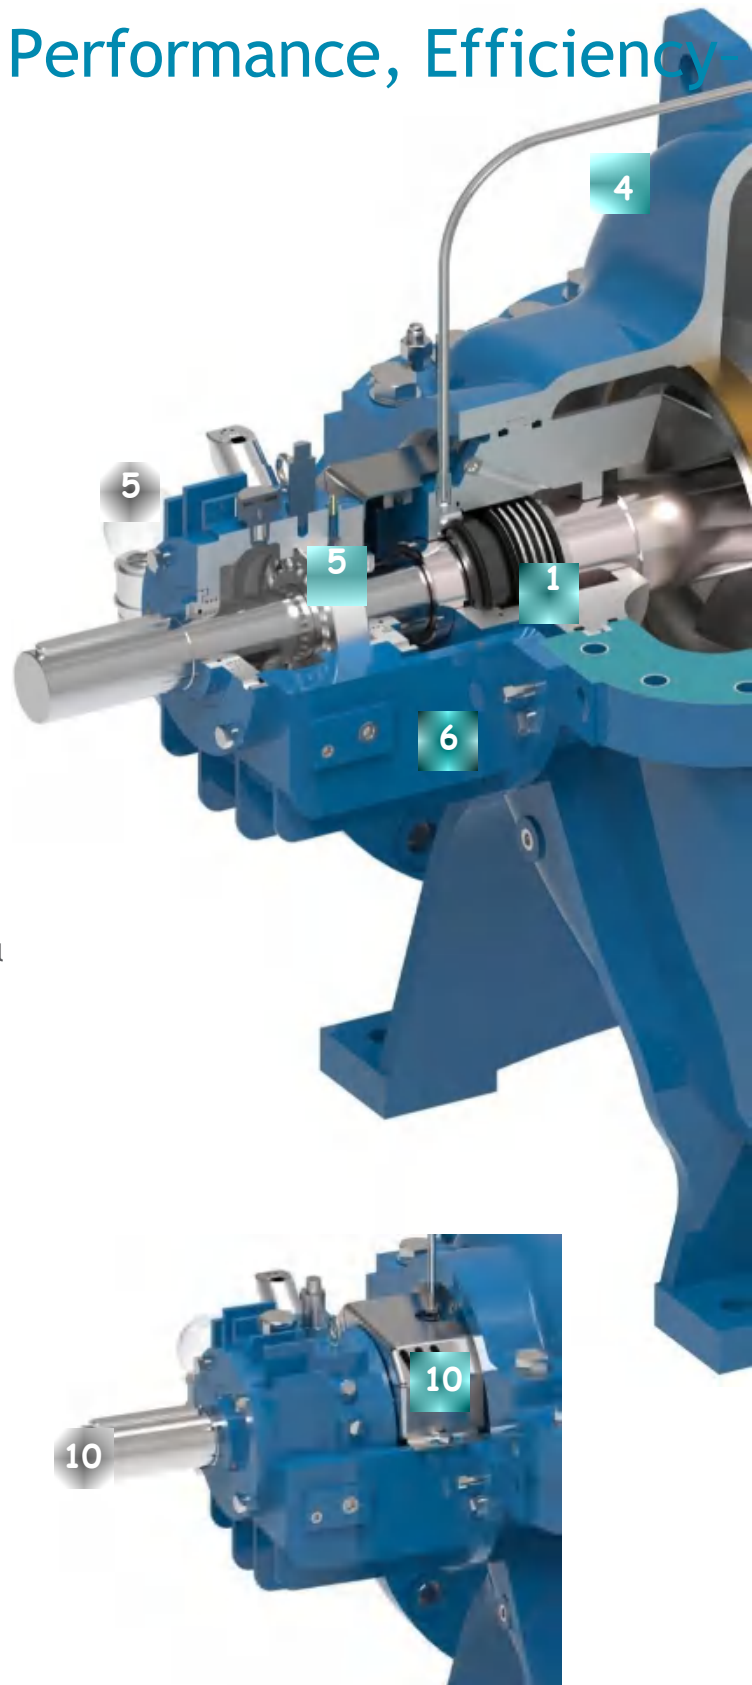

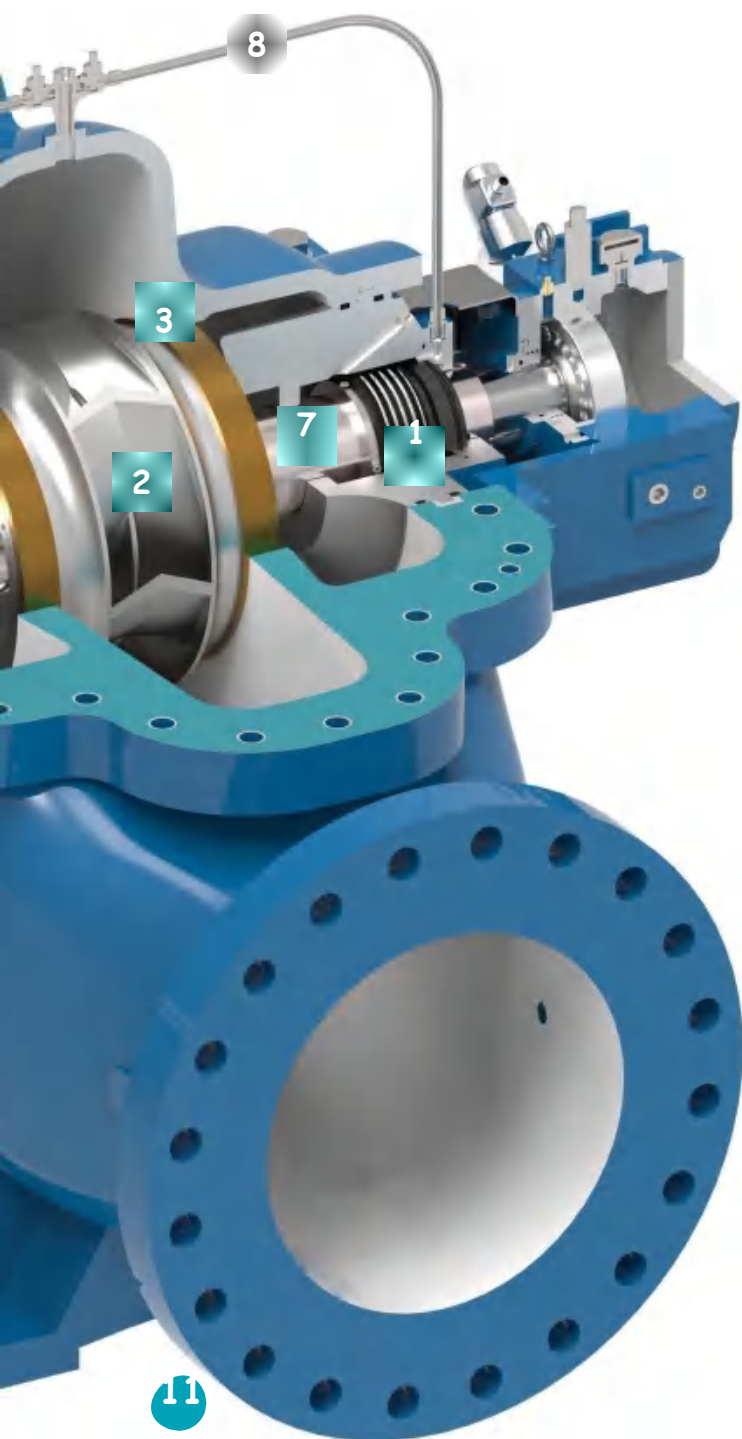

7 Shaft Sleeve Minimizes Repair Costs

Easily replaced sleeves minimize shaft wear from corrosive and abrasive liquids, reducing repair and/or replacement costs. Standard is 304 stainless steel; upgrade to 316, Duplex, or Super Duplex stainless steel for aggressive environments.

8 Flush Line Extends Seal Life

Robust, corrosion-resistant stainless steel external flush line makes it easy to clean and cool the mechanical seal, extending seal life. Standard is 304 stainless steel; upgrade to 316 for more demanding applications.

9 Motor Alignment Screws Speed Up Installation

Eight standard screws on frame size 215 or larger take the hassle out of motor and coupling installation.

10 Shaft and Coupling Guards Support Safety

Ensure safety despite exposed shaft design at no extra cost. Guard components reduce noise while protecting operators from high-speed rotating elements.

11 NSF/ANSI 61 and 372 Certified Construction*

Standard construction FLPS pumps are certified to NSF/ANSI/CAN 61 and 372 standards for potable water applications. There is no need for additional coating(s).

* Standard construction (dry shaft) cast iron, ductile iron or CF8 (316 SS) enclosed FLPS pumps, fitted with either CF8 (304 SS) or CF8M (316 SS) impeller and impeller wear rings, and bronze or 2205 (duplex) SS or Nitronic 60 casing wear rings are certified to both NSF/ANSI/CAN 61 and 372 standards. Standard construction pumps are certified for use with either MR1 (C/SiC/EPDM) metal pusher and MR2 (C/SiC/EPDM) rubber bellows mechanical seals. Optional wet shaft construction FLPS pumps with either 420 SS shaft with the same casing, impeller assembly, and mechanical seal configurations listed above are also certified to NSF/ANSI/CAN 61 and 372 standards.



More Control with Enhanced Monitoring and Sensors

Opportunities to cut pump energy use include smart hydraulic system design, retrofitting for variable speed performance, and operating practices. To build and operate an efficient water system, you need both the right products and experts who know the application. IPC controllers have been designed by FILIPUSI's engineers to help you achieve your goals. With the help of the IPC variable speed controller, you can optimize pump operations and reduce energy costs by as much as 70%.

IPC variable speed controller

The IPC variable speed controller is optimized for FLPS pumps, adding capabilities including multipump configuration and remote monitoring. This controller manages pump energy consumption, leading to significant energy savings.



Features

- Easier start-up and programming with Start-Up Genie
- Wide range of standard and permanent magnet motors with power up to 600 hp
- Multi-pump configuration for up to four (4) pumps - no need for PLC
- Remote commissioning and monitoring with USB Connectivity and software
- Developed by pump experts and optimized for controlling pumps
- Two wire multi-pump connection for faster installation
- Hand on, off, and auto-on buttons available for easy pump operation at the keypad. No toggling between local and remote operation
- System redundancy with multi-master control in case of drive failure
- Wide range of voltage and enclosure options
- True 208 V coverage
- Dedicated single phase input
- In-panel or handheld keypad with backlit display
- Alarm Log for last 5 alarms and maintenance events
- EMC/RFI filters and Dual DC-link reactors to reduce drive noise emissions and interference
- I/O expansion cards, factory installed or field configured

More Visibility Providing Peace of Mind

Every FLPS pump contains dual axis vibration and temperature sensor ports to help manage the operating efficiency of your pump and establish preventative maintenance protocols. Multiple sensor monitoring ports for pressure, vibration and temperature are standard. Sensors are also available as optional accessories for added pump condition monitoring.



More Options to Suit Even More Applications



POWER GENERATION



OIL & GAS



GENERAL
MANUFACTURING



POOL & LEISURE



MINING



WATER UTILITIES

For more than a century, FILIPUSI's pump technologies and solutions have satisfied customers all over the world. The FLPS pump continues that tradition, taking industrial thinking to a new level with more options, more materials and a broader hydraulic range. Here are just a few of the markets and applications where we're helping customers solve their most complex water and fluid management challenges.

Applications

- Water intake
- Water transfer and circulation
- Pressure boosting
- Process cooling and heating
- Industrial building cooling and heating
- Industrial fluid transfer and transport
- Produced water transfer and boosting
- Boiler feed booster
- Water park applications

Pumped Fluids

- Groundwater
- Potable water
- Process water
- Gray/used water
- Seawater
- Brackish water
- Industrial fluids
- Heat transfer fluids
- Produced water
- Solvents/oil

Other Standard Features

- Equipped with shaft guards for increased safety and protection against rotating components.
- Short shaft design ensures less deflection and longer bearing life.
- Vibration, temperature and pressure ports standard for easy monitoring.

Vibration Monitoring

PCB Piezotronics Industrial Velocity Transmitter

- Output: 4 to 20 mA
- 0 to 1 in/sec pk
- 3 to 1k Hz
- 2-pin connection

Pump Accessories



Bearing Lubrication

Oil Lubrication Kit

- 4 oz. Trico oiler
- NPT sight glass
- NPT breather vent



Temperature Monitoring

ETS Series

Digital Temperature Sensor

- -58°F to 302°F [-50°C to 150°C]
- Outputs 1 and 2: Switch PNP, N.O./N.C. selectable or 4 to 20 mA, 4-digit display



Pump Selection

Using FILIPUSI's selection software for pump selection will save you time due to its easy to use platform and selection flexibility. With ability to be designed and configured in a multitude of ways, the FILIPUSI FLPS single stage, double suction centrifugal pump is available in a variety of sizes, models and materials which allow you to perfectly configure it for your system requirements.

FILIPUSI Product Cybersecurity:

FILIPUSI values your system security and the availability of your critical services. For more information on FILIPUSI cybersecurity practices or to contact the cybersecurity [More details](#)

Drinking Water
Low Lead Content
NSF/ANSI 61 & 372

NSF/ANSI 61 (*Drinking Water System Components - Health Effects*) is a certification standard for products that come into contact with drinking water. NSF/ANSI 372 (*Drinking Water System Components – Lead Content*) verifies the lead content of drinking water products meets levels determined by the Safe Drinking Water Act. These requirements are based on EPA and Health Canada Requirement.